



DENSI-PAK® 9 VOLT BATTERY HOLDER

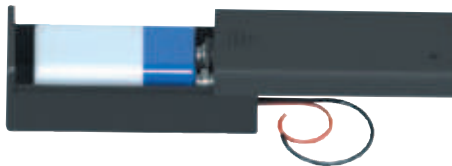

- Positions anywhere for easy access to battery
- Battery held securely in place
- Snap-on cover protects and secures battery against shorting
- Economical design
- Battery contacts provide reliable low resistance connection

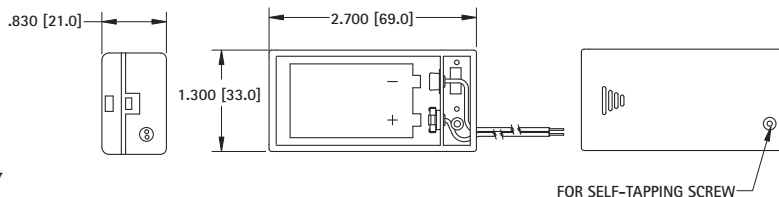

Materials:

Body: ABS plastic

Contacts: Brass, Nickel Plate



Wire Leads: 6.0 (152), #26 AWG, Tinned and stripped, UL/CSA 1007

CAT. NO. 245

DUAL 9 VOLT BATTERY STRAP

This dual battery strap is pre-wired for connecting two 9 Volt batteries. Base made from fibre material with steel, nickel plated contacts. Wires have tinned copper conductors, PVC insulation and the ends are stripped for easy connection. Wires meet UL/CSA #1061 requirements.

PARALLEL

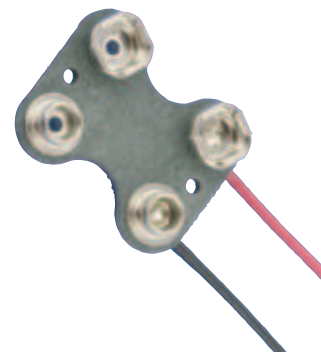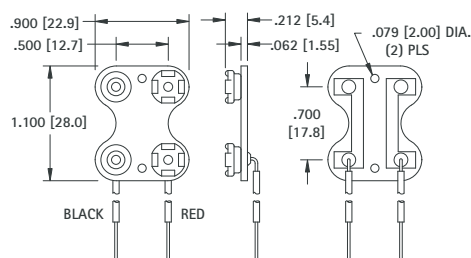

SPECIFICATIONS

Contacts: Steel, Nickel Plate


Wire: 7.0 (177.8) #22 AWG, UL/CSA #1061

End Strip: .375 (9.5) Long, Tinned

CAT. NO. 227

VERTICAL 9 VOLT PC SNAP-ON CONTACT

- Space saving, economical
- Excellent mechanical strength
- Low contact resistance
- Durable fibre base
- Wave solderable
- Anti-Wicking Design



SPECIFICATIONS


Base: .062 (1.57) Fibre

Contacts: Steel, Nickel Plate

Pins: Brass, Tin Plate


CAT. NO.	L LENGTH
967 (with PC Pins)	.120 (3.0)
968 (with PC Pins)	.400 (10.2)
68 (without PC Pins)	-

Mounting Detail



9 VOLT BATTERY RETAINER

- Holds battery securely in place
- Positions anywhere for easy access to battery
- Clearance on end for 9 Volt battery strap

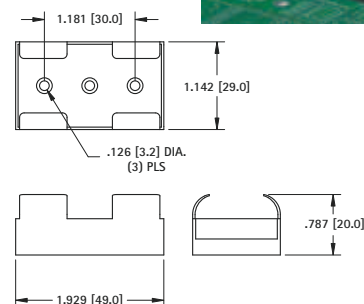

CAT. NO. 239

MATERIAL: Polypropylene


PROTECTIVE BATTERY CAP

- Protects 9 Volt batteries and battery packs when they are not in use
- Snap-fits onto battery contacts
- Protects the battery contacts from damage due to dust, dirt and contamination

MATERIAL:

Impact Resistant Polypropylene, Black

CAT. NO. 96



SHIELDED 9 VOLT BATTERY STRAPS

- Insulates and shields 9 Volt battery snap-on connector contacts
- Assures safe secure use, reduces the potential of short circuits and prevents tampering with battery contacts
- Protects circuits, prevents unwanted electrical discharge due to unintended grounding
- Protects battery contacts from dust, dirt, and physical damage
- Ideal for rugged applications, made of high impact molded plastic with integral wire lead strain relief

Modifications available with different wire lengths.



SPECIFICATIONS

Base: ABS

Male/Female Contacts: Brass, Nickel Plate

Wires (Red & Black): #26 AWG, Tinned, .187 (4.8) end strip, UL/CSA 1007

*Tolerance on lead length +/- .250 (6.4)



I STYLE		T STYLE	
MOLDED		MOLDED	
CAT. NO.	*LEAD LENGTH	CAT. NO.	*LEAD LENGTH
84-4	4.00 (102)	81-4	
84-6	6.00 (152)	81-6	
84-8	8.00 (203)	81-8	

PREMIUM 9 VOLT BATTERY STRAPS

- Fully Assembled
- Rigid Assembly
- Ideal for rugged applications, made of high impact molded plastic with integral wire lead strain relief

Rigidly constructed. Nickel plate, male and female contacts. Female contacts are spring temper. Accepts numerous insertions to meet U.L. approved standards. Provides excellent mechanical strength and low contact resistance. Wires have tinned copper conductors, PVC insulation and the ends are stripped for easy connection.

Wires are rated to +176°F (+80°C) and 300V and meet UL/CSA 1007 requirements.

Modifications available with different wire lengths.

SPECIFICATIONS

Contacts: Phosphor Bronze, Nickel Plate

Wire: #26 AWG, UL/CSA 1007

End Strip: .250 (6.4) Long, Tinned

Base: Polyethylene

*Tolerance on lead length +/- .250 (6.4)



Base Size:
1.062 (27.0) x .512 (13.0)

I STYLE		T STYLE	
MOLDED		MOLDED	
CAT. NO.	*LEAD LENGTH	CAT. NO.	*LEAD LENGTH
2238	4.00 (102)	2241	
2239	6.00 (152)	2242	
2240	8.00 (203)	2243	



Base Size:
1.00 (25.4) x .512 (13.0)

ECONOMY 9 VOLT BATTERY STRAPS

- Fully Assembled
- Rigid Assembly

When product cost is of the utmost importance these economy battery straps will suit your needs. Brass contacts, nickel plated with vinyl or ABS covering. Wires have tinned copper conductors, PVC insulation and the ends are stripped for easy connection. Wires meet UL/CSA 1007 requirements.

Modifications available with different wire lengths


SPECIFICATIONS

Contacts: Brass, Nickel Plate


Wire: #26 AWG, UL/CSA 1007

End Strip: .250 (6.4) Long, Tinned

*Tolerance on lead length +/- .250 (6.4)



Molded ABS Base Size:
.984 (25.0) x .469 (11.9)
(Strain Relief)

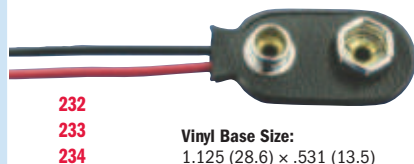

Vinyl Base Size:
1.125 (28.6) x .531 (13.5)

I STYLE			T STYLE		
MOLDED		VINYL	MOLDED		VINYL
CAT. NO.	CAT. NO.	*LEAD LENGTH	CAT. NO.	CAT. NO.	*LEAD LENGTH
232-M	232	4.00 (102)	235-M	235	
233-M	233	6.00 (152)	236-M	236	
234-M	234	8.00 (203)	237-M	237	



Molded ABS Base Size:
.965 (25.0) x .528 (13.4)
(Strain Relief)



Vinyl Base Size:
1.000 (24.5) x .532 (13.5)