
BURR-BROWN®

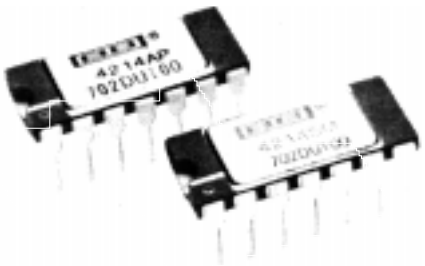

4214

MULTIPLIER - DIVIDER

FEATURES

- DIFFERENTIAL INPUTS
- LASER-TRIMMED
- GUARANTEED ACCURACY
  0.5% and 1%
- SELF-CONTAINED
  No additional parts required
- LOW NOISE
  120Vrms, 10Hz – 10kHz
- DIP PACKAGE

APPLICATIONS

- MULTIPLICATION
- DIVISION
- SQUARING
- SQUARE ROOTING
- ADAPTIVE CONTROL
- ALGEBRAIC COMPUTATION
- POWER COMPUTATION

DESCRIPTION

The 4214 family of multipliers are low-cost integrated circuit multiplier/dividers designed for general purpose usage. In addition to four-quadrant multiplication, they also perform division and square rooting of analog signals. They do not require use of additional amplifiers to perfrom these functions. The 4214 is laser-trimmed prior to final packaging and is guaranteed to its rated accuracy with no external components—a distinct advantage from standpoints of cost and reliability.

The 4214 contains its own zener-regulated references and, as a result, is much less sensitive to supply voltage variation than were earlier IC multipliers. The multipliers' output noise is only 120Vrms in a 10Hz to 10kHz bandwidth.

The unit is packaged in a 14-pin ceramic DIP package and available in both −25°C to +85°C and −55°C to +125°C specification temperature ranges.

International Airport Industrial Park • P.O. Box 11400 • Tucson, Arizona 85734 • Tel.: (602) 746-1111 • Twx: 910-952-1111 • Cable: BBRCORP • Telex: 66-6491

© 1978 Burr-Brown Corporation

SBOS176

Printed in U.S.A. July, 1987

SPECIFICATIONS

ELECTRICAL

Typical performance at +25°C with rated power supplies unless otherwise noted.

MODEL	4214AP/RM	4214BP/SM
OUTPUT FUNCTION	$\frac{(X_1 - X_2)(Y_1 - Y_2)}{10} + Z_2$	
TOTAL ERROR[1]		
Without Trimming	1% max	0.5% max
Error vs Temperature (-25°C to +85°C), (AP and BP)	0.008%/°C typ., 0.02%/°C max	
(-55°C to +125°C), (RM and SM)	0.025%/°C typ., 0.05% °C max	
Error vs Supply	0.05%/%	
INDIVIDUAL ERRORS		
Output Offset	10mV typ	7mV typ
	50mV max	25mV max
vs Temperature	0.7mV/°C typ	0.3mV/°C typ
	2mV/°C max	0.7mV/°C max
vs Supply	0.25mV/%	
Scale Factor Error	0.12%	
vs Temperature	0.008%/°C	
vs Supply	0.05%/%	
Nonlinearity		
X(X = 20V p-p, Y = ±10VDC)	±0.08%	
Y(Y = 20V p-p, X = ±10VDC)	±0.01%	
Feedthrough at 50 Hz		
X = 20V p-p, Y = 0	30mV p-p	
Y = 20V p-p, X = 0	6mV p-p	
vs Temperature	0.1mV p-p/°C	
vs Supply	0.15mV p-p/%	
AC PERFORMANCE		
Small Signal ±3dB Flatness	610 kHz	
Small Signal ±1% Flatness	90 kHz	
Small Signal ±1% Vector Error (0.57° Phase Shift)	7.5 kHz	
Full Power Bandwidth	330 kHz	
Slew Rate	23V/µs	
Settling Time to 1% (20V step)	1.7µs	
OUTPUT NOISE (X = Y = 0)		
10 Hz to 10 kHz	120µV rms	
10 Hz to 10 MHz	700µV rms	
INPUT CHARACTERISTICS		
Input Voltage Range		
Rated Operation, min.	±10V	
Absolute max	±V_s	
Input Impedance, X, Y, Z[2]	10 MΩ	
Input Bias Current, X, Y, Z	1.4µA	
OUTPUT CHARACTERISTICS		
Rated Output	±10V at ±5mA min	
Output Impedance	1.5Ω	
POWER SUPPLY REQUIREMENTS		
Rated Voltage	±15V	
Operating Range	±8.5VDC to ±20VDC	
Quiescent Current	±5.5mA	
TEMPERATURE RANGE		
Rated Performance (specification) AP and BP	-25°C to +85°C	
Rated Performance (specification) RM and SM	-55°C to +125°C	
Operation	-55°C to +125°C	
Storage	-65°C to +150°C	

1. Total error is the maximum allowed value of the sum of the individual errors.
2. Z_2 input impedance is 10 MΩ typ with Pin 11 open circuit. If Pin 11 is grounded or used for optional offset adjustment the Z_2 input impedance may become as low as 25kΩ.

MECHANICAL

Ceramic Dual-In-Line

NOTE: Leads in true position within 0.010" (0.25mm) R at MMC at seating plane.

Pin numbers shown for reference only. Numbers may not be marked on package.

DIM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	670	710	17.02	18.03
C	065	170	1.65	4.32
D	015	021	0.38	0.53
F	045	060	1.14	1.52
G	100 BASIC		2.54 BASIC	
H	025	070	0.64	1.78
J	008	012	0.20	0.30
K	120	240	3.05	6.10
L	300 BASIC		7.62 BASIC	
M	—	10°	—	10°
N	009	060	0.23	1.52

CONNECTION DIAGRAM

TYPICAL PERFORMANCE CURVES

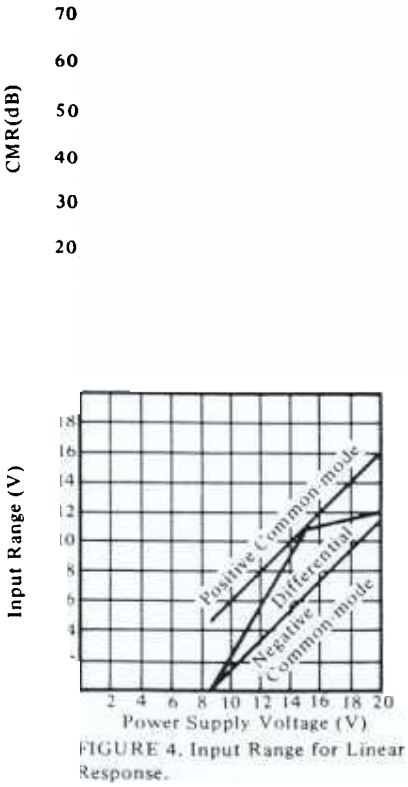


FIGURE 4. Input Range for Linear Response.

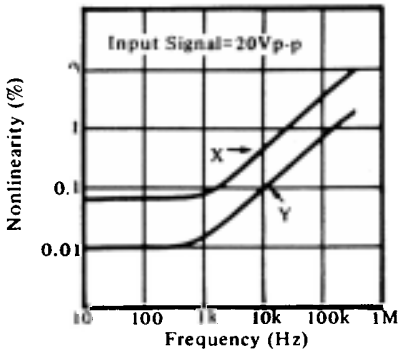


FIGURE 5. Nonlinearity vs. Frequency.

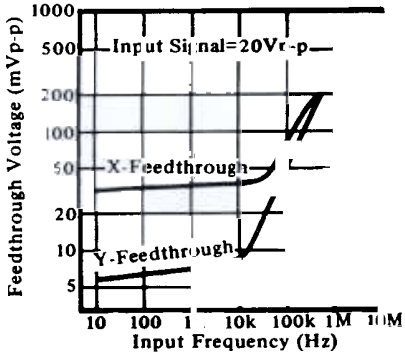


FIGURE 6.Feedthrough vs. Frequency.

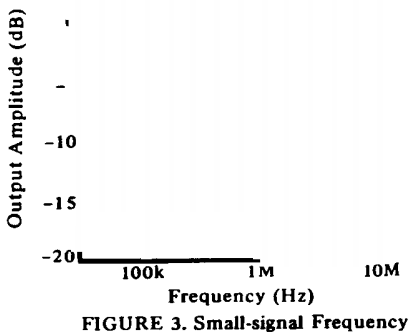


FIGURE 3. Small-signal Frequency Response.

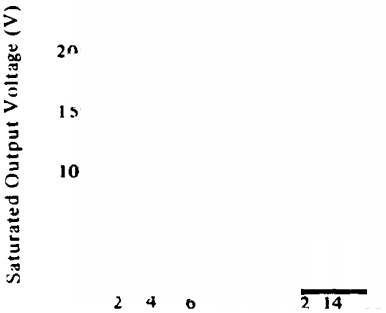


FIGURE 7. Max. Output Voltage vs. Output Current.



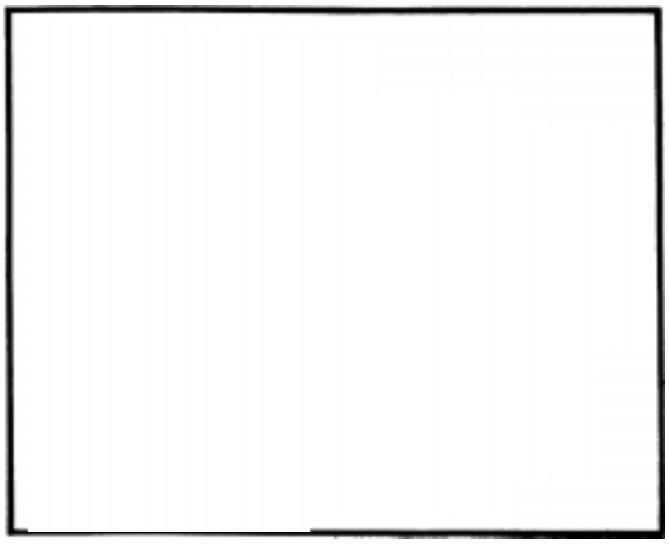


FIGURE 10. Simplified Equivalent Circuit.

OPERATING MODES MULTIPLICATION

The 4214 is a general purpose multiplier/divider with three sets of differential inputs viz. X, Y, and Z. Its open-loop transfer function is

$$e_o = A\left[\frac{(X_1 - X_2)(Y_1 - Y_2)}{10} - (Z_1 - Z_2)\right]$$

where, A is the open-loop gain of the internal output amplifier (see the simplified equivalent circuit, Figure 10). Due to very high gain ($A \rightarrow \infty$) of the output amplifier the feedback from the output to any of the inputs will establish the relationship

$$Z_1 - Z_2 = (X_1 - X_2)(Y_1 - Y_2)/10$$

Taking output at Z_1 the multiplication mode transfer function is obtained and is expressed as

$$e_o = \frac{(X_1 - X_2)(Y_1 - Y_2)}{10} + Z_2.$$

This connection of 4214 is shown on page 2.

DIVISION

The 4214 may be used as a two quadrant divider, without the need for an external op amp. Note that the maximum output error in the divide mode is given approximately by,

$$\text{Divider error} \simeq \frac{10 \in m}{X_1 - X_2}, \text{ where } \in m \text{ is}$$

the total error specified for the multiply mode. The divider error, as shown above, becomes excessively large for small values of $(X_1 - X_2)$. A 10:1 denominator range is usually the practical limit. This is true for all such units, where a multiplier is used in voltage feedback mode to generate "divide" function.

If more accurate division is required over wide range of denominator voltages, the Burr-Brown model 4291 is recommended (0.25% max error over 100:1 range).

For optimum performance, the Z offset should be nulled by letting the input be zero and adjusting R_1 for zero output. This offset adjustment will improve the divider error to about $\frac{3 \in m}{(X_1 - X_2)}$ for $(X_1 - X_2)$ much less than 10V.

FIGURE 11. Divide Mode Connections—4214.

SQUARE ROOT

By applying feedback from the output to both the X and Y inputs, the square root function can be obtained. The errors in the square root mode become large for small values of Z input. The actual output is approximately

$$\text{Square root output } e_o = \sqrt{10 (Z_1 - Z_2) + 10 \in m}$$

where $\in m$ is the total error for the multiply mode.

Burr-Brown's multifunction converter model 4302 is recommended for applications requiring more accuracy over wider dynamic range.

The output offset should be nulled for optimum performance by allowing the input to be its smallest expected value and adjusting R_1 for the proper output voltage.

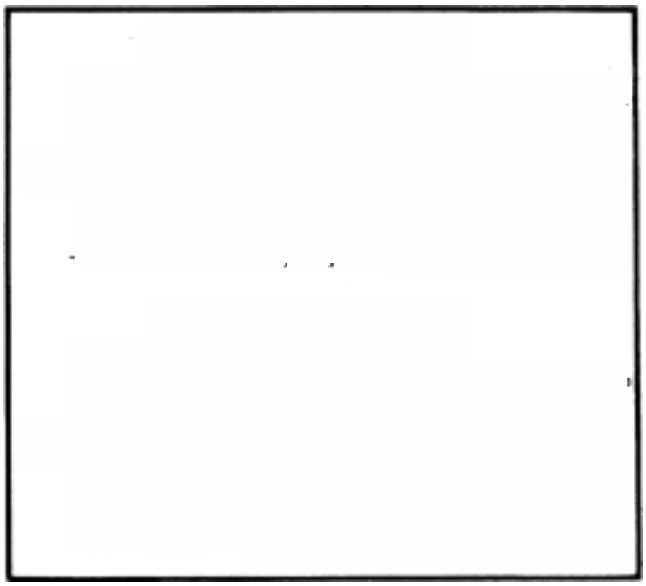


FIGURE 12. Square Root Mode Connections—4214.

SINE FUNCTION GENERATOR

Two 4214's can be connected with implicit feedback as shown in Figure 13 to implement the following sine function approximation.

$$e_o = \frac{1.5715\, e_i - 0.004317\, e_i^3}{1 + 0.001398\, e_i^2} = 10 \text{ Sin } 9\, e_i$$

The theory and procedures for developing virtually any function generator or linearization circuit can be found in the new Burr-Brown/McGraw Hill book "FUNCTION CIRCUIT - Design and Applications."

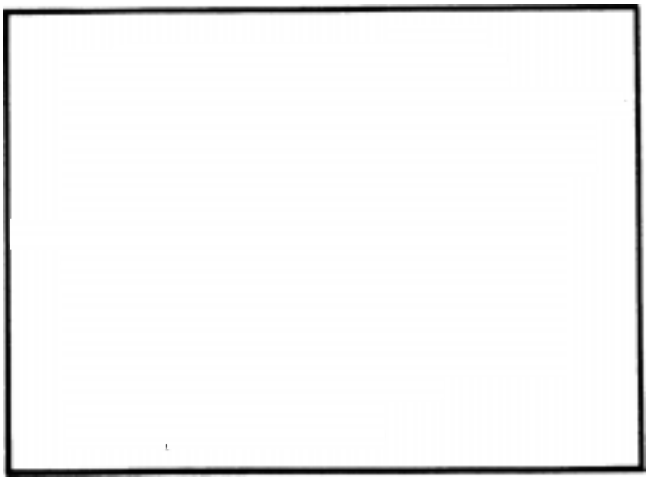


FIGURE 13. Sine Function Connections—4214.

The information provided herein is believed to be reliable; however, BURR-BROWN assumes no responsibility for inaccuracies or omissions. BURR-BROWN assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. BURR-BROWN does not authorize or warrant any BURR-BROWN product for use in life support devices and/or systems.

PACKAGING INFORMATION

ORDERABLE DEVICE	STATUS(1)	PACKAGE TYPE	PACKAGE DRAWING	PINS	PACKAGE QTY
4214AP	NRND	CDIP SB	JD	14	27
4214BP	NRND	CDIP SB	JD	14	27

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		**Applications**	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2003, Texas Instruments Incorporated