


10	9		8	7	6		5	4	3	2	1
MAT'L NO.	ENG. NO.	STUD SIZE	"S" ±.010 (0.25)	"W" MAX	"L" REF	"T" REF					
191640889	SD-656-08	#8	.173 (4.39)	.38 (9.7)	1.46 (37.1)	.045 (1.14)					
191640080	SD-656-10	#10	.198 (5.03)								
191640081	SD-651-14	1/4	.265 (6.73)	.60 (15.2)	1.67 (42.4)						
191640083	SD-651-56	5/16	.328 (8.33)								
191640082	SD-652-38	3/8	.390 (9.91)	.82 (20.8)	1.93 (49.0)	.050 (1.27)					
191640839	SD-652-76	7/16	.453 (11.51)								
191640457	SD-652-12	1/2	.515 (13.08)								

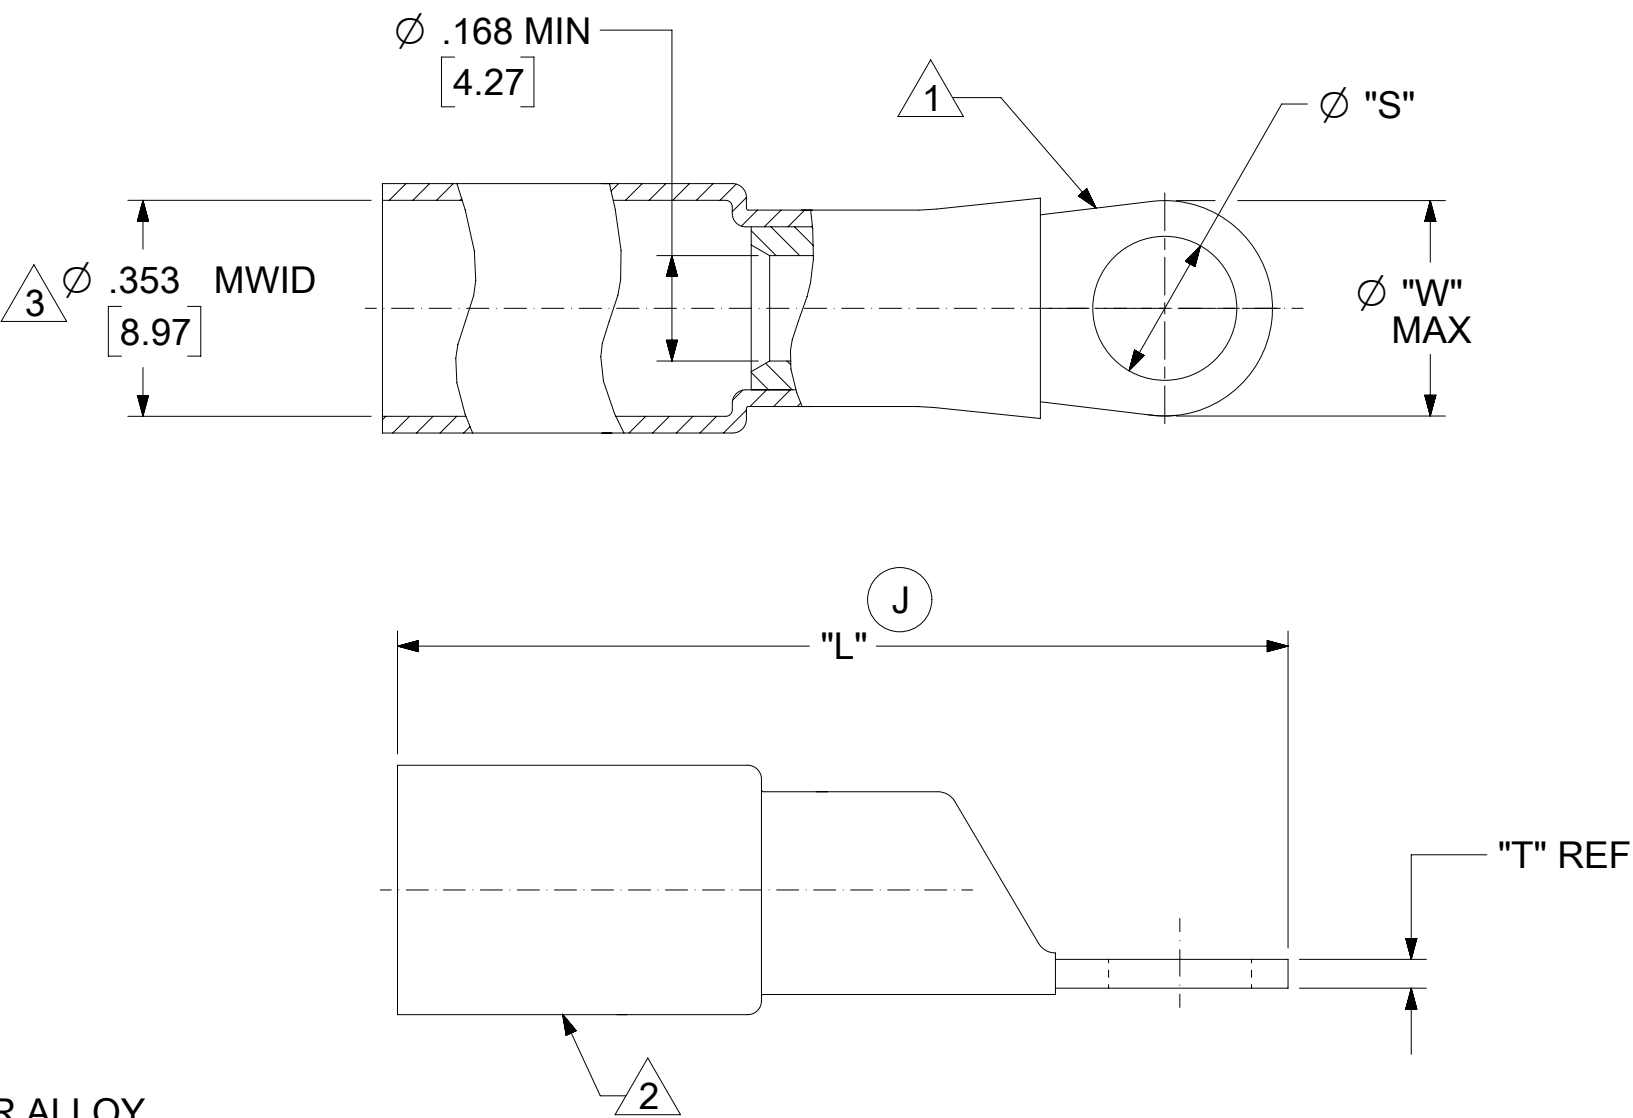

NOTE(S):

- 1 TERMINAL MATERIAL: COPPER ALLOY
FINISH: ELECTRO-TIN PLATE
- 2 INSUL. MATERIAL: HEAT SHRINKABLE TUBING WITH HOTMELT
ADHESIVE INNER LINER
COLOR: RED
- 3 MWID = MAXIMUM WIRE INSULATION DIAMETER.
4. ASSEMBLY IS RoHS COMPLIANT.

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
		DIMENSION UNITS		SCALE		CURRENT REV DESC: "L" DIM WAS MAX				molex		
▽ = 0	INCH/MM		NTS		GENERAL TOLERANCES (UNLESS SPECIFIED)							
▽ = 0												
▽ = 0					EC NO: 800326				RING TONGUE TERMINAL PERMA-SEAL SD-600-SERIES 8 AWG			
▽ = 0												
▽ = 0					DRWN: DEANNM1 2024/09/23				PRODUCT CUSTOMER DRAWING			
▽ = 0												
▽ = 0					CHK'D: ETHRODAHL 2024/10/11							
▽ = 0												
▽ = 0					APPR: ETHRODAHL 2024/10/11							
▽ = 0												
▽ = 0					INITIAL REVISION:				DOCUMENT NUMBER SD-19164-023			
▽ = 0												
▽ = 0					DRWN: DBUNNELL 2000/09/06				DOC TYPE PSD	DOC PART 001	REVISION J	
▽ = 0												
▽ = 0					APPR: RDEROSS 2000/09/13							
▽ = 0												
▽ = 0					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SHEET NUMBER 1 OF 1			
▽ = 0												