

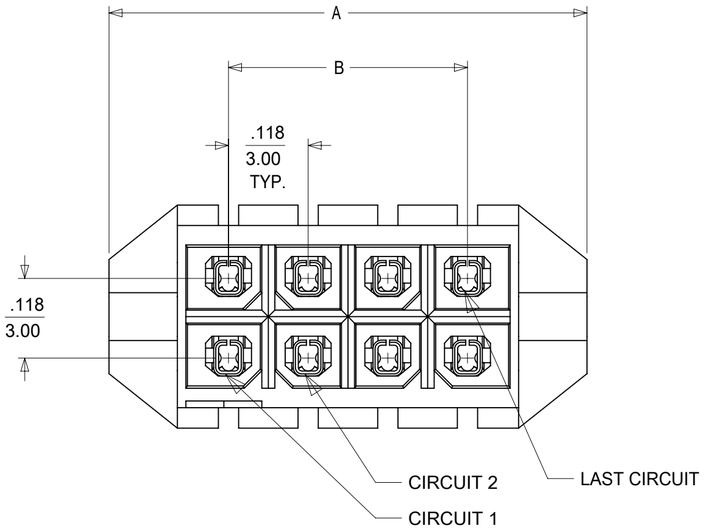


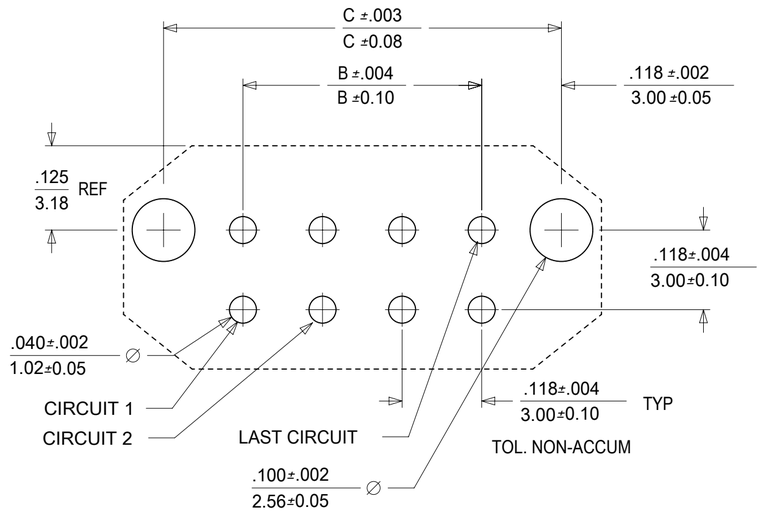



PCB LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS: .062/1.57

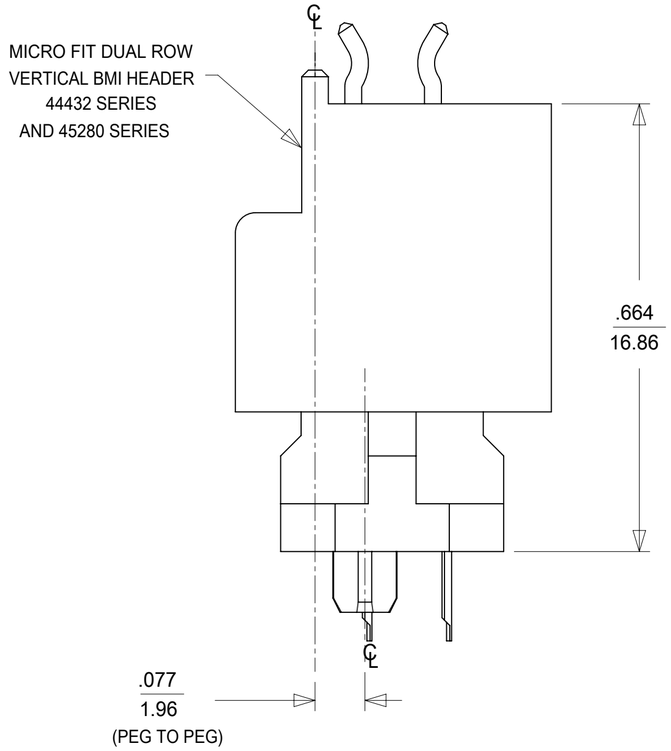


MATED DIMENSIONS

(FOR ALIGNMENT OF PCB'S IN X & Y DIRECTIONS)

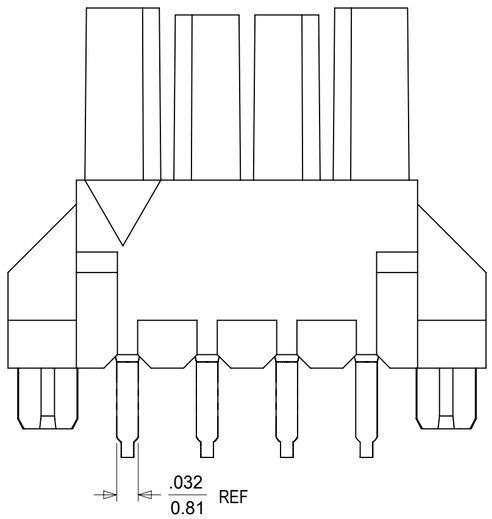

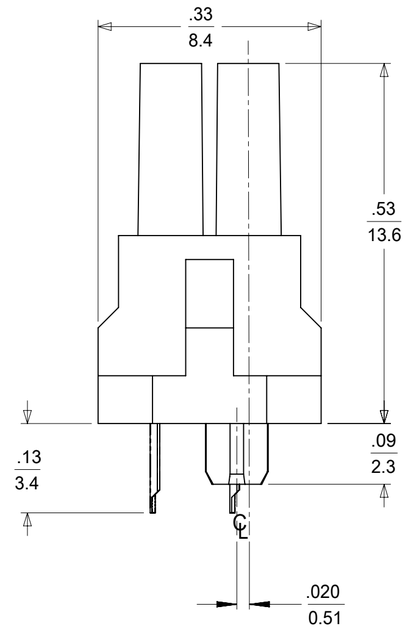

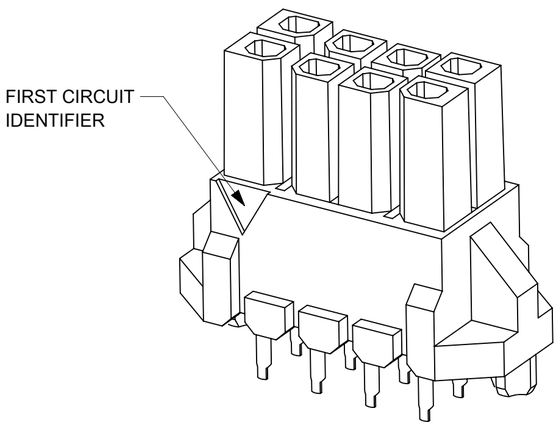

CIRCUIT SIZE	DIM. "A"	DIM. "B"	DIM. "C"
4	.472/(12.00)	.118/(3.00)	.354/(9.00)
6	.591/(15.00)	.236/(6.00)	.472/(12.00)
8	.709/(18.00)	.354/(9.00)	.591/(15.00)
10	.827/(21.00)	.472/(12.00)	.709/(18.00)
12	.945/(24.00)	.591/(15.00)	.827/(21.00)
14	1.063/(27.00)	.709/(18.00)	.945/(24.00)
16	1.181/(30.00)	.827/(21.00)	1.063/(27.00)
18	1.299/(33.00)	.945/(24.00)	1.181/(30.00)
20	1.417/(36.00)	1.063/(27.00)	1.299/(33.00)
22	1.535/(39.00)	1.181/(30.00)	1.417/(36.00)
24	1.654/(42.00)	1.299/(33.00)	1.535/(39.00)

NOTES:
1. MATERIAL:
   HOUSING: LIQUID CRYSTAL POLYMER, GLASS FILLED, UL 94V-0, COLOR - BLACK
   TERMINALS: PHOSPHOR BRONZE ALLOY
2. FINISH:
   (A) = .000100/0.00254 MIN. TIN OVER
   .000050/0.00127 MIN. NICKEL
   (B) = .000015/0.00038 MIN. SELECTIVE GOLD IN CONTACT AREA,
   .000100/0.00254 MIN. SELECTIVE TIN IN PC TAIL AREA,
   BOTH OVER .000050/0.00127 MIN. NICKEL
   (C) = .000030/0.00076 MIN. SELECTIVE GOLD IN CONTACT AREA,
   .000100/0.00254 MIN. SELECTIVE TIN IN PC TAIL AREA,
   BOTH OVER .000050/0.00127 MIN. NICKEL
3. PRODUCT SPECIFICATIONS: PS-44300-001
4. PACKAGING SPECIFICATION: PK-44769-001.
5. THIS HEADER MATES WITH MOLEX MICRO-FIT BMI HEADER SERIES 45280, 44432, AND 44428, AND MOLEX MICRO-FIT BMI PLUG SERIES 44300.
6. MOLEX RECOMMENDS THE USE OF MICRO-FIT TEST PLUG (SERIES 44242) WHENEVER CONTINUITY TESTING IS PERFORMED. TEST PLUGS MUST NOT BE USED TO MAKE OR BREAK UNDER LOAD. MOLEX DOES NOT RECOMMEND USING STANDARD MATING COMPONENTS (SERIES 45280, 44432, 44428, OR 44300) FOR TESTING PURPOSES.
7. THIS PART CONFORMS TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS: mm	SCALE: NTS	CURRENT REV DESC:	molex
GENERAL TOLERANCES (UNLESS SPECIFIED)			MICRO-FIT (3.0) BMI VERTICAL RECEPTACLE HEADER ASSEMBLY, 4 - 24 CIRCUIT
MM / INCH		EC NO: 809327	PRODUCT CUSTOMER DRAWING
4 PLACES ± / ±		DRWN: ZIXUAQ 2024/12/03	DOCUMENT NUMBER: SD-44769-001 / DOC TYPE: PSD / DOC PART: 001 / REVISION: F2
3 PLACES ± / ± 0.01		CHK'D: XQZHANG 2025/01/16	
2 PLACES ± 0.25 / ± 0.014		APPR: XQZHANG 2025/01/16	
1 PLACE ± 0.35 / ±		INITIAL REVISION:	
0 PLACES ± / ±		DRWN: BURLESON 2000/07/13	
ANGULAR TOL ± 0.5 °		APPR: EDGLEY 2000/07/13	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION / DRAWING: C-SIZE / SERIES: 44769	MATERIAL NUMBER: SEE CHART / CUSTOMER: GENERAL MARKET / SHEET NUMBER: 1 OF 2


DOCUMENT STATUS	P1	RELEASE DATE	2025/01/16 00:20:28

FORMAT: Eng-lega-master-tb-prod-C
REVISION: E1
DATE: 2021/05/01


POLARIZATION LAYOUT




4 CIRCUIT

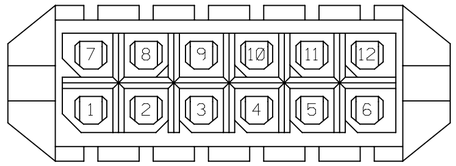


12 CIRCUIT

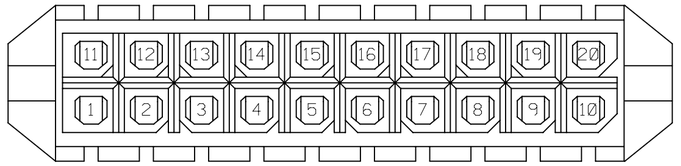


20 CIRCUIT




6 CIRCUIT

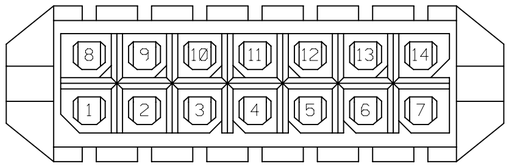


14 CIRCUIT

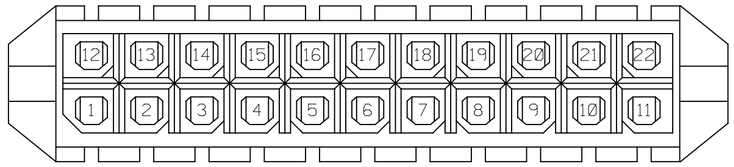


22 CIRCUIT




8 CIRCUIT

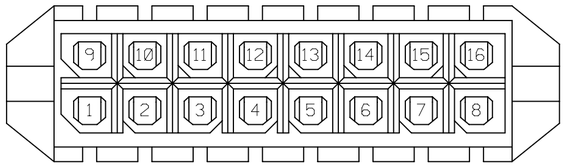


16 CIRCUIT

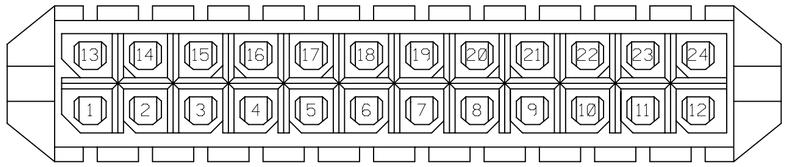

24 CIRCUIT

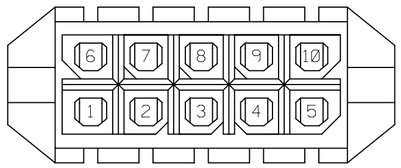

10 CIRCUIT

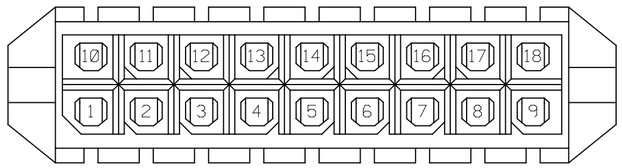

18 CIRCUIT

MATERIAL NUMBER	NUMBER OF POSITIONS	PLATING OPTION
44769-0401	04	A
44769-0402	04	B
44769-0403	04	C
44769-0601	06	A
44769-0602	06	B
44769-0603	06	C
44769-0801	08	A
44769-0802	08	B
44769-0803	08	C
44769-1001	10	A
44769-1002	10	B
44769-1003	10	C
44769-1201	12	A
44769-1202	12	B
44769-1203	12	C
44769-1401	14	A
44769-1402	14	B
44769-1403	14	C
44769-1601	16	A
44769-1602	16	B
44769-1603	16	C
44769-1801	18	A
44769-1802	18	B
44769-1803	18	C
44769-2001	20	A
44769-2002	20	B
44769-2003	20	C
44769-2201	22	A
44769-2202	22	B
44769-2203	22	C
44769-2401	24	A
44769-2402	24	B
44769-2403	24	C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE
mm	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	± 0.01
2 PLACES	± 0.25	± 0.014
1 PLACE	± 0.35	±
0 PLACES	±	±
ANGULAR TOL	± 0.5 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 809327
DRWN: ZIXUAQ 2024/12/03
CHK'D: XQZHANG 2025/01/16
APPR: XQZHANG 2025/01/16

INITIAL REVISION:
DRWN: BURLESON 2000/07/13
APPR: EDGLEY 2000/07/13

molex

MICRO-FIT (3.0) BMI VERTICAL RECEPTACLE HEADER ASSEMBLY, 4 - 24 CIRCUIT

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-44769-001	PSD	001	F2

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	C-SIZE	44769	SEE CHART	GENERAL MARKET	2 OF 2

DOCUMENT STATUS	P1	RELEASE DATE	2025/01/16 00:20:28

FORMAT: Eng-lega-master-tb-prod-C
REVISION: E1
DATE: 2021/05/01