
PT3100 Series 24V

15 WATT 24V TO 5V/12V/15V ISOLATED DC-DC CONVERTER


Revised 5/15/98

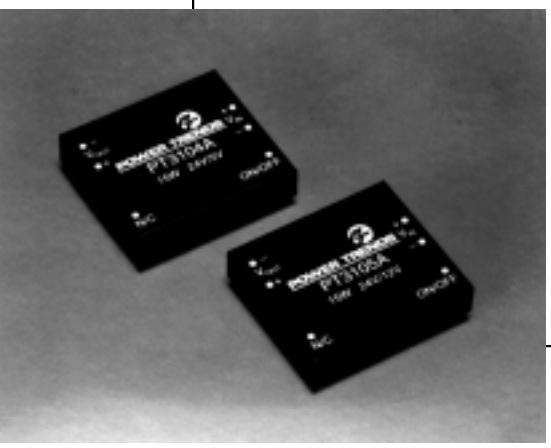

- Power Density 15 Watts/in³
- Wide Input Voltage Range 18V to 40V
- 81% Efficiency
- 500 VDC Isolation
- Small Footprint
- No External Components Required

Power Trends' PT3104A (5V), PT3105A (12V) and PT3106A (15V) Isolated DC-DC Converters advance the state-of-the-art for board-mounted converters by employing high switching frequencies greater than 650 KHz and planar magnetics and surface-mount construction. They feature the industry's smallest footprint, a power density of 15 Watts/in³, and operate at 80% efficiency. They are designed for Telecom, Industrial, Computer, Medical, and other distributed power applications requiring input-to-output isolation.

Standard Application



Specifications

Characteristics (T_a=25°C unless noted)	Symbols	Conditions	PT3100 SERIES Min	Typ	Max	Units
Output Current	I_o	Over V_{in} range, V_o = 5V	0	—	3.0	A
		V_o = 12V	0	—	1.25	A
		V_o = 15V	0	—	1.0	A
Current Limit	I_{cl}	V_{in} = 18V, V_o = 5V	—	4.0	—	A
		V_o = 12V	—	1.75	—	A
		V_o = 15V	—	1.4	—	A
On/Off Standby Current	$I_{in\ standby}$	V_{in} = 24V, Pin 1 = -V_{in}	—	7	10	mA
Short Circuit Current	I_{sc}	V_{in} = 24V, V_o = 5V	—	6.25	—	A
		V_o = 12V	—	2.5	—	A
		V_o = 15V	—	2.0	—	A
Inrush Current	I_{ir}	V_{in} = 24V @ max I_o	—	1.0	2.0	A
	t_{ir}	On start-up	—	1.0	5.0	mSec
Input Voltage Range	V_{in}	I_o = 0.1 to max I_o	18.0	24.0	40.0	V
Output Voltage Tolerance	ΔV_o	Over V_{in} Range T_A= -20°C to +70°C	—	±1.0	±2.0	%V_o
Ripple Rejection	RR	Over V_{in} range @ 120 Hz	—	60	—	dB
Line Regulation	Reg_{line}	Over V_{in} range @ max I_o	—	±0.2	±1.0	%V_o
Load Regulation	Reg_{load}	10% to 100% of I_o max	—	±0.4	±1.0	%V_o
V_o Ripple/Noise	V_n	V_{in}=24V, I_o=3.0A, V_o=5V	—	75	100	mV_{pp}
		V_{in}=24V, I_o=1.25A, V_o=12V	—	75	150	mV_{pp}
		V_{in}=24V, I_o=1.25A, V_o=15V	—	100	200	mV_{pp}
Transient Response	t_{tr}	50% load change	—	125	200	µSec
		V_o over/undershoot	—	3.0	5.0	%V_o
Efficiency	η	V_{in}=24V, I_o=3.0A, V_o=5V	—	80	—	%
		V_{in}=24V, I_o=1.25A, V_o=12V	—	80	—	%
		V_{in}=24V, I_o=1A, V_o=15V	—	81	—	%
Switching Frequency	f_o	Over V_{in} and I_o, V_o=5V	800	850	900	kHz
		V_o=12V/15V	600	650	700	kHz
Recommended Operating Temperature Range	T_a	V_{in} = 24V @ max I_o Free air convection, (40-60LFM)	-20	—	+70*	°C
Thermal Resistance	θ_{ja}	Free Air Convection, (40-60LFM)	—	14	—	°C/W
Case Temperature	T_c	@ Thermal shutdown	—	—	100	°C
Storage Temperature	T_s		-40	—	110	°C
Mechanical Shock	—	Per Mil-STD-202F, Method 213B, 6mS, Half-sine, mounted to a PCB	—	50	—	G's
Mechanical Vibration	—	Per Mil-STD-202F, Method 204D, 10-500Hz, Soldered in a PCB	—	10	—	G's
Weight	—	—	—	28	—	grams
Isolation	—	—	500	—	—	V
Capacitance	—	—	—	1100	—	pF
Resistance	—	—	10	—	—	MΩ
Flammability	—	Materials meet UL 94V-0				
Remote On/Off	On	Open or 2.5 to 7.0 VDC above -V_{in}				
	Off	Short or 0 to 0.8 VDC above -V_{in}				

* See Thermal Derating Curves

Pin-Out Information

Pin	Function
1	Remote ON/OFF
2	-V_{in}
3	+V_{in}
4	-V_{out}
5	+V_{out}
6	Do not connect

Ordering Information

Through-Hole

PT3104A = 5 Volts
PT3105A = 12 Volts
PT3106A = 15 Volts

Surface Mount


PT3104C = 5 Volts
PT3105C = 12 Volts
PT3106C = 15 Volts

(For dimensions and PC board layout, see Package Style 700.)


PT3104, 5.0 VDC

(See Note 1)

Efficiency vs Output Current

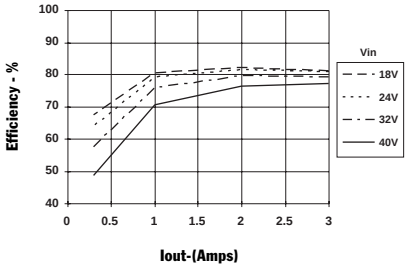


Ripple vs Output Current

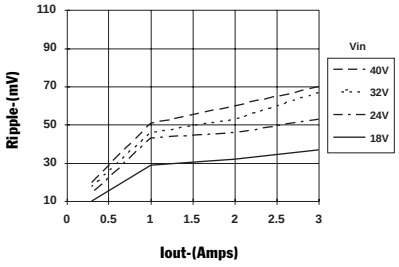


Thermal Derating (T_a)

(See Note 2)

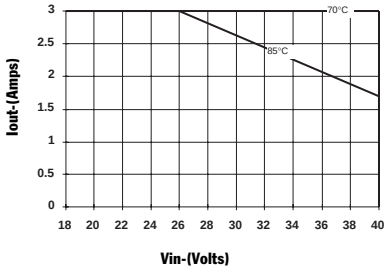


Power Dissipation vs Output Current

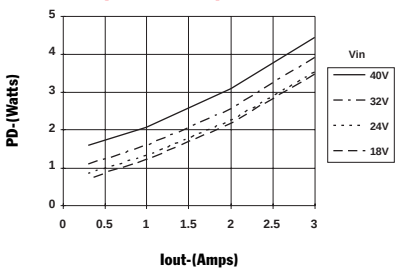


PT3105, 12.0 VDC

(See Note 1)

Efficiency vs Output Current

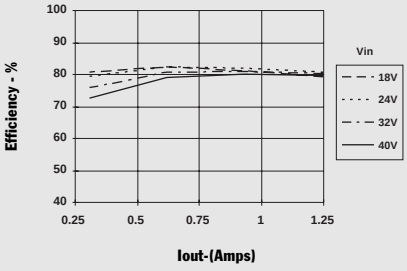


Ripple vs Output Current

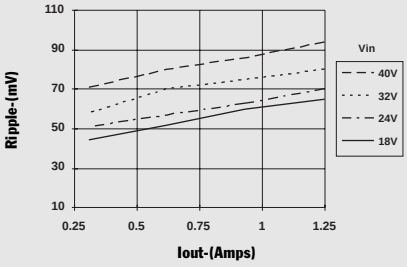


Thermal Derating (T_a)

(See Note 2)

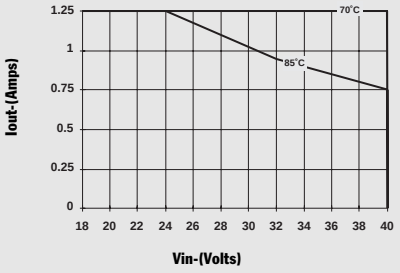


Power Dissipation vs Output Current

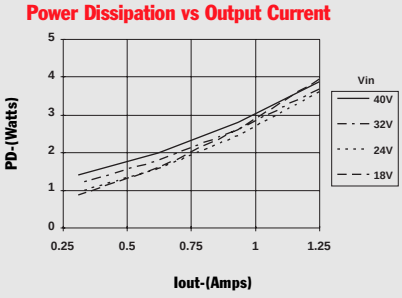


PT3106, 15.0 VDC

(See Note 1)

Efficiency vs Output Current

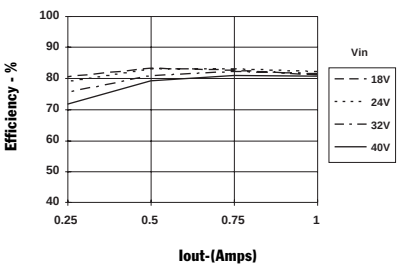


Ripple vs Output Current

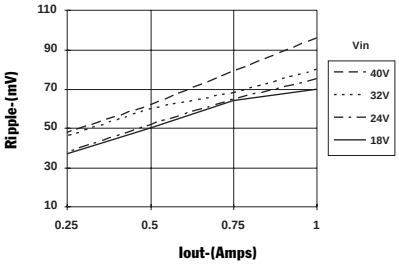


Thermal Derating (T_a)

(See Note 2)

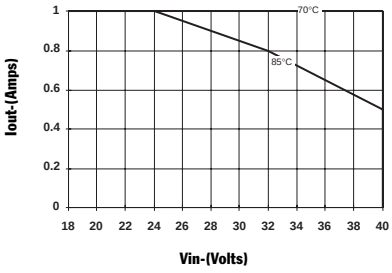

Power Dissipation vs Output Current

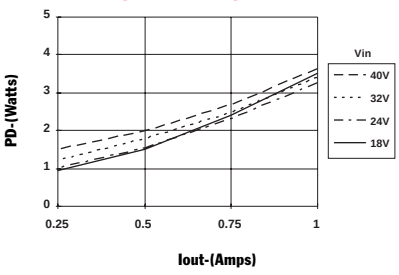

Note 1: *All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the DC-DC Converters.*
Note 2: *Thermal derating graphs are developed in free air convection cooling of 40-60 LFM.*

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 1999, Texas Instruments Incorporated