

CONFIDENTIAL & PROPRIETARY INFORMATION
This document contains Confidential and Proprietary Information of Alliance LLC, and all design, manufacturing, reproduction, use, and sale rights of such information are expressly reserved

ALL DIMENSIONS ARE IN MM



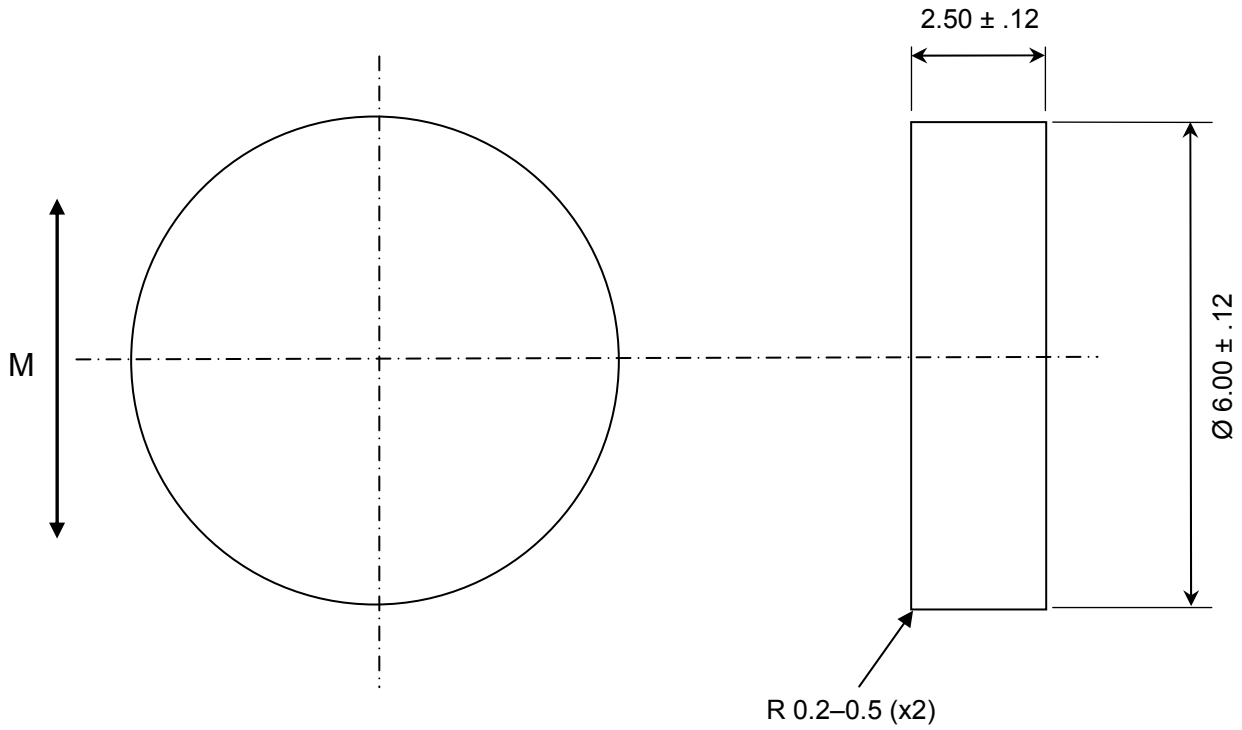

NOTES:

1. MAGNET PROPERTIES PER N-35SH:
   Br: 11,800-12,200 G
   Hc: 10,800-11,500 Oe
   Hci: ≥20,000 Oe
   T max: 150 C

2. SUPPLIED MAGNETIZED ACROSS THE DIAMETER

3. PARTS ARE PASSIVATED (NO PLATING)

REACH COMPLIANT

REV	DESCRIPTION	DATE	BY
B	Changed CAD, incl cert, 3D	1/25/14	BT

TOLERANCES
(UNLESS OTHERWISE NOTED)

DECIMAL
X.XX = ± .01
X.XXX= ± .005

METRIC
X.X = ± .25
X.XX= ± .13

ANGLES
± .5°

DO NOT SCALE DRAWING

Alliance LLC
1450 CLARK DRIVE, VALPARAISO, INDIANA 46385

DESCRIPTION: 6.0 mm x 2.5 mm DISC MAGNET

AMS P/N: AS5000-MD6SH		**P/N: 072509AMS**
GRADE: N-35SH	Drwg by: BT	REV LEVEL: B
COAT: PASSIVATED	Appr by: DV	Appr. Dated: 07-25-2013