
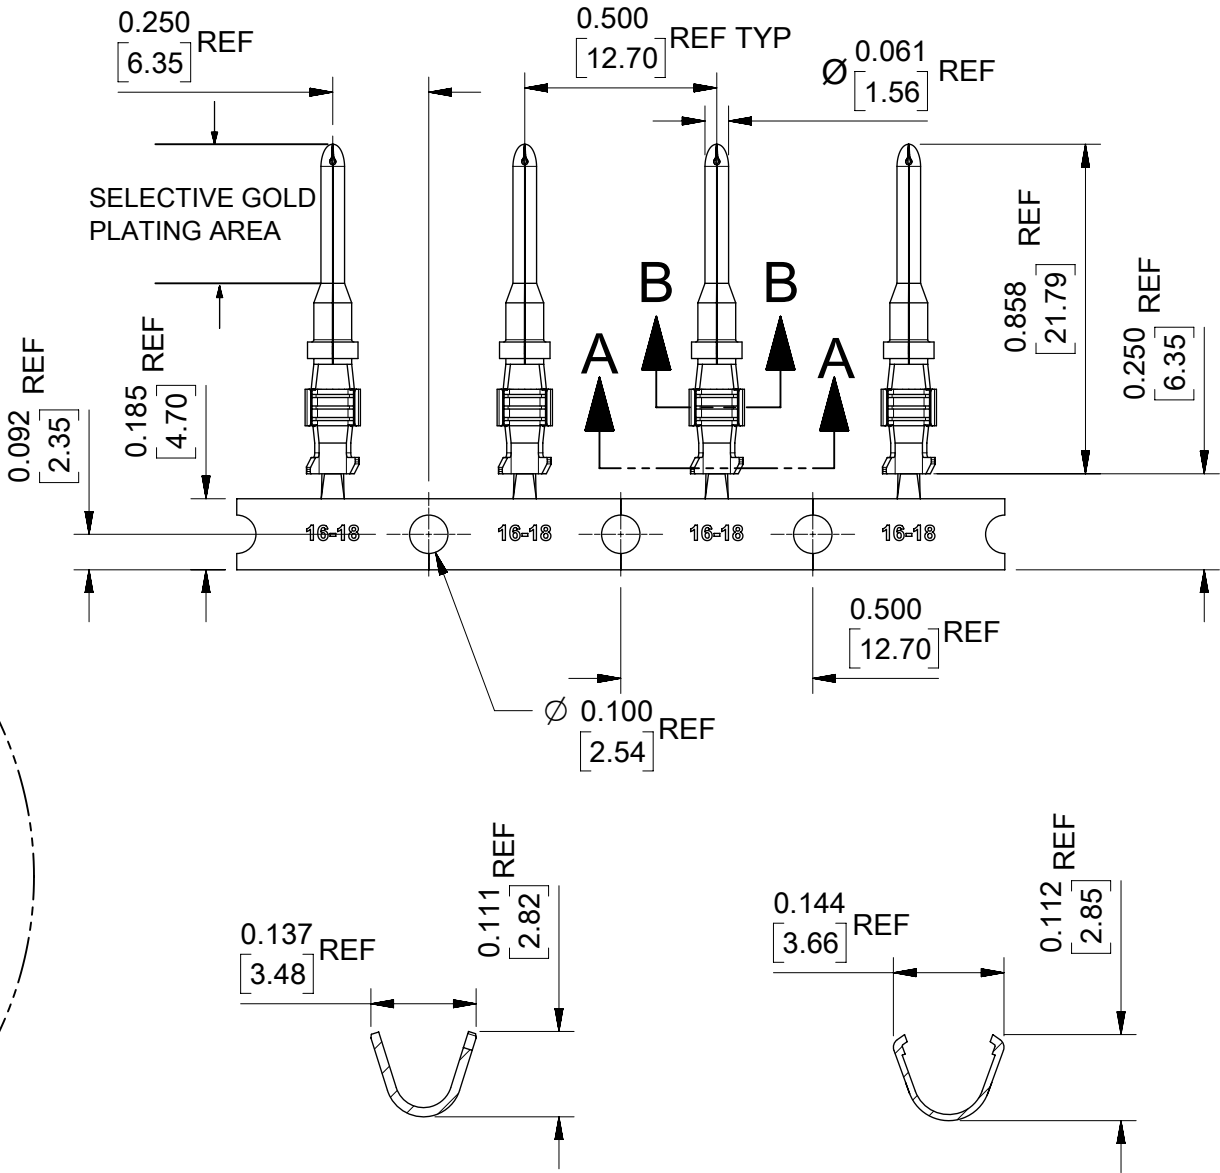


STRIP MATERIAL NUMBER	FINISH
84524-0004	OVERALL NICKEL 80µ" MINIMUM
84524-0014	SELECTIVE HARD GOLD 30µ" MINIMUM OVER NICKEL 50µ" MINIMUM ALL OVER

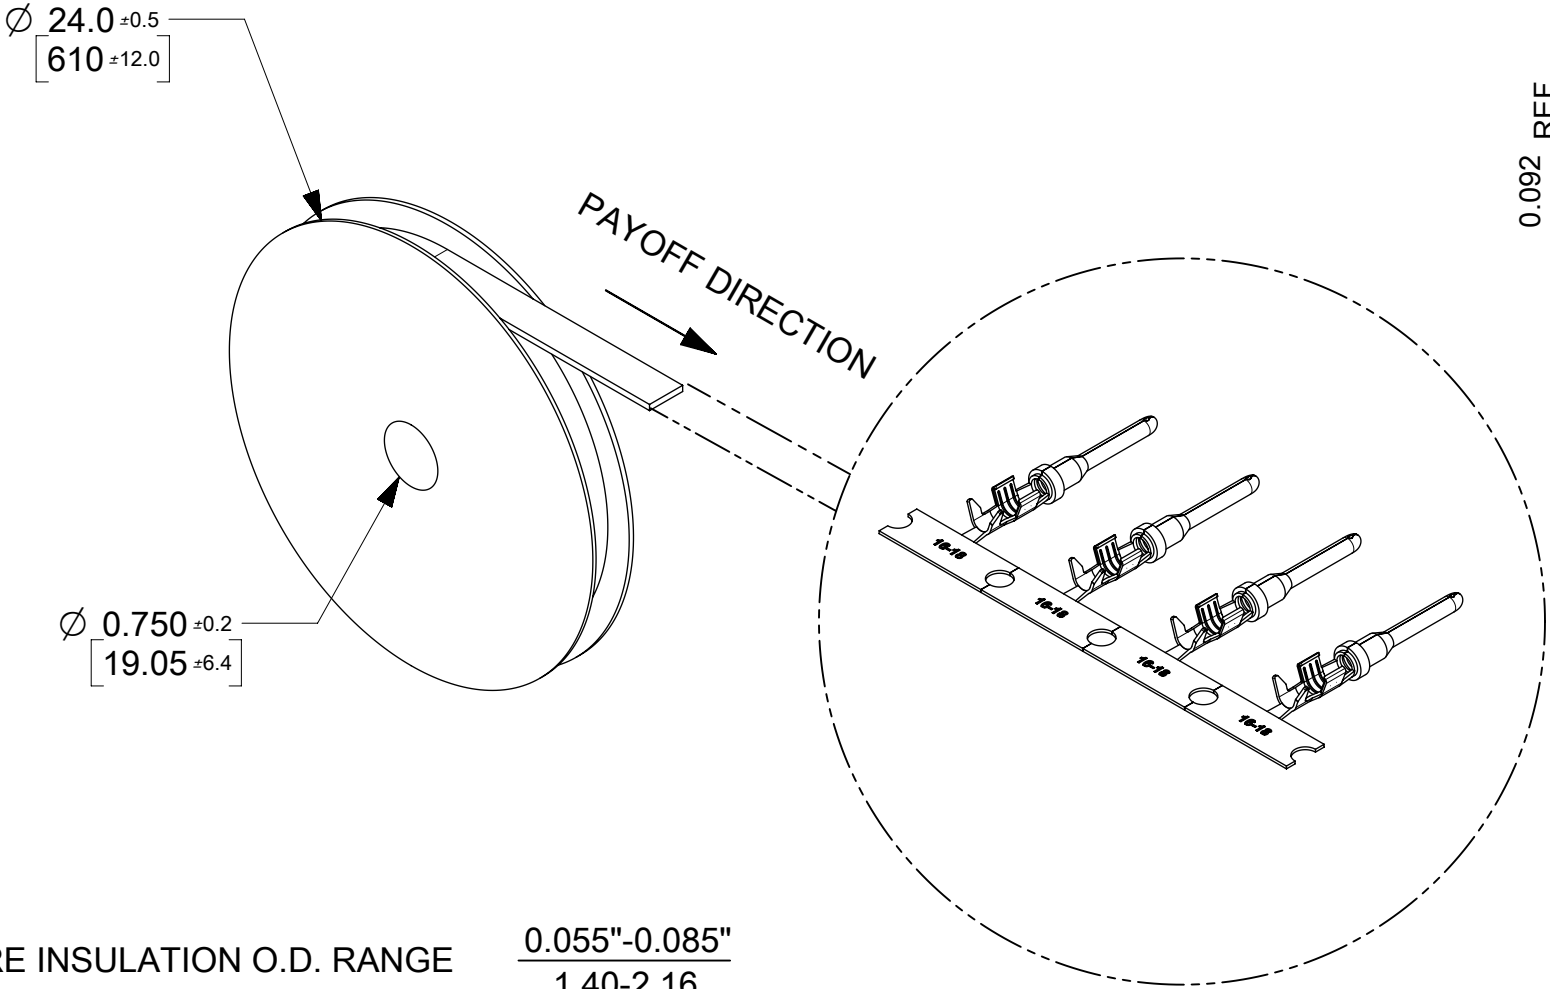

SECTION A-A
INSULATION CRIMP

SECTION B-B
CONDUCTOR CRIMP

- NOTES:
1. MATERIAL: COPPER ALLOY .0118/0.300 THICK.
 2. FINISH: SEE CHART.
 3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
 4. TERMINAL FOR USE ON XRC & ML-XT CONNECTOR ASSEMBLIES.
 5. TERMINALS COMPLY WITH SECTION 5.3.2 OF THE SAE J1939-11 STANDARD FOR SURFACE VEHICLE RECOMMENDED PRACTICE.

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
 = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED PIN TIP					molex							
	INCH/[mm]		2:1														
 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 168799 DRWN: JFLETCHER 2017/11/21 CHK'D: JDWALLACE 2018/02/12 APPR: JDWALLACE 2018/02/20					XRC PIN TERMINAL 16-18AWG 0.055"-0.085" WIRE Ø							
 = 0																	
 = 0	ANGULAR TOL ± 2.0 °									PRODUCT CUSTOMER DRAWING							
 = 0	4 PLACES ±																
 = 0	3 PLACES ±				INITIAL REVISION: DRWN: JFLETCHER 2016/01/25 APPR: JALEXANDER 2016/02/23					DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
 = 0	2 PLACES ± 0.13									845240010		PSD		000		B	
 = 0	1 PLACE ± 0.2				THIRD ANGLE PROJECTION					MATERIAL NUMBER		CUSTOMER		SHEET NUMBER			
 = 0	0 PLACES ±									SEE CHART		GENERAL MARKET		1 OF 1			
 = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						DRAWING		SERIES								
= 0							A3-SIZE		84524								