HAND FLEX™

Coaxial Cable

086-6KM+

50Ω 6 inch DC to 40 GHz 2.92 mm Male

THE BIG DEAL

- Wideband frequency coverage, DC to 40 GHz
- Low Insertion Loss, 0.6 dB Typ. to 40 GHz
- Excellent Return Loss, 31 dB Typ. to 40 GHz
- Hand formable to almost any custom shape without special bending tools
- 6 mm bend radius for tight installations
- Anti-torque nut prevents cable stress during installation
- Insulated outer jacket standard
- Connector interface, meets MIL-STD-348
- Ideal for interconnect of assembled systems



Generic photo used for illustration purposes only

Model No.	086-6KM+
Case Style	RQ2535-6
Connectors	2.92 mm Male

+RoHS Compliant
The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Replacement for custom bent 0.086" semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace systems
- Environmental and test chambers

PRODUCT OVERVIEW

The 086 Series Hand-Flex™ Coaxial Cables are ideal for interconnection of coaxial components or sub-systems. The construction includes a silver plated solid copper conductor which maintains the shape after bending. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have passivated stainless-steel coupling nut over a gold plated brass connector body.

KEY FEATURES

Feature	Advantages
Hand-Formable RF Cables	The 086 Series Hand-Flex™ cables are hand formable making them ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies.
Tight Bend Radius	Capable of only 6 mm bend radius, the 086 Hand Flex series is able to make connections in tight spaces making these cables ideal for dense system integration
Excellent Return Loss	Supporting excellent return loss to 18 GHz, the 086 Series Hand-Flex™ Cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors.
Good Power Handling Capability: • 61 W at 1 GHz • 7 W at 40 GHz	Mini-Circuits 086 Series Hand Flex cables can support medium to high RF power levels enabling these cables to be used in the transmit path. NOTE: power rating is at sea-level altitudes.
Built-In Anti-Torque Nut	Mini-Circuits 086 Series Hand Flex cables include an anti-torque feature to support the connector body during installation alleviating risk of stress to the connector/cable interface.

REV. C
ECO-025254
086-6KM+
MCL NY
260414

ELECTRICAL SPECIFICATIONS AT +25 °C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		40	GHz
Length[1]			6		inches
Insertion Loss	DC–6		0.22	0.54	dB
	6–18		0.44	0.99	
	18–26.5		0.65	1.21	
	26.5–40		0.89	1.59	
Return Loss	DC–18	18	33		dB
	18–40	15.9	31		

1. Custom sizes available, consult factory.

ABSOLUTE MAXIMUM RATINGS[2]

Parameter	Ratings
Operating Temperature	-55 °C to +85 °C
Storage Temperature	-55 °C to +85 °C
Power Handling at +25°C, Sea Level	61 W at 1 GHz 24 W at 6 GHz 16 W at 12 GHz 12 W at 18 GHz 9 W at 26.5 GHz 7 W at 40 GHz

2. Permanent damage may occur if any of these limits are exceeded.


HAND FLEX™

Coaxial Cable

086-6KM+


50Ω 6 inch DC to 40 GHz 2.92 mm Male

CABLE CONSTRUCTION

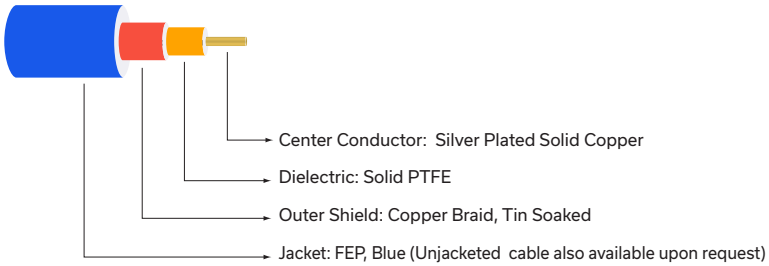

Connectors: Coupling Nut: Stainless Steel, Passivated
Body: Brass, Gold Plated
Center Pin: Beryllium Copper, Gold Plated

OUTLINE DRAWING

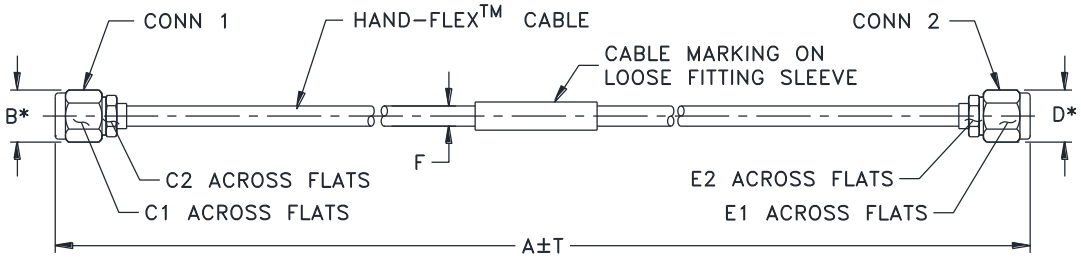

* OVERALL CONNECTOR OR CABLE & BOOT DIM.
[CONNECTOR SHAPE MAY VARY]

OUTLINE DIMENSIONS (Inch / mm)

A	B	C1	C2	D	E1	E2	F	T	wt
6.0	.36	.315	.250	.36	.315	.250	.104	.08	grams
152.40	9.14	8.00	6.35	9.14	8.00	6.35	2.64	2.03	11.28

HAND FLEX™

Coaxial Cable


086-6KM+

50Ω 6 inch DC to 40 GHz 2.92 mm Male

TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	
		2.92 mm Male	2.92 mm Male
10	0.03	53.4	49.1
2000	0.19	49.2	48.9
4000	0.26	36.7	36.1
6000	0.32	27.7	27.8
10000	0.40	28.7	28.9
15000	0.49	36.1	37.6
18000	0.55	32.2	32.7
20000	0.60	34.5	36.3
26500	0.75	33.5	32.5
28000	0.79	36.1	34.4
30000	0.82	33.8	35.4
32000	0.86	35.3	36.6
36000	0.95	31.2	33.3
38000	1.01	29.4	30.4
40000	1.05	29.3	29.6



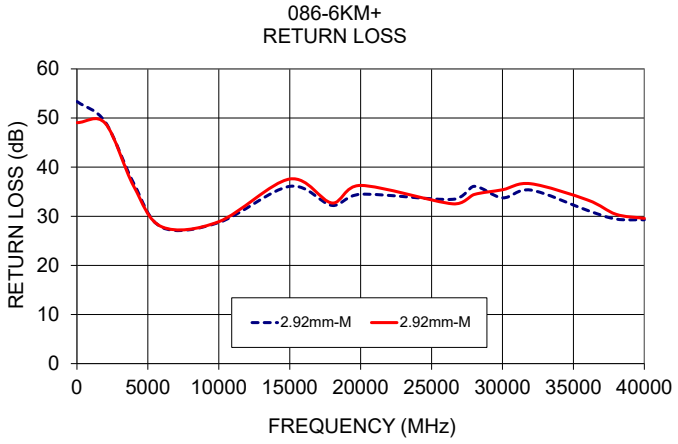


PROPER CABLE CONNECTION USING ANTI-TORQUE NUT

Mini-Circuits 086-series HandFlex™ interconnect cables are constructed with an anti-torque nut adjacent to the connector coupling nut. When used properly, this feature prevents possible damage to the cable due to torquing and twisting when tightening the cable connector.


TO PROPERLY TIGHTEN THE CABLE CONNECTOR:

1) The cable connector includes a coupling nut which rotates to fasten the connector, and an anti-torque nut, which is fixed to prevent the cable from twisting during connection.

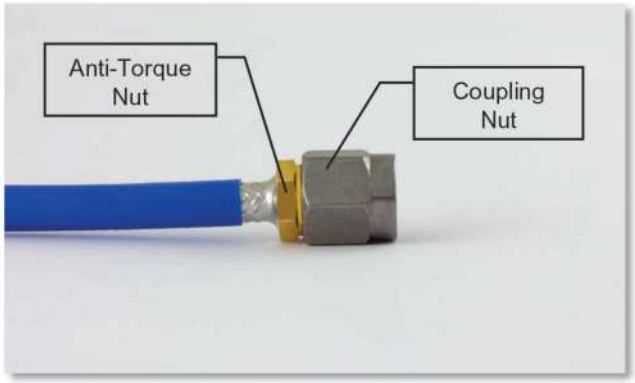

2) To properly tighten the cable, use a standard 1/4-inch open end wrench to brace the anti-torque nut.

3) Using a 5/16-inch open end wrench, rotate the coupling nut clockwise to tighten the cable connector.

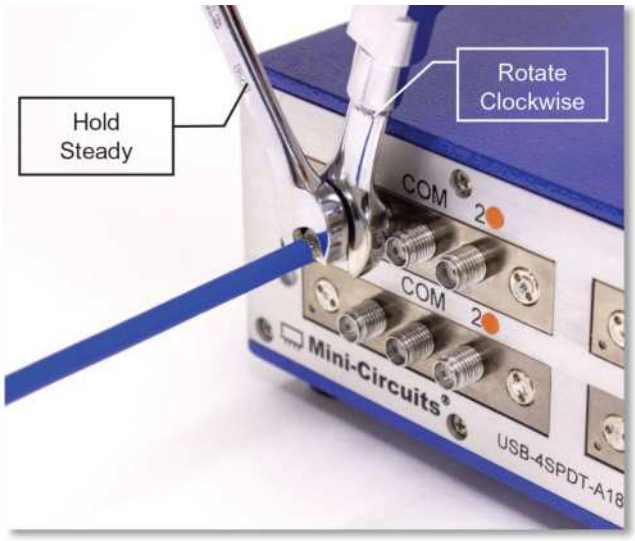

*NOTE: Mini-Circuits recommends using a 5/16-inch open end wrench calibrated to 8 inch-pounds maximum torque to prevent damage due to over-torqueing the connector.

NOTES
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html