

Raspberry Pi Compute Module 3+ Datasheet

Compute Module 3+ and Compute Module 3+ Lite

Colophon

© 2022-2026 Raspberry Pi Ltd

This documentation is licensed under a Creative Commons Attribution-NoDerivatives 4.0 International (CC BY-ND).

Release	2
Build date	30/06/2026

Legal disclaimer notice

TECHNICAL AND RELIABILITY DATA FOR RASPBERRY PI PRODUCTS (INCLUDING DATASHEETS) AS MODIFIED FROM TIME TO TIME ("RESOURCES") ARE PROVIDED BY RASPBERRY PI LTD ("RPL") "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW IN NO EVENT SHALL RPL BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THE RESOURCES, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

RPL reserves the right to make any enhancements, improvements, corrections or any other modifications to the RESOURCES or any products described in them at any time and without further notice.

The RESOURCES are intended for skilled users with suitable levels of design knowledge. Users are solely responsible for their selection and use of the RESOURCES and any application of the products described in them. User agrees to indemnify and hold RPL harmless against all liabilities, costs, damages or other losses arising out of their use of the RESOURCES.

RPL grants users permission to use the RESOURCES solely in conjunction with the Raspberry Pi products. All other use of the RESOURCES is prohibited. No licence is granted to any other RPL or other third party intellectual property right.

HIGH RISK ACTIVITIES. Raspberry Pi products are not designed, manufactured or intended for use in hazardous environments requiring fail safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, weapons systems or safety-critical applications (including life support systems and other medical devices), in which the failure of the products could lead directly to death, personal injury or severe physical or environmental damage ("High Risk Activities"). RPL specifically disclaims any express or implied warranty of fitness for High Risk Activities and accepts no liability for use or inclusions of Raspberry Pi products in High Risk Activities.

Raspberry Pi products are provided subject to RPL's Standard Terms. RPL's provision of the RESOURCES does not expand or otherwise modify RPL's Standard Terms including but not limited to the disclaimers and warranties expressed in them.

Table of Contents

1. Introduction . . . 3
2. Features . . . 4
    2.1. Hardware . . . 4
    2.2. Peripherals . . . 4
    2.3. Software . . . 4
3. Block Diagram . . . 5
4. Mechanical Specification . . . 6
5. Pin Assignments . . . 7
6. Electrical Specification . . . 10
7. Power Supplies . . . 12
    7.1. Supply Sequencing . . . 12
    7.2. Power Requirements . . . 12
8. Booting . . . 14
9. Peripherals . . . 15
    9.1. GPIO . . . 15
        9.1.1. GPIO Alternate Functions . . . 15
        9.1.2. Secondary Memory Interface (SMI) . . . 17
        9.1.3. Display Parallel Interface (DPI) . . . 17
        9.1.4. SD/SDIO Interface . . . 17
    9.2. CSI (MIPI Serial Camera) . . . 17
    9.3. DSI (MIPI Serial Display) . . . 17
    9.4. USB . . . 17
    9.5. HDMI . . . 17
    9.6. Composite (TV Out) . . . 18
10. Thermals . . . 19
    10.1. Temperature Range . . . 19
11. Availability . . . 20
12. Support . . . 21

1. Introduction

The Raspberry Pi Compute Module 3+ (CM3+) is a range of DDR2-SODIMM-mechanically-compatible System on Modules (SoMs) containing processor, memory, eMMC Flash (on non-Lite variants) and supporting power circuitry. These modules allow a designer to leverage the Raspberry Pi hardware and software stack in their own custom systems and form factors. In addition these modules have extra IO interfaces over and above what is available on the Raspberry Pi model A/B boards, opening up more options for the designer.

CM3+ contains a BCM2837B0 processor (as used on the Raspberry Pi 3B+), 1 Gbyte LPDDR2 RAM, and eMMC Flash. CM3+ is currently available in five variants: 8 GB, 16 GB, 32 GB, 64 GB, and CM3+ Lite (0 GB), which have 8, 16, 32, and 64 gigabytes of eMMC Flash, or no eMMC Flash, respectively.

The CM3+ Lite product is the same as CM3+ except the eMMC Flash is not fitted, and the SD/eMMC interface pins are available for the user to connect their own SD/eMMC device.

Note that the CM3+ is electrically identical and, with the exception of higher CPU z-height, physically identical to the legacy CM3 products.

CM3+ modules require a software/firmware image dated November 2018 or newer to function correctly.

2. Features

2.1. Hardware

- Low cost
- Low power
- High availability
- High reliability
  - Tested over millions of Raspberry Pi devices produced to date
  - Module IO pins have 15 micro-inch hard gold plating over 2.5 micron Nickel

2.2. Peripherals


- 48x GPIO
- 2x I2C
- 2x SPI
- 2x UART
- 2x SD/SDIO
- 1x HDMI 1.3a
- 1x USB2 HOST/OTG
- 1x DPI (Parallel RGB Display)
- 1x NAND interface (SMI)
- 1x 4-lane CSI Camera Interface (up to 1 Gbps per lane)
- 1x 2-lane CSI Camera Interface (up to 1 Gbps per lane)
- 1x 4-lane DSI Display Interface (up to 1 Gbps per lane)
- 1x 2-lane DSI Display Interface (up to 1 Gbps per lane)

2.3. Software

- Armv8 Instruction Set
- Mature and stable Linux software stack
  - Latest Linux Kernel support
  - Many drivers upstreamed
  - Stable and well supported userland
  - Full availability of GPU functions using standard APIs

3. Block Diagram

Figure 1.
CM3+ Block Diagram

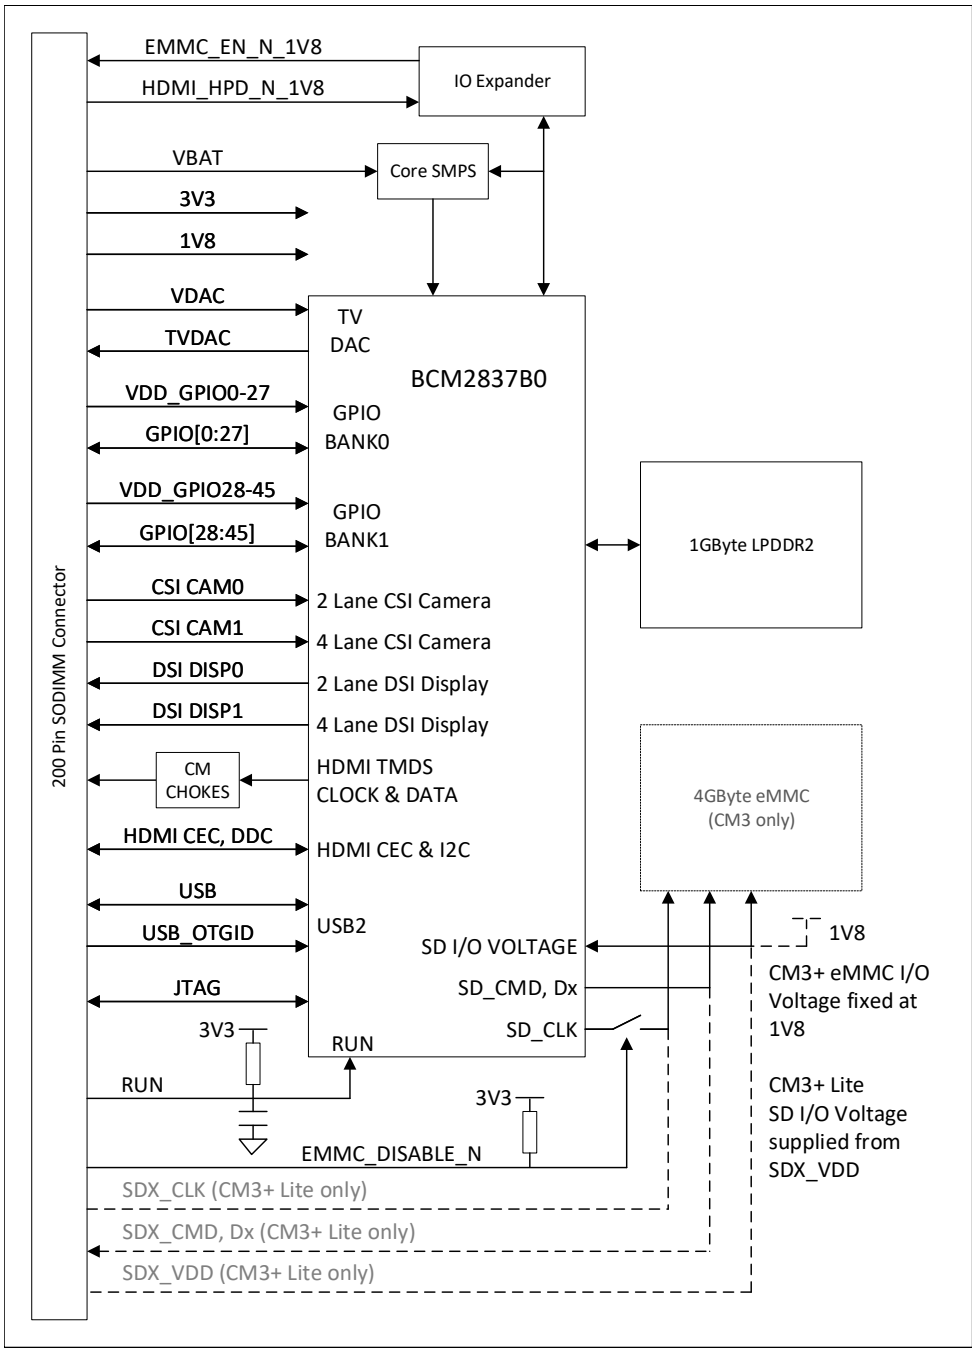

4. Mechanical Specification

The CM3+ modules conform to JEDEC MO-224 mechanical specification for 200 pin DDR2 (1.8 V) SODIMM modules and therefore should work with the many DDR2 SODIMM sockets available on the market. **(Please note that the pinout of the Compute Module is not the same as a DDR2 SODIMM module; they are not electrically compatible.)**

The SODIMM form factor was chosen as a way to provide the 200 pin connections using a standard, readily available and low cost connector compatible with low cost PCB manufacture.

The maximum component height on the underside of the Compute Module is 1.2 mm.


The maximum component height on the top side of the Compute Module is 2.5 mm.

The Compute Module PCB thickness is 1.0 mm +/- 0.1 mm.

Note that the location and arrangement of components on the Compute Module may change slightly over time due to revisions for cost and manufacturing considerations; however, maximum component heights and PCB thickness will be kept as specified.

Figure 2 gives the CM3+ mechanical dimensions.

Figure 2.
CM3+ Mechanical Dimensions

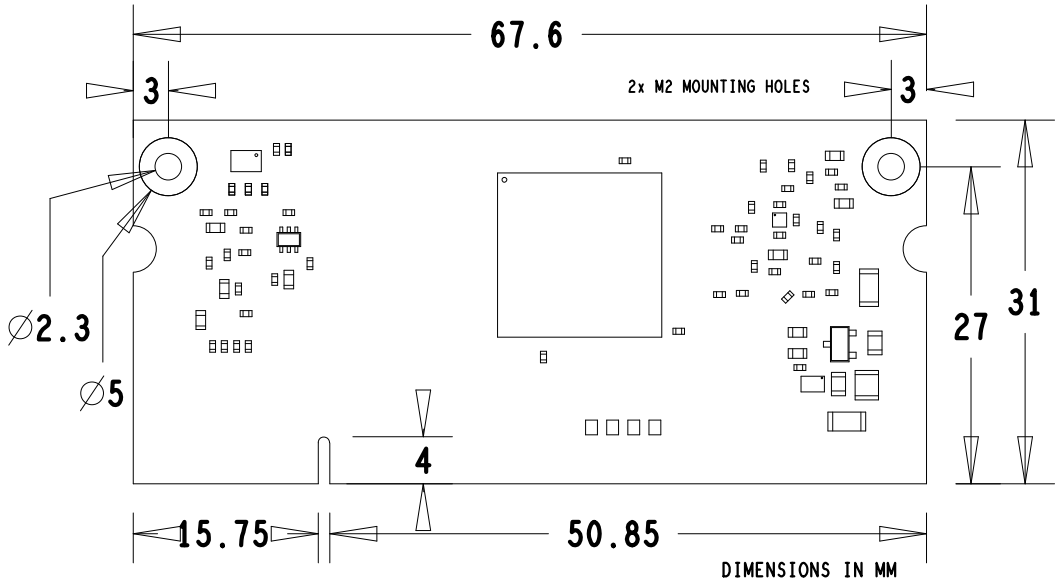

5. Pin Assignments

Figure 3.

Compute Module 3+ SODIMM Connector Pinout

CM3+	CM3+ Lite	PIN		PIN	CM3+	CM3+ Lite
GND		1		2	EMMC_DISABLE_N	
GPIO0		3		4	NC	SDX_VDD
GPIO1		5		6	NC	SDX_VDD
GND		7		8	GND	
GPIO2		9		10	NC	SDX_CLK
GPIO3		11		12	NC	SDX_CMD
GND		13		14	GND	
GPIO4		15		16	NC	SDX_D0
GPIO5		17		18	NC	SDX_D1
GND		19		20	GND	
GPIO6		21		22	NC	SDX_D2
GPIO7		23		24	NC	SDX_D3
GND		25		26	GND	
GPIO8		27		28	GPIO28	
GPIO9		29		30	GPIO29	
GND		31		32	GND	
GPIO10		33		34	GPIO30	
GPIO11		35		36	GPIO31	
GND		37		38	GND	
GPIO0-27_VDD		39		40	GPIO0-27_VDD	
			KEY			
GPIO28-45_VDD		41		42	GPIO28-45_VDD	
GND		43		44	GND	
GPIO12		45		46	GPIO32	
GPIO13		47		48	GPIO33	
GND		49		50	GND	
GPIO14		51		52	GPIO34	
GPIO15		53		54	GPIO35	
GND		55		56	GND	
GPIO16		57		58	GPIO36	
GPIO17		59		60	GPIO37	
GND		61		62	GND	
GPIO18		63		64	GPIO38	
GPIO19		65		66	GPIO39	
GND		67		68	GND	
GPIO20		69		70	GPIO40	
GPIO21		71		72	GPIO41	
GND		73		74	GND	
GPIO22		75		76	GPIO42	
GPIO23		77		78	GPIO43	
GND		79		80	GND	
GPIO24		81		82	GPIO44	
GPIO25		83		84	GPIO45	
GND		85		86	GND	
GPIO26		87		88	HDMI_HPD_N_1V8	
GPIO27		89		90	EMMC_EN_N_1V8	
GND		91		92	GND	
DSI0_DN1		93		94	DSI1_DP0	
DSI0_DP1		95		96	DSI1_DN0	
GND		97		98	GND	
DSI0_DN0		99		100	DSI1_CP	
DSI0_DP0		101		102	DSI1_CN	
GND		103		104	GND	
DSI0_CN		105		106	DSI1_DP3	
DSI0_CP		107		108	DSI1_DN3	
GND		109		110	GND	
HDMI_CLK_N		111		112	DSI1_DP2	
HDMI_CLK_P		113		114	DSI1_DN2	
GND		115		116	GND	
HDMI_D0_N		117		118	DSI1_DP1	
HDMI_D0_P		119		120	DSI1_DN1	
GND		121		122	GND	
HDMI_D1_N		123		124	NC	
HDMI_D1_P		125		126	NC	
GND		127		128	NC	
HDMI_D2_N		129		130	NC	
HDMI_D2_P		131		132	NC	
GND		133		134	GND	
CAM1_DP3		135		136	CAM0_DP0	
CAM1_DN3		137		138	CAM0_DN0	
GND		139		140	GND	
CAM1_DP2		141		142	CAM0_CP	
CAM1_DN2		143		144	CAM0_CN	
GND		145		146	GND	
CAM1_CP		147		148	CAM0_DP1	
CAM1_CN		149		150	CAM0_DN1	
GND		151		152	GND	
CAM1_DP1		153		154	NC	
CAM1_DN1		155		156	NC	
GND		157		158	NC	
CAM1_DP0		159		160	NC	
CAM1_DN0		161		162	NC	
GND		163		164	GND	
USB_DP		165		166	TVDAC	
USB_DM		167		168	USB_OTGID	
GND		169		170	GND	
HDMI_CEC		171		172	VC_TRST_N	
HDMI_SDA		173		174	VC_TDI	
HDMI_SCL		175		176	VC_TMS	
RUN		177		178	VC_TDO	
DD_CORE (DO NOT CONNECT		179		180	VC_TCK	
GND		181		182	GND	
1V8		183		184	1V8	
1V8		185		186	1V8	
GND		187		188	GND	
VDAC		189		190	VDAC	
3V3		191		192	3V3	
3V3		193		194	3V3	
GND		195		196	GND	
VBAT		197		198	VBAT	
VBAT		199		200	VBAT	

Figure 3 gives the Compute Module 3+ pinout and Table 1 gives the pin functions.

Table 1.

Pin Functions

Pin Name	DIR	Voltage Ref	PDN[a] State	If Unused	Description/Notes
RUN and Boot Control (see text for usage guide)					
RUN	I	3V3[b]	Pull High	Leave open	Has internal 10k pull up
EMMC_DISABLE_N	I	3V3[b]	Pull High	Leave open	Has internal 10k pull up
EMMC_EN_N_1V8	O	1V8	Pull High	Leave open	Has internal 2k2 pull up
GPIO					
GPIO[27:0]	I/O	GPIO0-27_VDD	Pull or Hi-Z[c]	Leave open	GPIO Bank 0
GPIO[45:28]	I/O	GPIO28-45_VDD	Pull or Hi-Z[c]	Leave open	GPIO Bank 1
Primary SD Interface[d,e]					
SDX_CLK	O	SDX_VDD	Pull High	Leave open	Primary SD interface CLK
SDX_CMD	I/O	SDX_VDD	Pull High	Leave open	Primary SD interface CMD
SDX_Dx	I/O	SDX_VDD	Pull High	Leave open	Primary SD interface DATA
USB Interface					
USB_Dx	I/O	-	Z	Leave open	Serial interface
USB_OTGID	I	3V3		Tie to GND	OTG pin detect
HDMI Interface					
HDMI_SCL	I/O	3V3[b]	Z[f]	1K8 pull to 3V3	DDC Clock (5.5V tolerant)
HDMI_SDA	I/O	3V3[b]	Z[f]	1K8 pull to 3V3	DDC Data (5.5V tolerant)
HDMI_CEC	I/O	3V3	Z	Leave open	CEC (has internal 27k pull up)
HDMI_CLKx	O	-	Z	Leave open	HDMI serial clock
HDMI_Dx	O	-	Z	Leave open	HDMI serial data
HDMI_HPD_N_1V8	I	1V8	Pull High	Leave open	HDMI hotplug detect
CAM0 (CSI0) 2-lane Interface					
CAM0_Cx	I	-	Z	Leave open	Serial clock
CAM0_Dx	I	-	Z	Leave open	Serial data
CAM1 (CSI1) 4-lane Interface					
CAM1_Cx	I	-	Z	Leave open	Serial clock
CAM1_Dx	I	-	Z	Leave open	Serial data
DSI0 (Display 0) 2-lane Interface					
DSI0_Cx	O	-	Z	Leave open	Serial clock
DSI0_Dx	O	-	Z	Leave open	Serial data
DSI1 (Display 1) 4-lane Interface					
DSI1_Cx	O	-	Z	Leave open	Serial clock
DSI1_Dx	O	-	Z	Leave open	Serial data
TV Out					
TVDAC	O	-	Z	Leave open	Composite video DAC output
JTAG Interface					
TMS	I	3V3	Z	Leave open	Has internal 50k pull up
TRST_N	I	3V3	Z	Leave open	Has internal 50k pull up
TCK	I	3V3	Z	Leave open	Has internal 50k pull up
TDI	I	3V3	Z	Leave open	Has internal 50k pull up
TDO	O	3V3	O	Leave open	Has internal 50k pull up

- [a] The PDN column indicates power-down state (when RUN pin LOW)
- [b] Must be driven by an open-collector driver
- [c] GPIO have software enabled pulls which keep state over power-down
- [d] Only available on Lite variants
- [e] The CM will always try to boot from this interface first
- [f] Requires external pull-up resistor to 5 V as per HDMI spec

6. Electrical Specification

Caution

Stresses above those listed in Table 2 may cause permanent damage to the device. This is a stress rating only; functional operation of the device under these or any other conditions above those listed in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Table 2.

Absolute maximum ratings

Symbol	Parameter	Minimum	Maximum	Unit
VBAT	Core SMPS Supply	−0.5	6.0	V
3V3	3V3 Supply Voltage	−0.5	4.10	V
1V8	1V8 Supply Voltage	−0.5	2.10	V
VDAC	TV DAC Supply	−0.5	4.10	V
GPIO0-27_VDD	GPIO0-27 I/O Supply Voltage	−0.5	4.10	V
GPIO28-45_VDD	GPIO28-45 I/O Supply Voltage	−0.5	4.10	V
SDX_VDD	Primary SD/eMMC Supply Voltage	−0.5	4.10	V

DC Characteristics are defined in Table 3.

Table 3.

DC Characteristics

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V_{IL}	Input low voltage[a]	VDD_IO = 1.8 V	-	-	0.6	V
		VDD_IO = 2.7 V	-	-	0.8	V
		VDD_IO = 3.3 V	-	-	0.9	V
V_{IH}	Input high voltage[a]	VDD_IO = 1.8 V	1.0	-	-	V
		VDD_IO = 2.7 V	1.3	-	-	V
		VDD_IO = 3.3 V	1.6	-	-	V
I_{IL}	Input leakage current	T_A = +85°C	-	-	5	µA
C_{IN}	Input capacitance	-	-	5	-	pF
V_{OL}	Output low voltage[b]	VDD_IO = 1.8 V, I_{OL} = −2 mA	-	-	0.2	V
		VDD_IO = 2.7 V, I_{OL} = −2 mA	-	-	0.15	V
		VDD_IO = 3.3 V, I_{OL} = −2 mA	-	-	0.14	V
V_{OH}	Output high voltage[b]	VDD_IO = 1.8 V, I_{OH} = 2 mA	1.6	-	-	V
		VDD_IO = 2.7 V, I_{OH} = 2 mA	2.5	-	-	V
		VDD_IO = 3.3 V, I_{OH} = 2 mA	3.0	-	-	V
I_{OL}	Output low current[c]	VDD_IO = 1.8 V, V_O = 0.4 V	12	-	-	mA
		VDD_IO = 2.7 V, V_O = 0.4 V	17	-	-	mA
		VDD_IO = 3.3 V, V_O = 0.4 V	18	-	-	mA
I_{OH}	Output high current[c]	VDD_IO = 1.8 V, V_O = 1.4 V	10	-	-	mA
		VDD_IO = 2.7 V, V_O = 2.3 V	16	-	-	mA
		VDD_IO = 3.3 V, V_O = 2.3 V	17	-	-	mA

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
R_{PU}	Pullup resistor	-	50	-	65	kΩ
R_{PD}	Pulldown resistor	-	50	-	65	kΩ

- [a] Hysteresis enabled
- [b] Default drive strength (8 mA)
- [c] Maximum drive strength (16 mA)


AC Characteristics are defined in Table 4 and Figure 4.

Table 4.
Digital I/O Pin AC Characteristics

Pin Name	Symbol	Parameter	Minimum	Typical	Maximum	Unit
Digital outputs	t_{rise}	10–90% rise time[a]	-	1.6	-	ns
Digital outputs	t_{fall}	90–10% fall time[a]	-	1.7	-	ns
GPCLK	t_{JOSC}	Oscillator-derived GPCLK cycle-cycle jitter (RMS)	-	-	20	ps
GPCLK	t_{JPLL}	PLL-derived GPCLK cycle-cycle jitter (RMS)	-	-	48	ps

- [a] Default drive strength, C_L = 5 pF, VDD_IOx = 3.3 V

Figure 4.
Digital IO Characteristics

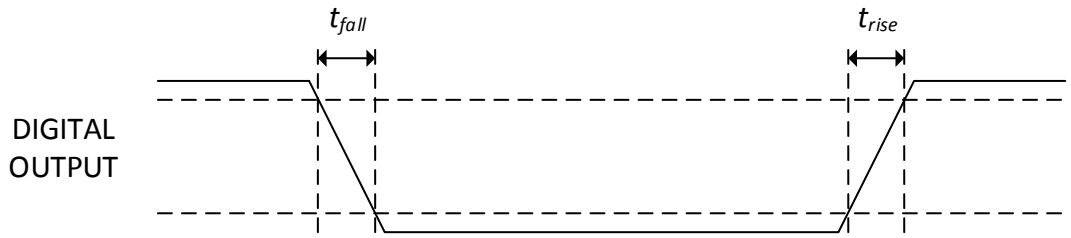

7. Power Supplies

The Compute Module 3+ has six separate supplies that must be present and powered at all times; you cannot leave any of them unpowered, even if a specific interface or GPIO bank is unused. The six supplies are as follows:

1. VBAT is used to power the BCM2837 processor core. It feeds the SMPS that generates the chip core voltage.
2. 3V3 powers various BCM2837 PHYs, IO and the eMMC Flash.
3. 1V8 powers various BCM2837 PHYs, IO and SDRAM.
4. VDAC powers the composite (TV-out) DAC.
5. GPIO0-27_VDD powers the GPIO 0–27 IO bank.
6. GPIO28-45_VDD powers the GPIO 28–45 IO bank.

Table 5.
Power Supply Operating Ranges

Supply	Description	Minimum	Typical	Maximum	Unit
VBAT	Core SMPS Supply	2.5	-	5.0 + 5%	V
3V3	3V3 Supply Voltage	3.3 – 5%	3.3	3.3 + 5%	V
1V8	1V8 Supply Voltage	1.8 – 5%	1.8	1.8 + 5%	V
VDAC	TV DAC Supply[a]	2.5 – 5%	2.8	3.3 + 5%	V
GPIO0–27_VDD	GPIO0-27 I/O Supply Voltage	1.8 – 5%	-	3.3 + 5%	V
GPIO28–45_VDD	GPIO28-45 I/O Supply Voltage	1.8 – 5%	-	3.3 + 5%	V
SDX_VDD	Primary SD/eMMC Supply Voltage	1.8 – 5%	-	3.3 + 5%	V

- [a] Requires a clean 2.5–2.8 V supply if TV DAC is used, else connect to 3V3

7.1. Supply Sequencing

Supplies should be staggered so that the highest voltage comes up first, then the remaining voltages in descending order. This is to avoid forward biasing internal (on-chip) diodes between supplies, and causing latch-up. Alternatively supplies can be synchronised to come up at exactly the same time as long as at no point a lower voltage supply rail voltage exceeds a higher voltage supply rail voltage.

7.2. Power Requirements

Exact power requirements will be heavily dependent upon the individual use case. If an on-chip subsystem is unused, it is usually in a low power state or completely turned off. For instance, if your application does not use 3D graphics then a large part of the core digital logic will never turn on and need power. This is also the case for camera and display interfaces, HDMI, USB interfaces, video encoders and decoders, and so on.

Powerchain design is critical for stable and reliable operation of the Compute Module 3+. We strongly recommend that designers spend time measuring and verifying power requirements for their particular use case and application, as well as paying careful attention to power supply sequencing and maximum supply voltage tolerance.

Table 6 specifies the recommended minimum power supply outputs required to power the Compute Module 3+.

Table 6.
Minimum Power Supply Requirements

Supply	Minimum Requirement	Unit
VBAT (CM1)	2000[a]	mW
VBAT (CM3,3L)	3500[a]	mW

Supply	Minimum Requirement	Unit
3V3	250	mA
1V8	250	mA
VDAC	25	mA
GPIO0-27_VDD	50[b]	mA
GPIO28-45_VDD	50[b]	mA
SDX_VDD	50[b]	mA

- [a] Recommended minimum. Actual power drawn is very dependent on use-case
- [b] Each GPIO can supply up to 16 mA, aggregate current per bank must not exceed 50mA

8. Booting

The eMMC Flash device on CM3+ is directly connected to the primary BCM2837 SD/eMMC interface. These connections are not accessible on the module pins. On CM3+ Lite this SD interface is available on the SDX_ pins.

When initially powered on, or after the RUN pin has been held low and then released, the BCM2837 will try to access the primary SD/eMMC interface. It will then look for a file called bootcode.bin on the primary partition (which must be FAT) to start booting the system. If it cannot access the SD/eMMC device or the boot code cannot be found, it will fall back to waiting for boot code to be written to it over USB; in other words, its USB port is in slave mode waiting to accept boot code from a suitable host.

A USB boot tool is available on Github which allows a host PC running Linux to write the BCM2837 boot code over USB to the module. That boot code then runs and provides access to the SD/eMMC as a USB mass storage device, which can then be read and written using the host PC. Note that a Raspberry Pi can be used as the host machine. For those using Windows a precompiled and packaged tool is available. For more information, see here.

The Compute Module has a pin called EMMC_DISABLE_N which when shorted to GND will disable the SD/eMMC interface (by physically disconnecting the SD_CMD pin), forcing BCM2837 to boot from USB. Note that when the eMMC is disabled in this way, it takes a couple of seconds from powering up for the processor to stop attempting to talk to the SD/eMMC device and fall back to booting from USB.

Note that once booted over USB, BCM2837 needs to re-enable the SD/eMMC device (by releasing EMMC_DISABLE_N) to allow access to it as mass storage. It expects to be able to do this by driving the EMMC_EN_N_1V8 pin LOW, which at boot is initially an input with a pull up to 1V8. If an end user wishes to add the ability to access the SD/eMMC over USB in their product, similar circuitry to that used on the Compute Module IO Board to enable/disable the USB boot and SD/eMMC must be used; that is, EMMC_DISABLE_N pulled low via MOSFET(s) and released again by MOSFET, with the gate controlled by EMMC_EN_N_1V8. textbf{Ensure you use MOSFETs suitable for switching at 1.8 V (i.e. use a device with gate threshold voltage, Vt, suitable for 1.8 V switching).}

9. Peripherals

9.1. GPIO

BCM2837 has in total 54 GPIO lines in 3 separate voltage banks. All GPIO pins have at least two alternative functions within the SoC. When not used for the alternate peripheral function, each GPIO pin may be set as an input (optionally as an interrupt) or an output. The alternate functions are usually peripheral I/Os, and most peripherals appear twice to allow flexibility on the choice of I/O voltage.

GPIO bank2 is used on the module to connect to the eMMC device and for an on-board I2C bus (to talk to the core SMPS and control the special function pins). On CM3+ Lite most of bank2 is exposed to allow a user to connect their choice of SD card or eMMC device (if required).

Bank0 and 1 GPIOs are available for general use. GPIO0 to GPIO27 are bank0 and GPIO28-45 make up bank1. GPIO0-27_VDD is the power supply for bank0 and GPIO28-45_VDD is the power supply for bank1. SDX_VDD is the supply for bank2 on CM3+ Lite. These supplies can be in the range 1.8–3.3 V (see Table 5) and are not optional; each bank must be powered, even when none of the GPIOs for that bank are used.

Note

The HDMI_HPD_N_1V8 and EMMC_EN_N_1V8 pins are 1.8 V IO and are used for special functions (HDMI hot plug detect and boot control respectively). Please do not use these pins for any other purpose, as the software for the module will always expect these pins to have these special functions. If they are unused please leave them unconnected.

All GPIOs except GPIO28, 29, 44, and 45 have weak in-pad pull-ups or pull-downs enabled when the device is powered on. It is recommended to add off-chip pulls to GPIO28, 29, 44, and 45 to make sure they never float during power on and initial boot.

9.1.1. GPIO Alternate Functions

Table 7.
GPIO Bank0 Alternate Functions

	Default						
GPIO	**Pull**	**ALT0**	**ALT1**	**ALT2**	**ALT3**	**ALT4**	**ALT5**
0	High	SDA0	SA5	PCLK	-	-	-
1	High	SCL0	SA4	DE	-	-	-
2	High	SDA1	SA3	LCD_VSYNC	-	-	-
3	High	SCL1	SA2	LCD_HSYNC	-	-	-
4	High	GPCLK0	SA1	DPI_D0	-	-	ARM_TDI
5	High	GPCLK1	SA0	DPI_D1	-	-	ARM_TDO
6	High	GPCLK2	SOE_N	DPI_D2	-	-	ARM_RTCK
7	High	SPI0_CE1_N	SWE_N	DPI_D3	-	-	-
8	High	SPI0_CE0_N	SD0	DPI_D4	-	-	-
9	Low	SPI0_MISO	SD1	DPI_D5	-	-	-
10	Low	SPI0_MOSI	SD2	DPI_D6	-	-	-
11	Low	SPI0_SCLK	SD3	DPI_D7	-	-	-
12	Low	PWM0	SD4	DPI_D8	-	-	ARM_TMS
13	Low	PWM1	SD5	DPI_D9	-	-	ARM_TCK
14	Low	TXD0	SD6	DPI_D10	-	-	TXD1
15	Low	RXD0	SD7	DPI_D11	-	-	RXD1

	Default						
GPIO	**Pull**	**ALT0**	**ALT1**	**ALT2**	**ALT3**	**ALT4**	**ALT5**
16	Low	FL0	SD8	DPI_D12	CTS0	SPI1_CE2_N	CTS1
17	Low	FL1	SD9	DPI_D13	RTS0	SPI1_CE1_N	RTS1
18	Low	PCM_CLK	SD10	DPI_D14	-	SPI1_CE0_N	PWM0
19	Low	PCM_FS	SD11	DPI_D15	-	SPI1_MISO	PWM1
20	Low	PCM_DIN	SD12	DPI_D16	-	SPI1_MOSI	GPCLK0
21	Low	PCM_DOUT	SD13	DPI_D17	-	SPI1_SCLK	GPCLK1
22	Low	SD0_CLK	SD14	DPI_D18	SD1_CLK	ARM_TRST	-
23	Low	SD0_CMD	SD15	DPI_D19	SD1_CMD	ARM_RTCK	-
24	Low	SD0_DAT0	SD16	DPI_D20	SD1_DAT0	ARM_TDO	-
25	Low	SD0_DAT1	SD17	DPI_D21	SD1_DAT1	ARM_TCK	-
26	Low	SD0_DAT2	TE0	DPI_D22	SD1_DAT2	ARM_TDI	-
27	Low	SD0_DAT3	TE1	DPI_D23	SD1_DAT3	ARM_TMS	-

Table 8.

GPIO Bank1 Alternate Functions

	Default						
GPIO	**Pull**	**ALT0**	**ALT1**	**ALT2**	**ALT3**	**ALT4**	**ALT5**
28	None	SDA0	SA5	PCM_CLK	FL0	-	-
29	None	SCL0	SA4	PCM_FS	FL1	-	-
30	Low	TE0	SA3	PCM_DIN	CTS0	-	CTS1
31	Low	FL0	SA2	PCM_DOUT	RTS0	-	RTS1
32	Low	GPCLK0	SA1	RING_OCLK	TXD0	-	TXD1
33	Low	FL1	SA0	TE1	RXD0	-	RXD1
34	High	GPCLK0	SOE_N	TE2	SD1_CLK	-	-
35	High	SPI0_CE1_N	SWE_N	-	SD1_CMD	-	-
36	High	SPI0_CE0_N	SD0	TXD0	SD1_DAT0	-	-
37	Low	SPI0_MISO	SD1	RXD0	SD1_DAT1	-	-
38	Low	SPI0_MOSI	SD2	RTS0	SD1_DAT2	-	-
39	Low	SPI0_SCLK	SD3	CTS0	SD1_DAT3	-	-
40	Low	PWM0	SD4	-	SD1_DAT4	SPI2_MISO	TXD1
41	Low	PWM1	SD5	TE0	SD1_DAT5	SPI2_MOSI	RXD1
42	Low	GPCLK1	SD6	TE1	SD1_DAT6	SPI2_SCLK	RTS1
43	Low	GPCLK2	SD7	TE2	SD1_DAT7	SPI2_CE0_N	CTS1
44	None	GPCLK1	SDA0	SDA1	TE0	SPI2_CE1_N	-
45	None	PWM1	SCL0	SCL1	TE1	SPI2_CE2_N	-

Table 7 and Table 8 detail the default pin pull state and available alternate GPIO functions. Most of these alternate peripheral functions are described in detail in the Broadcom Peripherals Specification document and have Linux drivers available.

9.1.2. Secondary Memory Interface (SMI)

The SMI peripheral is an asynchronous NAND type bus supporting Intel mode80 type transfers at 8 or 16 bit widths and available in the ALT1 positions on GPIO banks 0 and 1 (see Table 7 and Table 8). It is not publicly documented in the Broadcom Peripherals Specification but a Linux driver is available in the Raspberry Pi Github Linux repository (bcm2835_smi.c in linux/drivers/misc).

9.1.3. Display Parallel Interface (DPI)

A standard parallel RGB (DPI) interface is available on bank 0 GPIOs. This up-to-24-bit parallel interface can support a secondary display. Again this interface is not documented in the Broadcom Peripherals Specification but documentation can be found here.

9.1.4. SD/SDIO Interface

The BCM283x supports two SD card interfaces, SD0 and SD1.

The first (SD0) is a proprietary Broadcom controller that does not support SDIO and is the primary interface used to boot and talk to the eMMC or SDX_x signals.

The second interface (SD1) is standards compliant and can interface to SD, SDIO and eMMC devices; for example on a Raspberry Pi 3 B+ it is used to talk to the on-board CYW43455 WiFi device in SDIO mode.

Both interfaces can support speeds up to 50 MHz single ended (SD High Speed Mode).

9.2. CSI (MIPI Serial Camera)

Currently the CSI interface is not openly documented and only CSI camera sensors supported by the official Raspberry Pi firmware will work with this interface. Supported sensors are the OmniVision OV5647 and Sony IMX219.

It is recommended to attach other cameras via USB.

9.3. DSI (MIPI Serial Display)

Currently the DSI interface is not openly documented and only DSI displays supported by the official Raspberry Pi firmware will work with this interface.

Displays can also be added via the parallel DPI interface which is available as a GPIO alternate function - see Table 7 and Section 9.1.3. Display Parallel Interface (DPI)

9.4. USB

The BCM2837 USB port is On-The-Go (OTG) capable. If using either as a fixed slave or fixed master, please tie the USB_OTGID pin to ground.

The USB port (Pins USB_DP and USB_DM) must be routed as 90 ohm differential PCB traces.

Note that the port is capable of being used as a true OTG port however there is no official documentation. Some users have had success making this work.

9.5. HDMI

BCM283x supports HDMI V1.3a.

It is recommended that users follow a similar arrangement to the Compute Module IO Board circuitry for HDMI output.

The HDMI CK_P/N (clock) and D0-D2_P/N (data) pins must each be routed as matched length 100 ohm differential PCB traces. It is also important to make sure that each differential pair is closely phase matched. Finally, keep HDMI traces well away from other noise sources and as short as possible.

Failure to observe these design rules is likely to result in EMC failure.

9.6. Composite (TV Out)

The TVDAC pin can be used to output composite video (PAL or NTSC). Please route this signal away from noise sources and use a 75 Ω PCB trace.

Note that the TV DAC is powered from the VDAC supply which must be a clean supply of 2.5–2.8 V. It is recommended users generate this supply from 3V3 using a low noise LDO.

If the TVDAC output is not used VDAC can be connected to 3V3, but it must be powered even if the TV-out functionality is unused.

10. Thermals

The BCM2837 SoC employs DVFS (Dynamic Voltage and Frequency Scaling) on the core voltage. When the processor is idle (low CPU utilisation), it will reduce the core frequency and voltage to reduce current draw and heat output. When the core utilisation exceeds a certain threshold the core voltage is increased and the core frequency is boosted to the maximum working frequency of 1.2 GHz. The voltage and frequency are throttled back when the CPU load reduces back to an 'idle' level OR when the silicon temperature as measured by the on-chip temperature sensor exceeds 80°C (thermal throttling).

A designer must pay careful attention to the thermal design of products using the CM3+ so that performance is not artificially curtailed due to the processor thermal throttling, as the Quad ARM complex in the BCM2837 can generate significant heat output under load.

10.1. Temperature Range

The operating temperature range of the module is set by the lowest maximum and highest minimum of any of the components used.

The eMMC and LPDDR2 have the narrowest range, these are rated for −25 to +80 degrees Celsius. Therefore the nominal range for the CM3+ and CM3+ Lite is −25°C to +80°C.

However, this range is the maximum for the silicon die; therefore, users would have to take into account the heat generated when in use and make sure this does not cause the temperature to exceed 80 degrees Celsius.

11. Availability

Raspberry Pi guarantee availability of CM3+ and CM3+ Lite until at least January 2028.

12. Support

For support, see the hardware documentation section of the Raspberry Pi website and post questions to the Raspberry Pi forum.



Raspberry Pi

Raspberry Pi is a trademark of Raspberry Pi Ltd

Raspberry Pi Ltd