1.8V PHASE LOCKED LOOP DIFFERENTIAL 1:10 SDRAM CLOCK DRIVER

IDTCSPUA877A

FEATURES:

- 1 to 10 differential clock distribution
- Optimized for clock distribution in DDR2 (Double Data Rate) SDRAM applications
- Operating frequency: 125MHz to 410MHz
- Stabilization time: <6us
- Very low skew: ≤40ps
- Very low jitter: ≤40ps
- 1.8V AV_{DD} and 1.8V V_{DDQ}
- CMOS control signal input
- Test mode enables buffers while disabling PLL
- Low current power-down mode
- Tolerant of Spread Spectrum input clock
- Available in 52-Ball VFBGA and 40-pin VFQFPN packages

APPLICATIONS:

- Meets or exceeds JEDEC standard CUA877 for registered DDR2 clock driver
- Along with SSTUA32864/66, DDR2 register, provides complete solution for DDR2 DIMMs


DESCRIPTION:

The CSPUA877A is a PLL based clock driver that acts as a zero delay buffer to distribute one differential clock input pair(CLK, $\overline{CLK}$) to 10 differential output pairs ($\overline{Y}$ [0:9], Y [0:9]) and one differential pair of feedback clock output (FBOUT, $\overline{FBOUT}$). External feedback pins (FBIN, $\overline{FBIN}$) for synchronization of the outputs to the input reference is provided. OE, OS, and A_{VDD} control the power-down and test mode logic. When A_{VDD} is grounded, the PLL is turned off and bypassed for test mode purposes. When the differential clock inputs (CLK, $\overline{CLK}$) are both at logic low, this device will enter a low power-down mode. In this mode, the receivers are disabled, the PLL is turned off, and the output clock drivers are disabled, resulting in a clock driver current consumption of less than 500µA.

The CSPUA877A requires no external components and has been optimised for very low phase error, skew, and jitter, while maintaining frequency and duty cycle over the operating voltage and temperature range. The CSPUA877 , designed for use in both module assemblies and system motherboard based solutions, provides an optimum high-performance clock source.

The CSPUA877A is available in Commercial Temperature Range (0°C to +70°C). See Ordering Information for details.

FUNCTIONAL BLOCK DIAGRAM

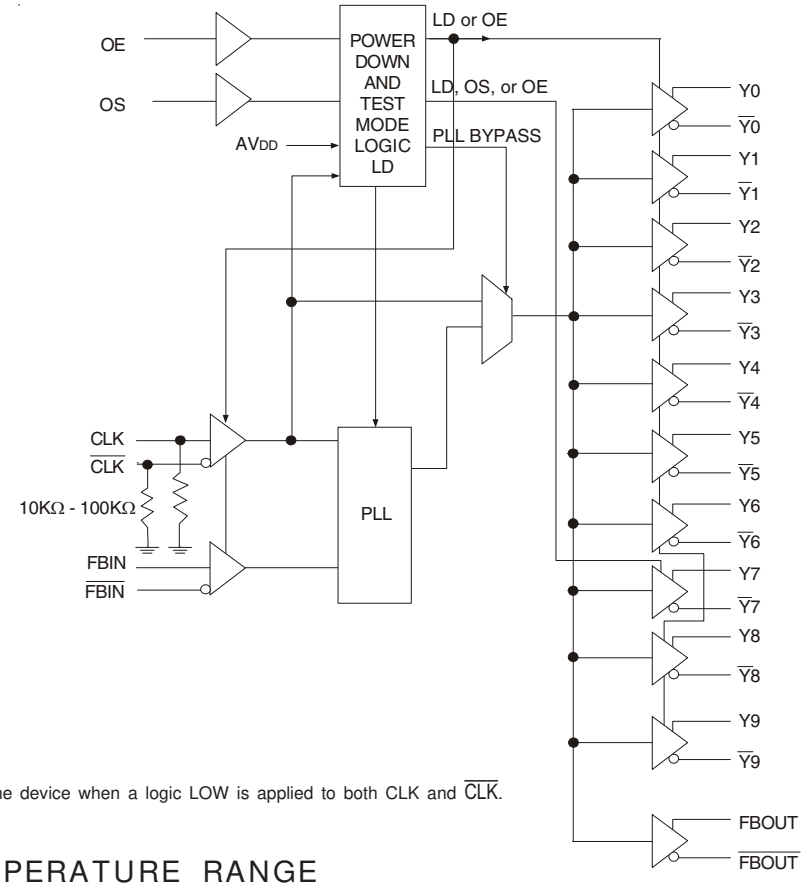

NOTE:
The Logic Detect (LD) powers down the device when a logic LOW is applied to both CLK and $\overline{CLK}$.


© 2019 Renesas Electronics Corporation

PIN CONFIGURATION

	A	B	C	D	E	F	G	H	J	K
6	Y6	$\overline{Y6}$	$\overline{Y7}$	Y7	FBIN	$\overline{FBIN}$	$\overline{FBOUT}$	FBOUT	Y8	$\overline{Y8}$
5	Y5	GND	GND	OS	V_{DDQ}	OE	V_{DDQ}	GND	GND	$\overline{Y9}$
4	$\overline{Y5}$	GND	NB	V_{DDQ}	NB	NB	V_{DDQ}	NB	GND	Y9
3	$\overline{Y0}$	GND	NB	V_{DDQ}	NB	NB	V_{DDQ}	NB	GND	Y4
2	Y0	GND	GND	V_{DDQ}	V_{DDQ}	V_{DDQ}	V_{DDQ}	GND	GND	$\overline{Y4}$
1	Y1	$\overline{Y1}$	$\overline{Y2}$	Y2	CLK	$\overline{CLK}$	AGND	AV_{DD}	Y3	$\overline{Y3}$


VFBGA
TOP VIEW

52 BALL VFBGA PACKAGE LAYOUT

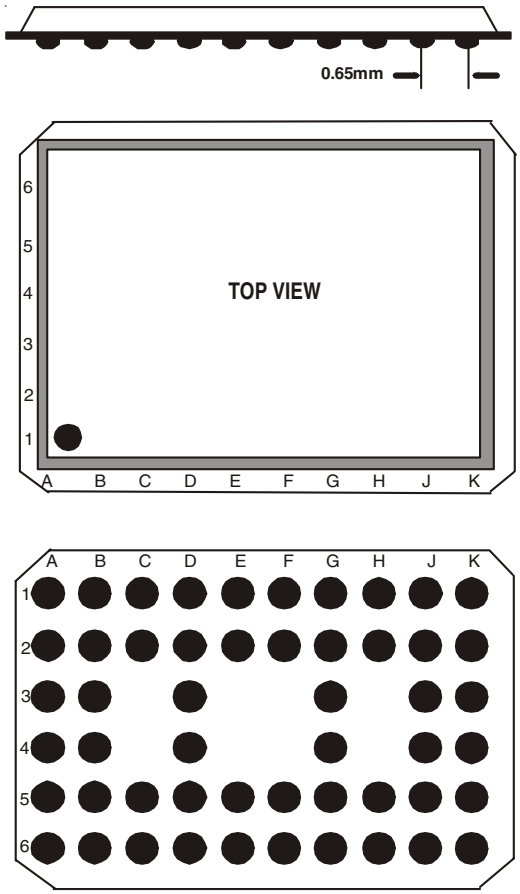

© 2019 Renesas Electronics Corporation

PIN CONFIGURATION, CONT.

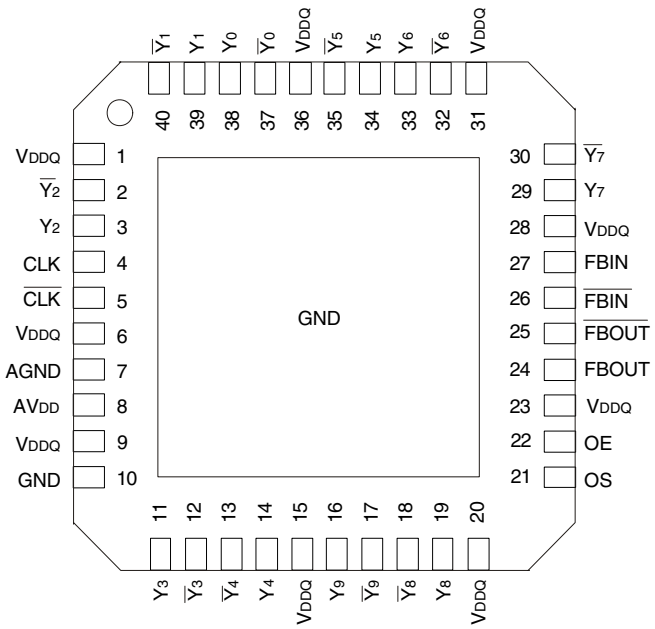

VFQFPN
TOP VIEW

ABSOLUTE MAXIMUM RATINGS(1,2)

Symbol	Rating	Max	Unit
V_{DDQ}, AV_{DD}	Supply Voltage Range	–0.5 to +2.5	V
V_I(3)	Input Voltage Range	–0.5 to V_{DDQ} + 0.5	V
V_O(3)	Voltage range applied to any output in the high or low state	–0.5 to V_{DDQ} + 0.5	V
I_{IK} (V_I <0)	Input clamp current	±50	mA
I_{OK} (V_O <0 or V_O > V_{DDQ})	Output Clamp Current	±50	mA
I_O (V_O =0 to V_{DDQ})	Continuous Output Current	±50	mA
V_{DDQ} or GND	Continuous Current	±100	mA
TSTG	Storage Temperature Range	– 65 to +150	°C

NOTES:
1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. The maximum package power dissipation is calculated using a junction temperature of 150°C and a board trace length of 750 mils.
3. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed. This value is limited to 2.5V max.

CAPACITANCE(1)

Parameter	Description	Min.	Typ.	Max.	Unit
C_{IN}	Input Capacitance V_I = V_{DDQ} or GND	2	—	3	pF
$C_{I\Delta}$	Delta Input Capacitance CLK, $\overline{CLK}$, FBIN, $\overline{FBIN}$			0.25	pF
C_L	Load Capacitance	—	10	—	pF

NOTE:
1. Unused inputs must be held high or low to prevent them from floating.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min.	Typ.	Max.	Unit
AV_{DD}(1)	Supply Voltage		V_{DDQ}		V
V_{DDQ}	I/O Supply Voltage	1.7	1.8	1.9	V
T_A	Operating Free-Air Temperature	0	—	+70	°C

NOTE:
1. The PLL is turned off and bypassed for test purposes when AV_{DD} is grounded. During this test mode, V_{DDQ} remains within the recommended operating conditions and no timing parameters are guaranteed.

© 2019 Renesas Electronics Corporation

PIN DESCRIPTION (VFBGA)

Pin Name	Pin Number	Description
AGND	G1	Ground for 1.8V analog supply
AV_{DD}	H1	1.8V analog supply
CLK, $\overline{CLK}$	E1, F1	Differential clock input with a 10KΩ to 100KΩ pulldown resistor
FBIN, $\overline{FBIN}$	E6, F6	Feedback differential clock input
$\overline{FBOUT}$, FBOUT	G6, H6	Feedback differential clock output
GND	B2 - B5, C2, C5, H2, H5, J2 - J5	Ground
V_{DDQ}	D2 - D4, E2, E5, F2, G2 - G5	1.8V supply
OE	F5	Output Enable
OS	D5	Output Select (tied to GND or V_{DDQ})
$\overline{Y_{[0:9]}}$	A3, A4, B1, B6, C1, C6, K1, K2, K5, K6	Buffered output of input clock, $\overline{CLK}$
$Y_{[0:9]}$	A1, A2, A5, A6, D1, D6, J1, J6, K3, K4	Buffered output of input clock, CLK
NB		No Ball

PIN DESCRIPTION (VFQFPN)

Pin Name	Pin Number	Description
AGND	7	Ground for 1.8V analog supply
AV_{DD}	8	1.8V analog supply
CLK, $\overline{CLK}$	4, 5	Differential clock input with a 10KΩ to 100KΩ pulldown resistor
FBIN, $\overline{FBIN}$	26, 27	Feedback differential clock input
$\overline{FBOUT}$, FBOUT	24, 25	Feedback differential clock output
GND	10	Ground
V_{DDQ}	1, 6, 9, 15, 20, 23, 28, 31, 36	1.8V supply
OE	22	Output Enable
OS	21	Output Select (tied to GND or V_{DDQ})
$Y_{[0:9]}$	3, 11, 14, 16, 19, 29, 33, 34, 38, 39	Buffered output of input clock, CLK
$\overline{Y_{[0:9]}}$	2, 12, 13, 17, 18, 30, 32, 35, 37, 40	Buffered output of input clock, $\overline{CLK}$
NB		No Ball

© 2019 Renesas Electronics Corporation

FUNCTION TABLE(1,2)

INPUTS					OUTPUTS				
AV_{DD}	OE	OS	CLK	$\overline{CLK}$	Y	$\overline{Y}$	FBOUT	$\overline{FBOUT}$	PLL
GND	H	X	L	H	L	H	L	H	OFF
GND	H	X	H	L	H	L	H	L	OFF
GND	L	H	L	H	L(z)	L(z)	L	H	OFF
GND	L	L	H	L	L(z) Y_7 Active	L(z) $\overline{Y_7}$ Active	H	L	OFF
1.8V (nom)	L	H	L	H	L(z)	L(z)	L	H	ON
1.8V (nom)	L	L	H	L	L(z) Y_7 Active	L(z) $\overline{Y_7}$ Active	H	L	ON
1.8V (nom)	H	X	L	H	L	H	L	H	ON
1.8V (nom)	H	X	H	L	H	L	H	L	ON
1.8V (nom)	X	X	L(3)	L(3)	L(z)	L(z)	L(z)	L(z)	OFF
X	X	X	H	H	Reserved				

NOTES:
1. H = HIGH Voltage Level
   L = LOW Voltage Level
   X = Don't Care
2. L(z) means the outputs are disabled to a LOW state, meeting the I_{ODL} limit in DC Electrical Characteristics table.
3. The device will enter a low power-down mode when CLK and $\overline{CLK}$ are both at logic LOW.

© 2019 Renesas Electronics Corporation

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Commercial: T_A = 0°C to +70°C

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{IK}	Input Clamp Voltage (All Inputs)	V_{DDQ} = 1.7V, I_I = -18mA	—	—	–1.2	V
V_{IL}[2]	Input LOW Voltage (OE, OS, CLK, $\overline{CLK}$)		—	—	0.35V_{DDQ}	V
V_{IH}[2]	Input HIGH Voltage (OE, OS, CLK, $\overline{CLK}$)		0.65V_{DDQ}	—	—	
V_{IN}[1]	Input Signal Voltage		-0.3	—	V_{DDQ} + 0.3	V
$V_{ID(DC)}$[2]	DC Input Differential Voltage		0.3		V_{DDQ} + 0.4	V
V_{OD}[3]	Output Differential Voltage	A_{VDD}/V_{DDQ} = 1.7V	0.6	—	—	V
V_{OH}	Output HIGH Voltage	I_{OH} = -100µA, V_{DDQ} = 1.7V to 1.9V	V_{DDQ} - 0.2		—	V
		I_{OH} = -9mA, V_{DDQ} = 1.7V	1.1		—	
V_{OL}	Output LOW Voltage	I_{OL} = 100µA, V_{DDQ} = 1.7V to 1.9V			0.1	V
		I_{OL} = 9mA, V_{DDQ} = 1.7V			0.6	
I_{ODL}	Output Disabled LOW Current	OE = L, V_{ODL} = 100mV, A_{VDD}/V_{DDQ} = 1.7V	100	—	—	µA
I_{IN}	Input Current: CLK, $\overline{CLK}$	A_{VDD}/V_{DDQ} = Max., V_I = 0V to V_{DDQ}			±250	µA
	Input Current: OE, OS, FBIN, $\overline{FBIN}$				±10	
I_{DDLD}	Static Supply Current (I_{DDQ} and I_{ADD})	A_{VDD}/V_{DDQ} = Max., CLK and $\overline{CLK}$ = GND			500	µA
I_{DD}	Dynamic Power Supply Current (I_{DDQ} and I_{ADD})[4,5]	A_{VDD}/V_{DDQ} = Max., CLK = 410MHz			300	mA

NOTES:

1. V_{IN} specifies the allowable DC excursion of each different output.
2. V_{ID} is the magnitude of the difference between the input level on CLK and the input level on $\overline{CLK}$. The CLK and $\overline{CLK}$ V_{IH} and V_{IL} limits are used to define the DC LOW and HIGH levels for the power down mode.
3. V_{OD} is the magnitude of the difference between the true output level and the complementary level.
4. All Outputs are left open (unconnected to PCB).
5. Total I_{DD} = I_{DDQ} + I_{ADD} = F_{CK} * C_{PD} * V_{DDQ}, for Cpd = (I_{DDQ} + I_{ADD}) / (F_{CK} * V_{DDQ}) where F_{CK} is the input frequency, V_{DDQ} is the power supply, and C_{PD} is the Power Dissipation Capacitance.

TIMING REQUIREMENTS

Symbol	Parameter	Min.	Max.	Unit
f_{CLK}	Operating Clock Frequency[1,2,5]	125	410	MHz
	Application Clock Frequency[1,3,5]	160	410	MHz
t_{DC}	Input Clock Duty Cycle	40	60	%
t_L	Stabilization Time[4]	—	6	µs

NOTES:

1. The PLL will track a spread spectrum clock input.
2. Operating clock frequency is the range over which the PLL will lock, but may not meet all timing specifications. To be used only for low speed system debug.
3. Application clock frequency is the range over which timing specifications apply.
4. Stabilization time is the time required for the integrated PLL circuit to obtain phase lock of its feedback signal to its reference signal after power up. During normal operation, the stabilization time is also the time required for the PLL circuit to obtain phase lock of its feedback signal to its reference signal when CLK and $\overline{CLK}$ go to a logic LOW state, enters the power-down mode, and later return to active operation. CLK and $\overline{CLK}$ may be left floating after they have been driven LOW for one complete clock cycle.
5. Will lock to input frequency as low as 30MHz at room temperature and nominal or higher supply voltage (1.8V - 1.9V).

© 2019 Renesas Electronics Corporation

AC ELECTRICAL CHARACTERISTICS(1)

Symbol	Description	f_{CK} (MHz)	Min.	Typ.(2)	Max.	Unit
t_{EN}	OE to any Y/$\overline{Y}$	160 to 410	—	—	8	ns
t_{DIS}	OE to any Y/$\overline{Y}$	160 to 410	—	—	8	ns
$SLR_{(I)}$	Output Enable ($\overline{OE}$)	160 to 410	0.5	—	—	V/ns
	Input Clock Slew Rate, measured single-ended	160 to 410	1	2.5	4	
$SLR_{(O)}$(4)	Output Clock Slew Rate, measured single-ended	160 to 410	1.5	2.5	3	V/ns
V_{OX}(6)	Output Differential-Pair Cross-Voltage	160 to 410	(V_{DDQ}/2) -0.1	—	(V_{DDQ}/2) +0.1	V
$t_{JIT(CC+)}$	Cycle-to-Cycle Period Jitter	160 to 410	0	—	40	ps
$t_{JIT(CC-)}$	Cycle-to-Cycle Period Jitter	160 to 410	0	—	-40	ps
$t_{(\varnothing)}$(5)	Static Phase Offset	160 to 410	-50	—	50	ps
$t_{(\varnothing)DYN}$(7)	Dynamic Phase Offset	160 to 270	-50	—	50	ps
		271 to 410	$t_{(\varnothing)DYN(MIN)}$	—	$t_{(\varnothing)DYN(MAX)}$	
$t_{SK(O)}$(7)	Output Clock Skew	160 to 270	—	—	40	ps
		271 to 410	—	—	$t_{SK(O)MAX}$	
$t_{JIT(PER)}$(3,7)	Period Jitter	160 to 270	-40	—	40	ps
		271 to 410	$t_{JIT(PER)MIN}$	—	$t_{JIT(PER)MAX}$	
$t_{JIT(HPER)}$(3)	Half-Period Jitter	160 to 270	-75	—	75	ps
		271 to 410	-50	—	50	
$\Sigma t_{(SU)}$(7)	$\lvert t_{JIT(PER)} \rvert + \lvert t_{(\varnothing)DYN} \rvert + t_{SK(O)}$	271 to 410	—	—	80	ps
$\Sigma t_{(H)}$(7)	$\lvert t_{(\varnothing)DYN} \rvert + t_{SK(O)}$	271 to 410	—	—	60	ps
The PLL on the CSPUA877A will meet all the above test parameters while supporting SSC synthesizers with the following parameters:						
	SSC Modulation Frequency		30	—	33	KHz
	SSC Clock Input Frequency Deviation		0	—	0.5	%
CSPUA877A PLL designs should target the value below to minimize SSC-induced skew:						
	PLL Loop Bandwidth (-3dB from unity gain)		2	—	—	MHz

NOTES:

1. There are two different terminations that are used with the above AC tests. The output load shown in figure 1 is used to measure the input and output differential pair cross-voltage only. The output load shown in figure 2 is used to measure all other tests, including input and output slew rates. For consistency, use 50Ω equal length cables with SMA connectors on the test board.
2. Refers to transition of non-inverting output.
3. Period jitter and half-period jitter specifications are seperate specifications that must be met independently of each other.
4. To eliminate the impact of input slew rates on static phase offset, the input slew rates of reference clock input (CLK, $\overline{CLK}$) and feedback clock input (FBIN, $\overline{FBIN}$) are recommended to be nearly equal. The 2.5V/ns slew rates are shown as a recommended target. Compliance with these nominal values is not mandatory if it can be adequately demonstrated that alternative characteristics meet the requirements of the registered DDR2 DIMM application.
5. Static phase offset does not include jitter.
6. V_{OX} is specified at the DDR DRAM clock input or test load.
7. In the frequency range of 271 - 410MHz, the min and max values for $t_{JIT(PER)}$ and $t_{(\varnothing)DYN}$, and the max value for $t_{SK(O)}$, must not exceed the corresponding min and max values of the 160 - 270MHz range. Also, the sum of the specified values for $\lvert t_{JIT(PER)} \rvert$, $\lvert t_{(\varnothing)DYN} \rvert$, and $t_{SK(O)}$ must meet the requirement for $\Sigma t_{(SU)}$, and the sum of the specified values for $\lvert t_{(\varnothing)DYN} \rvert$ and $t_{SK(O)}$ must meet the requirement for $\Sigma t_{(H)}$.

© 2019 Renesas Electronics Corporation

TEST CIRCUIT AND SWITCHING WAVEFORMS

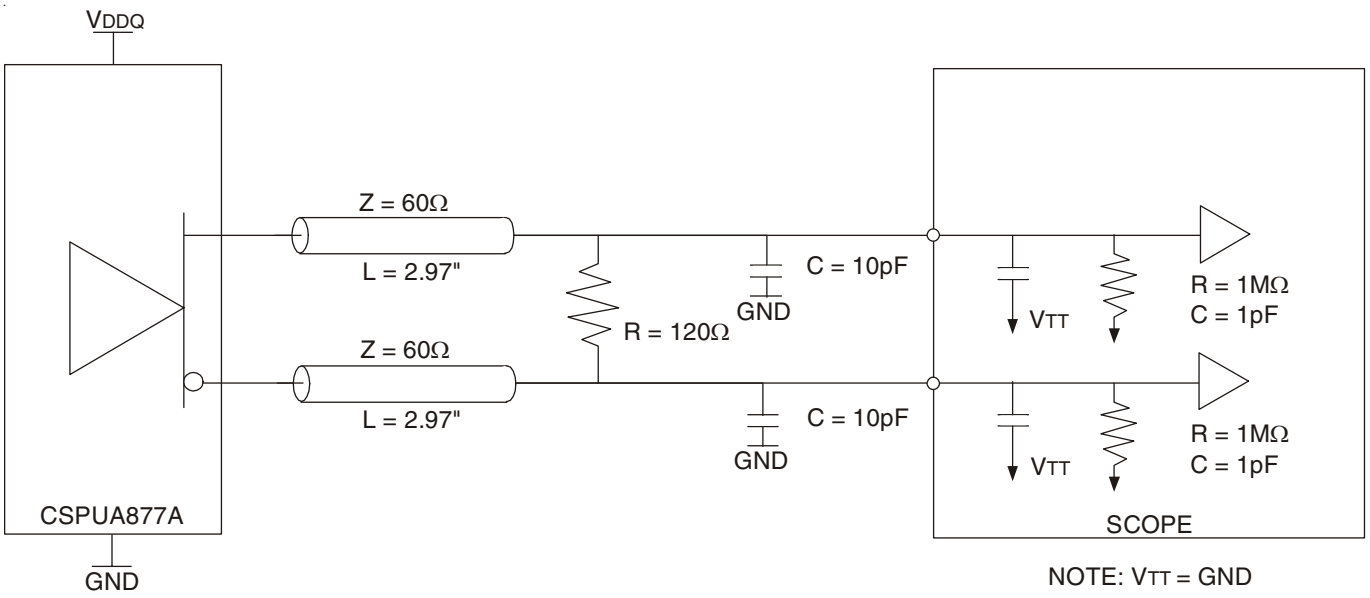


Figure 1: Output Load Test Circuit 1


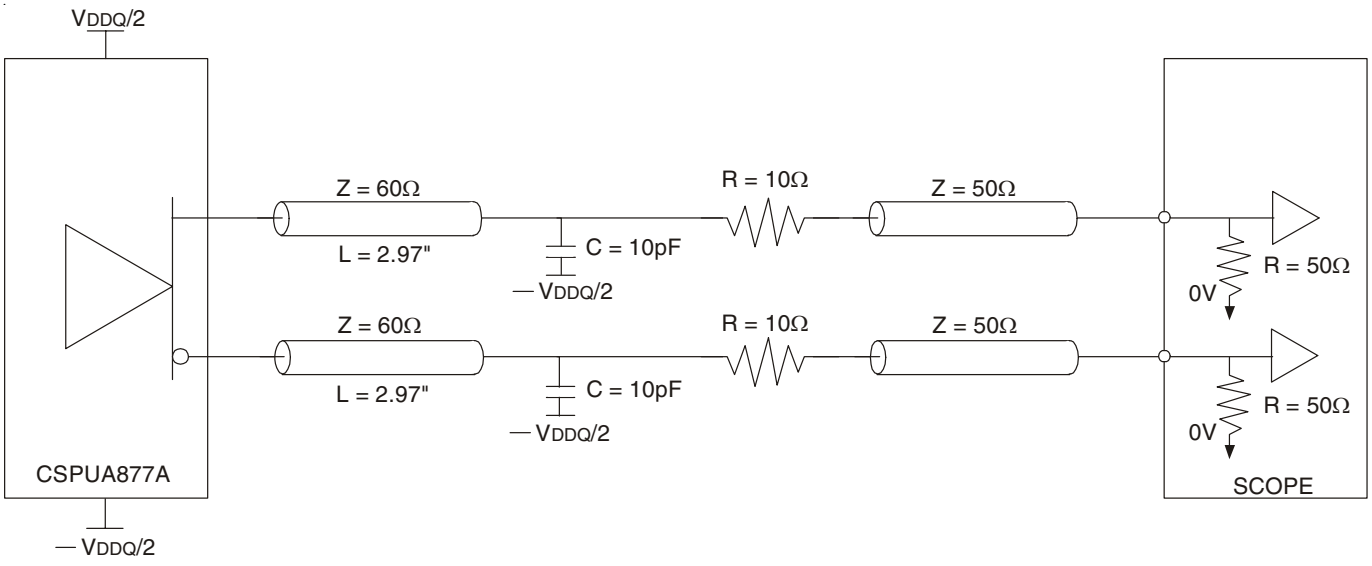


Figure 2: Output Load Test Circuit 2


© 2019 Renesas Electronics Corporation

TEST CIRCUIT AND SWITCHING WAVEFORMS

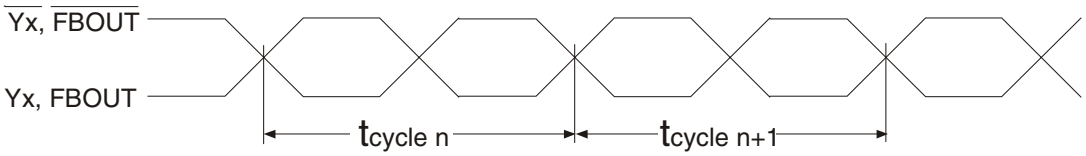

$$t_{jit(cc)} = t_{cycle\ n} - t_{cycle\ n+1}$$


Cycle-to-Cycle jitter

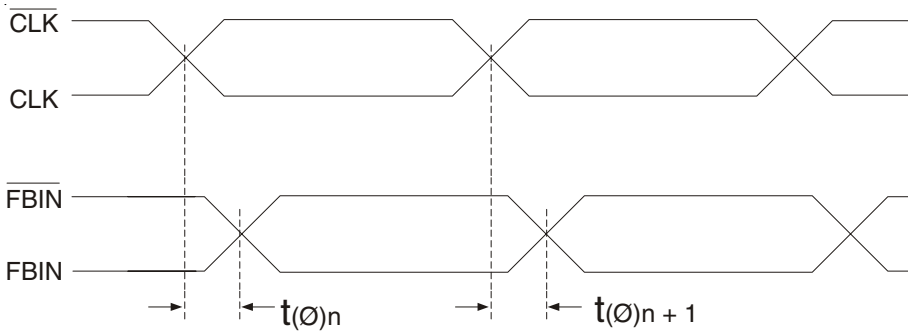

$$t_{(Ø)} = \frac{\sum_{1}^{n=N} t_{(Ø)n}}{N}$$

(N is a large number of samples)


Static Phase Offset

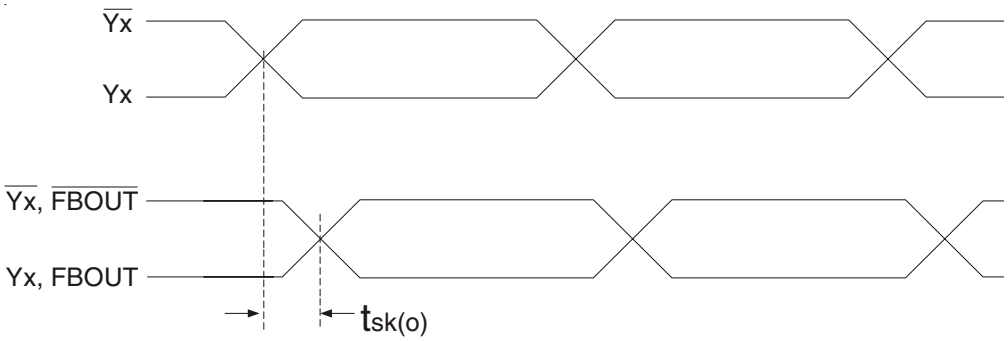

Output Skew

© 2019 Renesas Electronics Corporation


TEST CIRCUIT AND SWITCHING WAVEFORMS

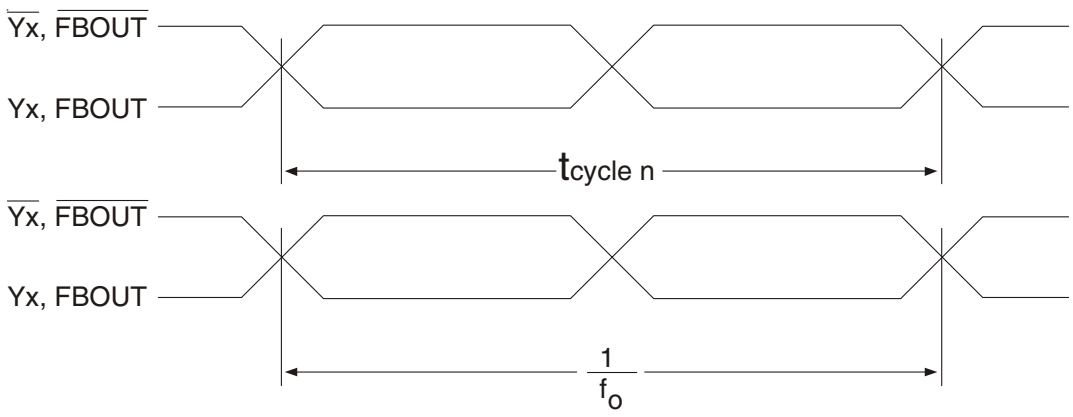

$$t_{jit(per)} = t_{cycle\ n} - \frac{1}{f_o}$$

NOTE:
fo = Average input frequency measured at CLK / $\overline{CLK}$

Period jitter

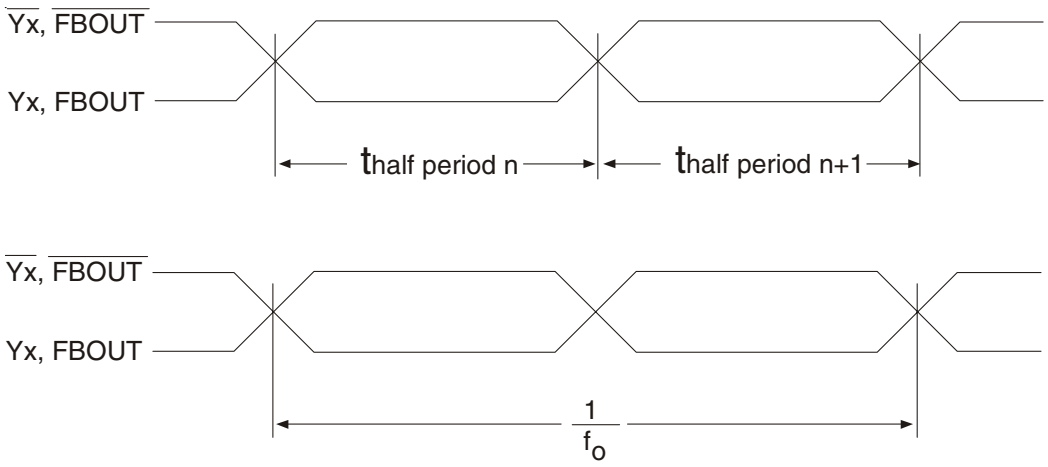


$$t_{jit(hper)} = t_{half\ period\ n} - \frac{1}{2*f_o}$$

NOTE:
fo = Average input frequency measured at CLK / $\overline{CLK}$


Half-Period jitter

© 2019 Renesas Electronics Corporation

TEST CIRCUIT AND SWITCHING WAVEFORMS

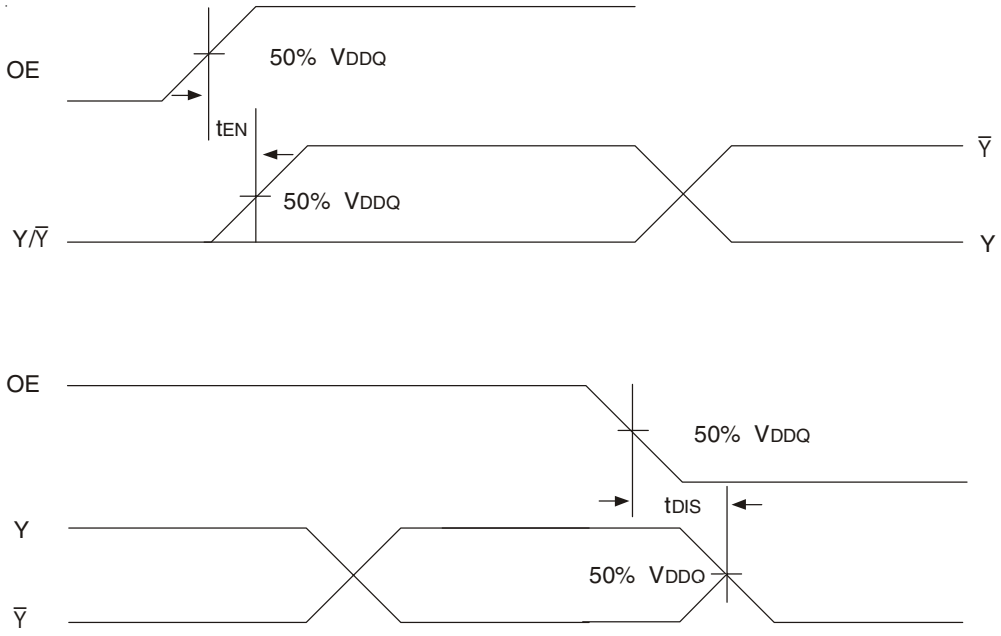


Time Delay Between Output Enable (OE) and Clock Output (Y, $\overline{Y}$)

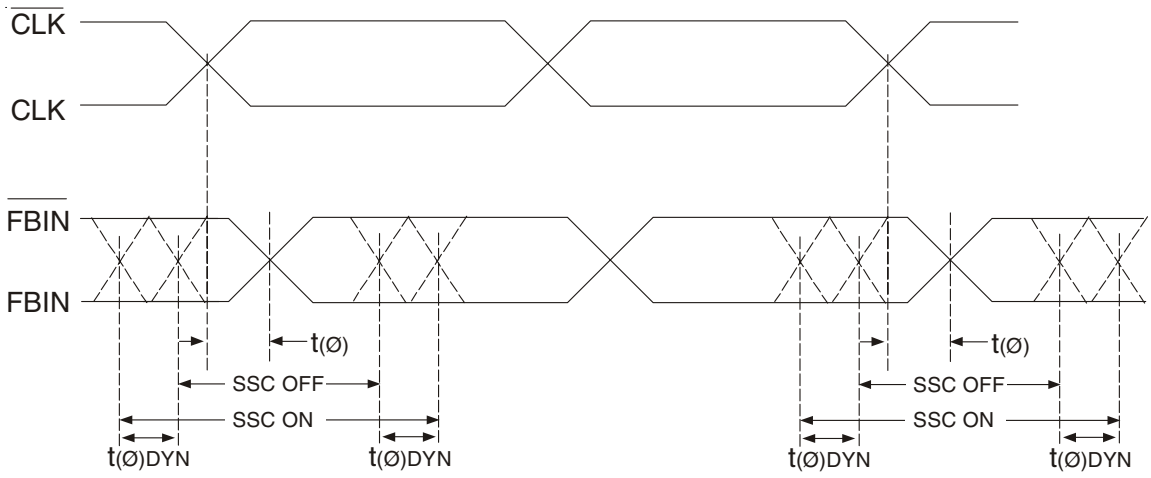


Dynamic Phase Offset

© 2019 Renesas Electronics Corporation

TEST CIRCUIT AND SWITCHING WAVEFORMS

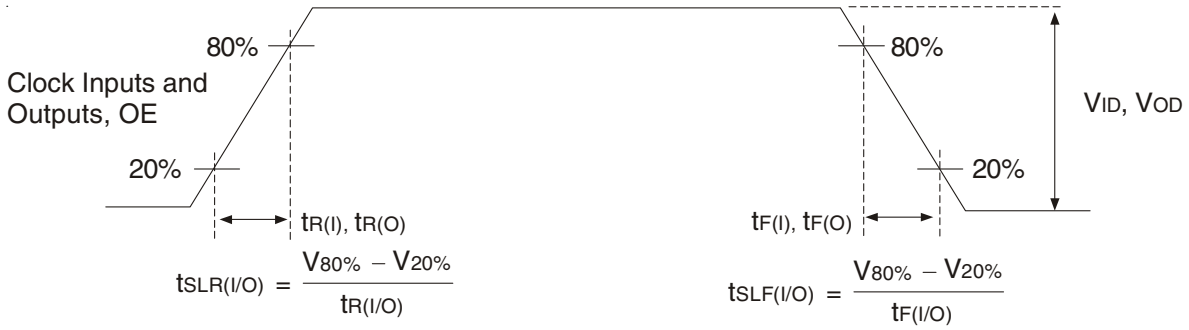

Input and Output Slew Rates

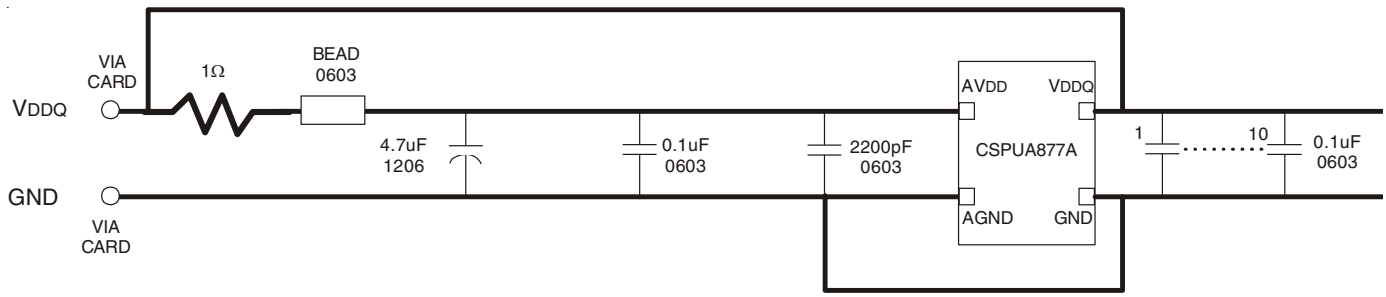

NOTES:

Place all decoupling capacitors as close to the CSPUA877A pins as possible.

Use wide traces for AVDD and AGND.

Recommended bead: Fair-rite P/N 2506036017Y0 or equivalent (0.8Ω DC max., 600Ω at 100MHz).


Recommended Filtering for the Analog and Digital Power Supplies (AVDD and VDDQ)

APPLICATION INFORMATION


Clock Structure	# of SDRAM Loads per Clock	Clock Loading on the PLL outputs (pF)	
		Min.	Max.
#1	2	3	5
#2	4	6	10

© 2019 Renesas Electronics Corporation

APPLICATION INFORMATION

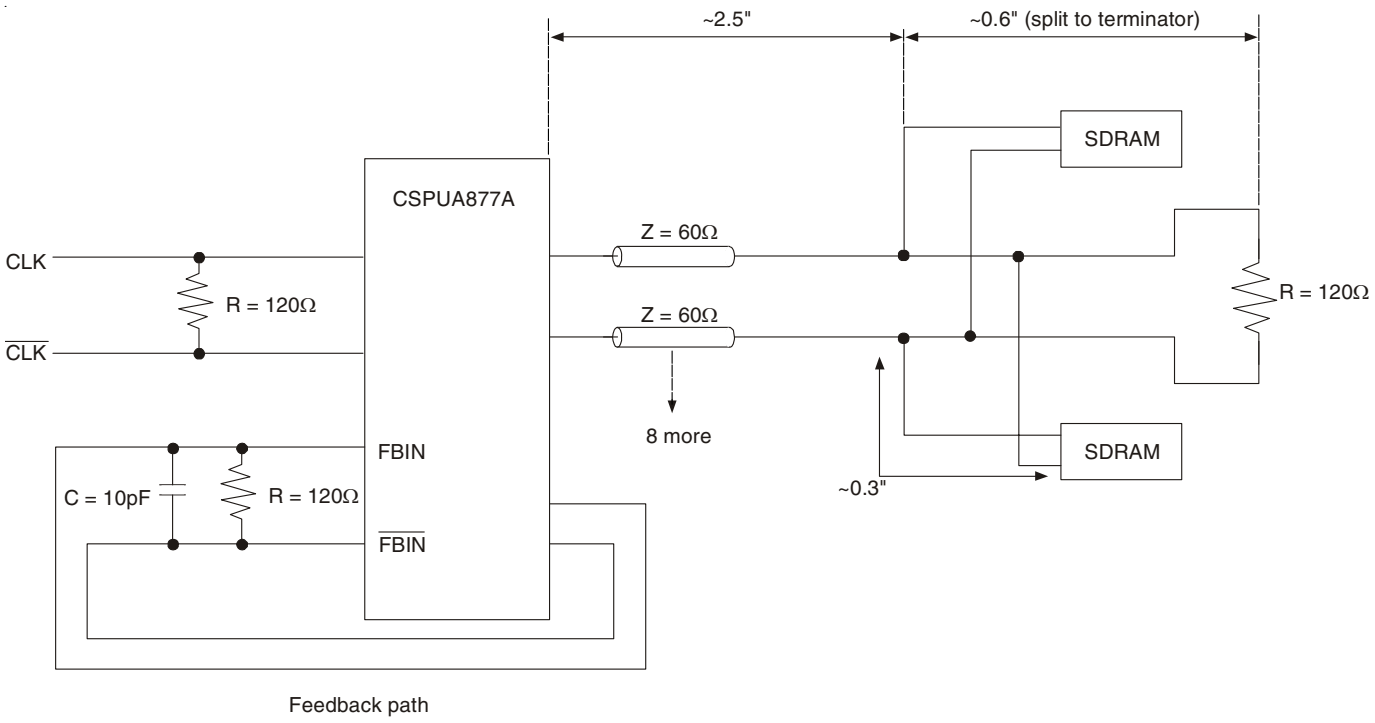


Clock Structure 1

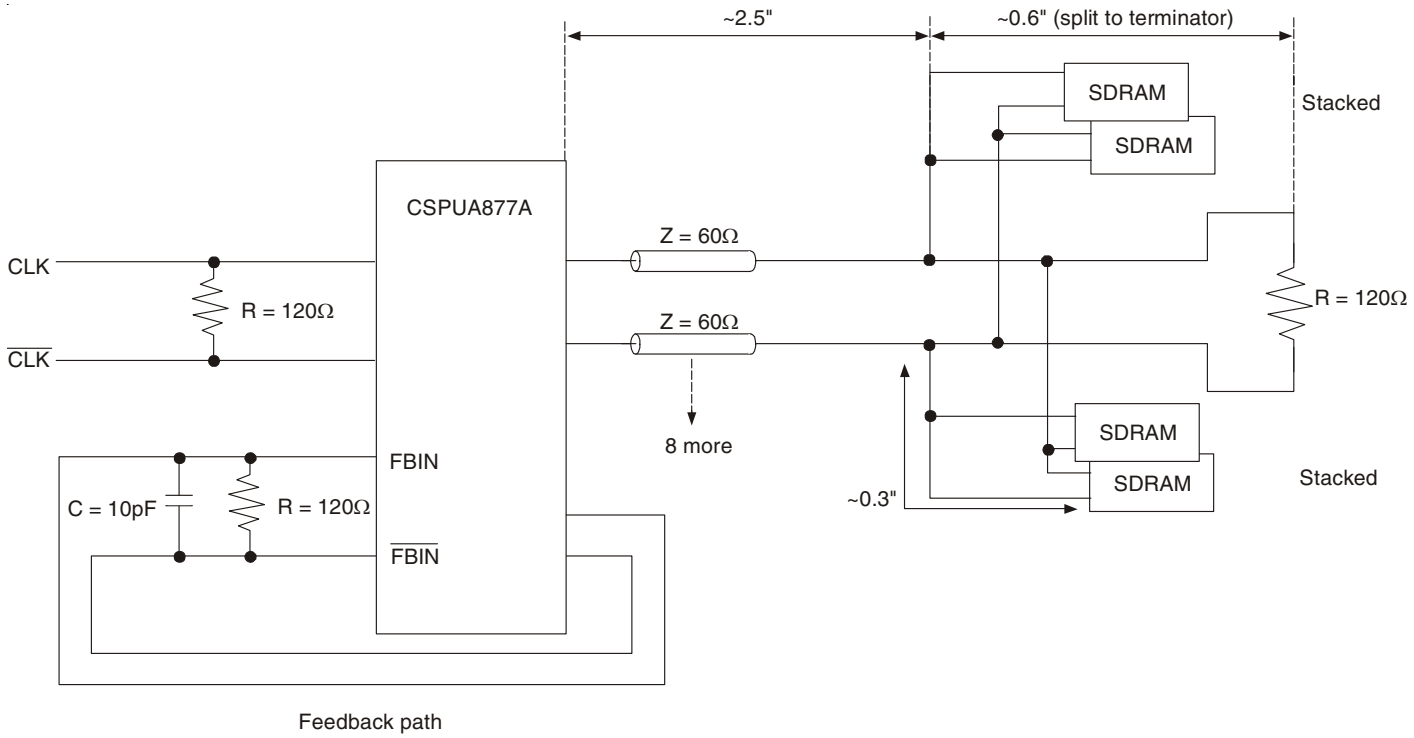

Clock Structure 2

© 2019 Renesas Electronics Corporation

ORDERING INFORMATION

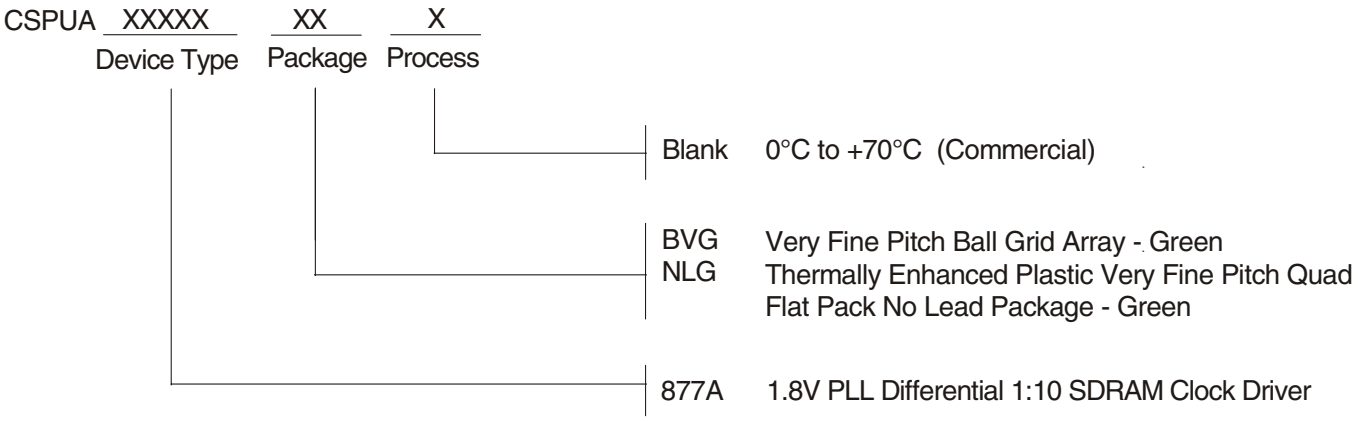

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

© 2026 Renesas Electronics Corporation. All rights reserved.