NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9230
   BODY & FITTINGS: BRASS. NICKEL PLATED.
   PIN: BRASS. GOLD PLATED.
   DIELECTRIC: PTFE.

2. P/N: 0482 & P/N: 0148/0 & P/N: 0581
   HOUSING: BLK MOLDED DELRIN
   CONTACT: GOLD PLATED BeCu
   HEAT SHRINK: BLK HEAT SHRINK


3. P/N: 9260BLK
   HOUSING: BLK MOLDED NYLON.
   FRAME: NICKEL PLATED BRASS.
   CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.

4. P/N: 9260RED
   HOUSING: RED MOLDED NYLON.
   FRAME: NICKEL PLATED BRASS.
   CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.


5. P/N: W-600/0
   18AWG TINNED COPPER STRANDING
   0.144 [3.66] O.D. PVC INSULATION

6. P/N: W-600/2
   20AWG TINNED COPPER STRANDING
   0.144 [3.66] O.D. PVC INSULATION

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED



WIRING SCHEMATIC

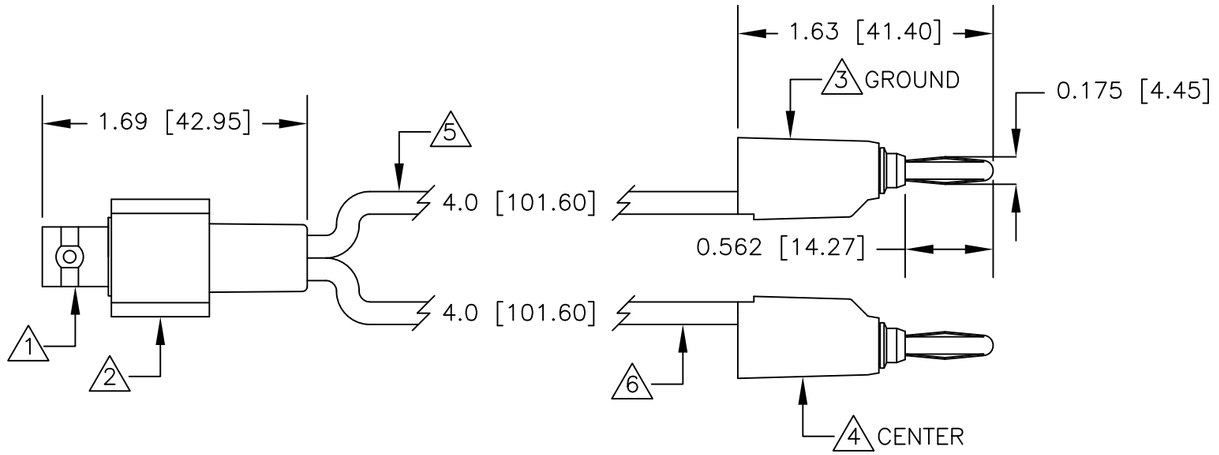

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± DECIMALS .XX ± .XXX ± ANGLES ±	CONTRACT NO.	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS / DATE	
			DRAWN R.L. 4/19	DESCRIPTION: BNC FEMALE BREAKOUT TO 4" 9260 STK BAN PLUG LEADS
		MATERIAL: SEE NOTE.	APPROVED BY	
		FINISH: SEE NOTE.		SIZE B | CODE IDENT NO. 08505 | DRAWING NO. 1002 | REV.
NEXT ASSY	USED ON			SCALE 1:1 | SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.