



Specifications:
Current Rating:1.5A AC/DC(VBS&GND)
0.25A AC/DC(Others)
Voltage Rating: 30V AC/DC
Contact Resistance:30m ohm. Max.(VBS&GND)
50m ohm. Max.(Others)
Insulation Resistance:100M ohm. Min.
Withstanding Voltage:100V AC For One Minute
Operating Temperature Range:−40°C to +105°C
Material and Finish
Insulator:PBT (UL94V−0)
Insulator Color:Blue
Contact:Phosphor Bronze
Plating:15u" Gold Plated on Contact Area,
Tin Plated on Solder Tail.
Shell:Brass,Nickel Plated



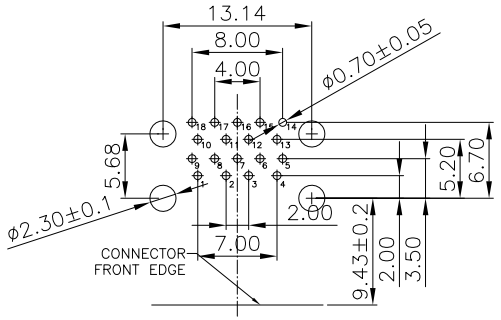

PCB layout(TOP VIEW)

RoHS Compliant

REV	DATE	FILE	BY
	05−FEB−2020		

DRAWN: JAMIE
CHECKED: JERRY
APPROVAL: RORY

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.10

UNIT: MM
SCALE:1:1
SHEET: 1 / 2
PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION:
USB 3.0 AF Double Rows Right Angle Dip Type,15u"

PART NO:
1003-004-01010

SIZE
A4