


Specifications:
Current Rating: 1.0A AC,DC
Contact Resisitance: 50m ohm.Max
Insulation Resisitance: 100M ohm.Min
Withstanding Voltage: 100V AC/Minute

Material:
Insulator: Nylon6T(UL94V-0), Black
Back Cover: LCP(UL94V-0), Black
Contact: Phosphor Bronze
Finish: 15u" Gold/Tin Plated
Front Shell: SUS304, Nickel Plated
Hook: SUS301
Upper SPCC: SPCC, Nickel Plated
Lower SPCC: SPCC, Nickel Plated

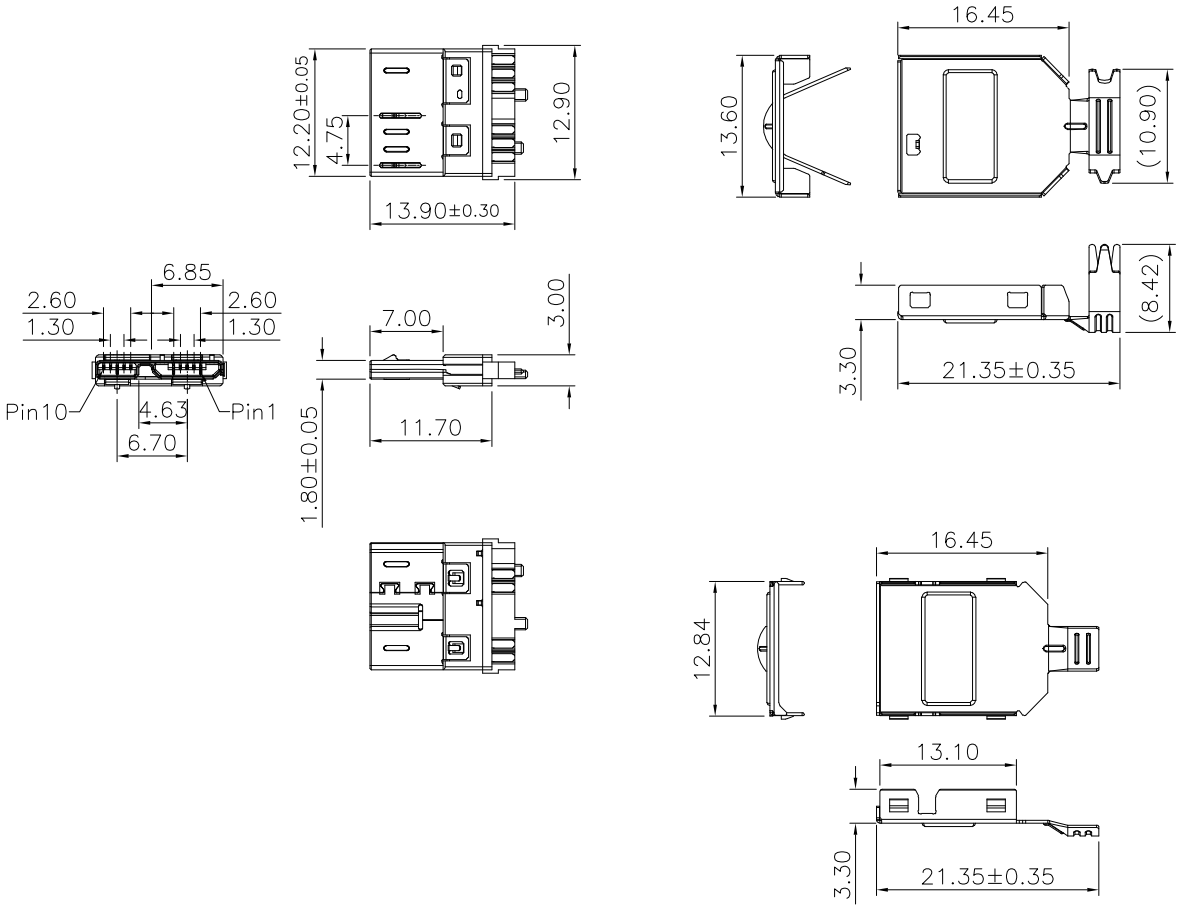

RoHS Compliant

REV	DATE	FILE	BY
	05-FEB-2020		

DRAWN:

CHECKED:

APPROVAL:

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15

UNIT: MM

SCALE:1:1

SHEET: 1 / 1

PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION: Micro USB 3.0,10P,B/M, Solder Assembly Type,15u"

PART NO: 1003-026-22300

SIZE A4