
UNIT:mm

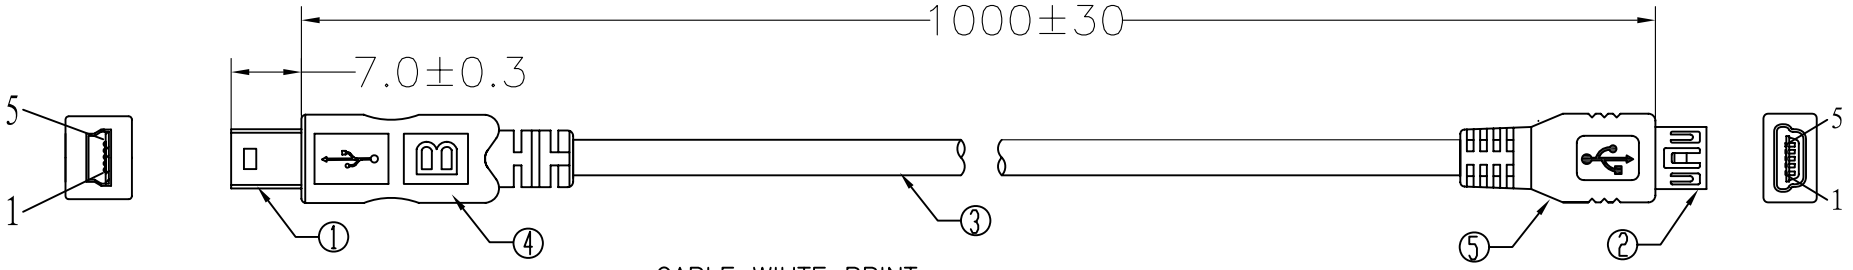



CABLE WIHTE PRINT

USB CABLE E189529 AWM 2725 VW-1 30V 80°C

28AWG/1PR AND 28AWG/2C

PIN ASSIGNMENT:

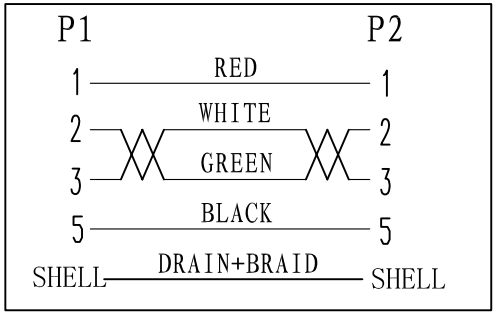

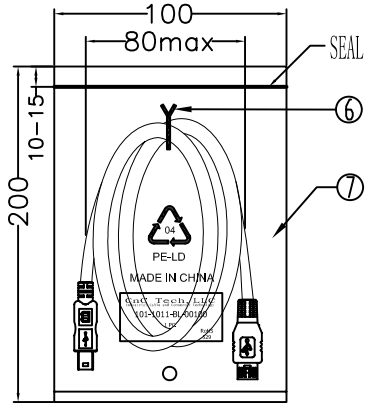

1PC/BAG

Electrical test:
1.100% short,open,miswire test
2.Conduct resistance:2 Ohm(max)
3.Insulation resistance:5Mohm(min)
4.dielectric test:DC 300V

NO.	NAME	Q'TY	SPECIFICATION
⑧	PE BAG	1/10	CLEAR SIZE: 230*300*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑦	PE BAG	1	CLEAR SIZE: 100*200*0.05mm PRINT BLACK"MADE IN CHINA"+1PC"
⑥	TIE	1	BLACK L=80mm
⑤	IN JACKET	1.5g	CLEAR LD-PE (Mould NO.:NM-101)
	OUT JACKET	4.8g	BLACK PVC-40P (MOULD NO:WM-196)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-88)
③	CABLE	1	BLACK USB1.1 UL2725 28#/1P+28#/2C+AEB OD:3.8mm L=1000±10
②	CONN	1	USB MINI 5P FEMALE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK
①	CONN	1set	USB MINI 5P MALE SHELL:NICKEL PIN:G/F 3PCS INSULATOR COLOR:BLACK

CnC Tech, LLC

Industrial Cable and Connector Technology

DRAWED	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1011-BL-00100
DECIDED		DATE	2012-02-17
VERSIONS/EDITEON	A/0	PROJECTION	