
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

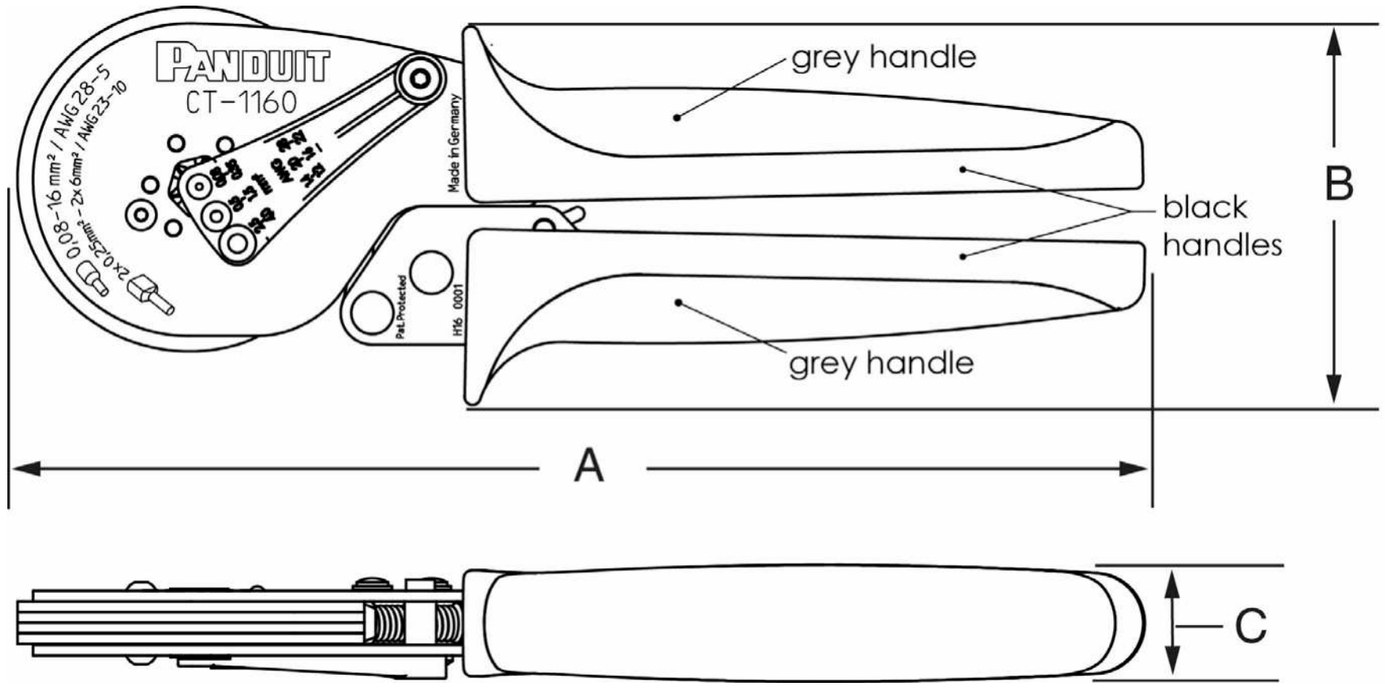

CT-1160 TOOL SHOWN

NOTES, UNLESS OTHERWISE SPECIFIED:

SPECIFICATIONS:
PANDUIT TOOL NO: CT-1160 and CT-1170

- CT-1160 Controlled Cycle Ferrule Crimp Tool

Crimps ferrule with Hexagon profile for 28-5 AWG (0,08 - 16 mm2) insulated and non-insulated single wire ferrules and 23-10 AWG (2 x 0.25mm2 - 2x 6mm2) insulated twin ferrules. CT-1160 uses a grey locator as identifier for hex profile terminations.

- CT-1170 Controlled Cycle Ferrule Crimp Tool

Crimps ferrule with Square profile for 28-5 AWG (0,08 - 16 mm2) insulated and non-insulated single wire ferrules and 23-10 AWG (2 x 0.25mm2 - 2x 6mm2) insulated twin ferrules. CT-1170 uses a black locator as identifier for square profile terminations.

TOOL WEIGHT: (WITHOUT FERRULES) 17.6 oz (0,50kg)

THIS TOOL'S FEATURES INCLUDE:

- Easy handling
- Integrated, releasable ratchet guarantees complete crimping
- Ergonomically developed soft-grips with slip-off protection
- Integral (and reversible) ferrule locator for easy crimping

Fully recyclable
RoHS Directive 2011/65/EU compliant

DIMENSIONS SHOWN ARE FOR BOTH THE CT-1160 and CT-1170 TOOLS; AND ARE FOR REFERENCE ONLY.
DIMENSIONS IN PARENTHESES ARE (MM) METRIC.

A = 8.50	(215)	OVERALL LENGTH
B = 2.95	(75)	OVERALL HEIGHT
C = 0.75	(19)	OVERALL DEPTH

File Location: Teamcenter

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	9-07-16	BLR	BJPU	JADE	RELEASED	10218

CT-1160 and CT-1170 TOOL

CUSTOMER DRAWING

ITEM REVISION NAME: TF28186B01_00

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.x) ± --- (.xxx) ± ---
(.xx) ± --- ANGLES ± ---
THIRD ANGLE PROJECTION

MATERIAL: ---

DRAWING NUMBER: TF28186B01

DRAWN BY:	DATE:	CHK	SCALE	SHT 1 OF 1	SIZE
BLR	9-07-16	BJPU	NONE		B