
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART NO.	PACKAGE QTY.	MAX BUNDLE DIA	"LENGTH" ±.3 [7]
MLTFC1.5H-CP316	100	1.5"[38]	6.0"[152]
MLTFC2.5H-CP316	100	2.5"[64]	9.0"[229]
MLTFC3.4H-CP316	100	3.4"[86]	12.0"[305]
MLTFC5.4H-CP316	100	5.4"[137]	18.0"[457]



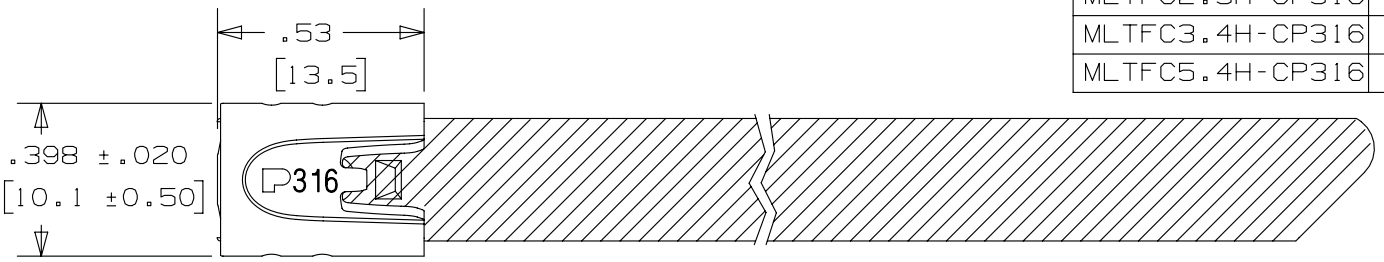

NOTES:

1. APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,HTMT OR ST3MT
2. MINIMUM LOOP TENSILE STRENGTH - 250 LBS. (1112 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [ ] DENOTES DIMENSION IN MILLIMETERS, AND ARE FOR REFERENCE ONLY
4. TOLERANCES:
   .XXX = ±.010 [.25]
   .XX = ±.02 [.5]
   .X = ±.03 [.8]
   ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL
6. COATING - POLYESTER
   COATING THICKNESS: .002 MIN./.005 MAX. PER SIDE

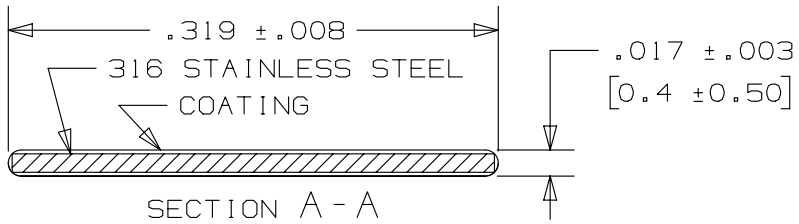

SECTION A-A
SCALE:10×

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	4/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO. ADDED TO NOTE #3: "AND ARE FOR REFERENCE ONLY"	SSECN01051
00A	1/06	JMMR	SKB	---	DRAWING RELEASED	SS00143

TITLE

METAL LOCKING TIE - COATED HEAVY SERIES

CUSTOMER DRAWING

ITEM REVISION NAME: N41223BS/01

DATASET FILE NAME: N41223BS/01

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: 316 STAINLESS STEEL

DRAWING NUMBER: N41223BS_DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JMMR	1/06	SKB	2:1		A