



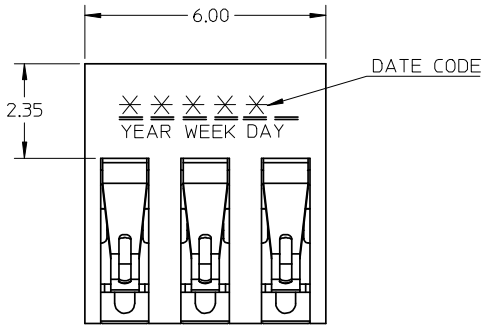


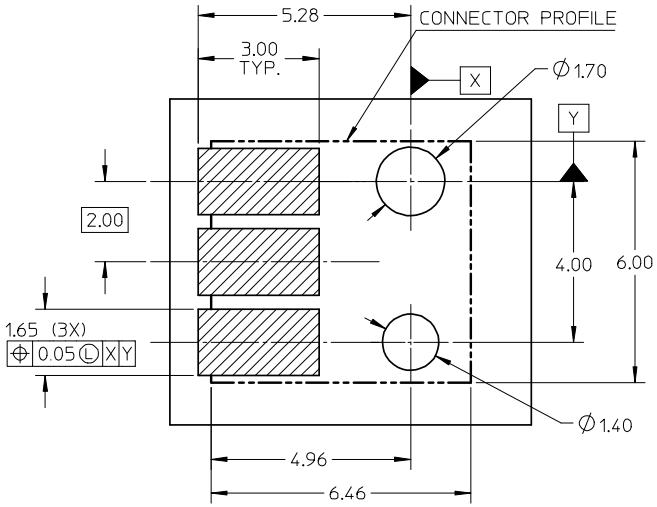


RECOMMENDED FOOT PRINT
TOLERANCE ±0.05

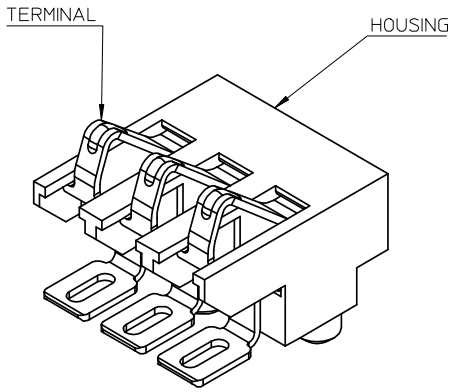

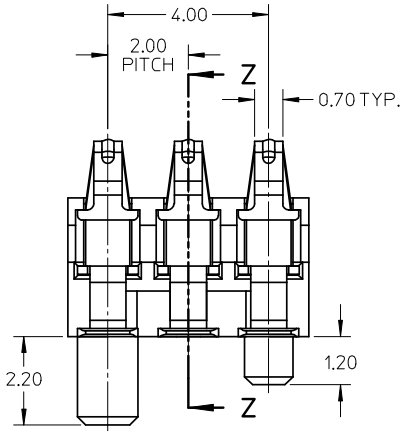

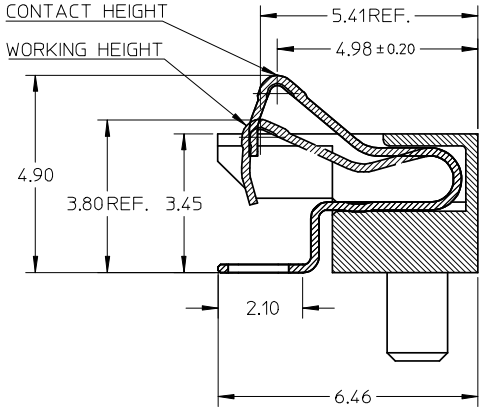

SECTION Z-Z

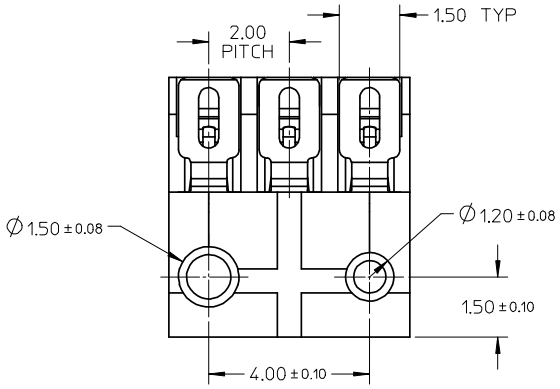

NOTE:
1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMAL PLASTIC. COLOR: BLACK.
TERMINAL: COPPER ALLOY,THICKNESS 0.20MM.
2.FINISH:
CONTACT AREA: 0.75 MICRON GOLD MIN OVER 1.25 MICRON NICKEL MIN.
SOLDER AREA: GOLD FLASH OVER 1.25 MICRON NICKEL MIN.
REST AREA: 1.25 MICRON NICKEL MIN.
3.COPLANARITY: 0.1 MAX AMONG THESE SOLDER TAILS.
4.PRODUCT SPECIFICATION: PS-105040-001

RELEASED	2008/06/06		
EC NO: SH2008-0623	2008/06/06		
DRWN:YWANG91	2008/06/10		
CH'KD:YLZHU			
APPR:HWWANG			
DESCRIPTION			
REV: A			

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.15	± ---
1 PLACE	± 0.2	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	MM ONLY
SCALE	8:1
DESIGN UNITS	METRIC
	THIRD ANGLE PROJECTION
DRAWN BY	YWANG
DATE	2008/03/12
CHECKED BY	YLZHU
DATE	2008/03/12
APPROVED BY	HWWANG
DATE	2008/03/12
MATERIAL NO.	1050400001
DOCUMENT NO.	SD-105040-001
SHEET NO.	1 OF 1
SIZE	A3

TITLE: 2.0MM PITCH 3 CIRCUITS BATTERY CONNECTOR

MOLEX INCORPORATED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION