


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	L ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]
PV10-8FX	#8	M4	1.11 [28,19]	.37 [9,40]	.24 [6,10]	.88 [22,35]	.17 [4,32]
PV10-10FX	#10	M5	1.11 [28,19]	.37 [9,40]	.24 [6,10]	.88 [22,35]	.20 [5,08]
PV10-14FX	1/4"	M6	1.22 [30,99]	.50 [12,7]	.32 [8,13]	.97 [24,64]	.27 [6,86]

NOTES:

1. USED FOR:
 - A. 12-10 AWG [4,0 - 6,0 mm²] SOLID OR STRANDED COPPER WIRE
 - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
 - C. 600V. MAX. BLDG WIRE
(1000 V. MAX. IN SIGNS, FIXTURES & LUMINAIRES)
2. INSTALLATION TOOLS PANDUIT APPROVED:
 - A. UL APPROVED: CT-100, CT-600-A W/CT-550CH, CT-1550, CT-1551,
CT-2500 W/CT-2550CH
3. WIRE STRIP LENGTH: 5/16 ^{+1/32}₀ [7,9 ^{+0,8}₀]
4. MATERIAL:
 - A. STAMPING: .04" [1,02] THK COPPER, TIN PLATED
 - B. HOUSING: VINYL, YELLOW
5. SEE www.panduit.com FOR PACKAGE QUANTITIES
INDICATED BY PART NUMBER SUFFIX
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

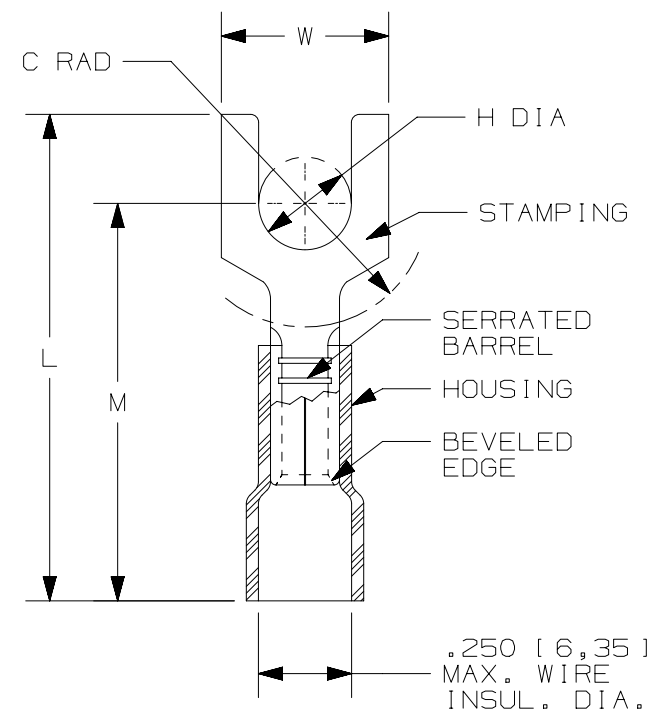


LISTED
587H
E52164



CERTIFIED
LR31212

09	09.13.12	BDK	LCA	VMB	ADDED METRIC EQUIVALENT. CHANGE PACKAGING NOTE. REVISED INSTALLATION TOOLS NOTE. BROUGHT DRAWING TO CURRENT STANDARDS.	A41290
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE					#12-10 BARREL VINYL INSULATED FORK, .250 [6,35] MAX WIRE INSUL. DIA.				
					CUSTOMER DRAWING				
ITEM REVISION NAME									
N41259BB/08									
DATASET FILE NAME									
N41259BB_DC/08A									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .1 [2.54] .XXX ± .005 [.127] .XX ± .01 [.25] ANGLES ± 5 °  THIRD ANGLE PROJECTION					MATERIAL: SEE NOTES DRAWING NUMBER: A41259				
DRAWN BY		DATE		CHK		SCALE		SIZE	
DAW		09.13.12		LA		N.T.S.		SHEET 1 OF 1	
								A	