

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

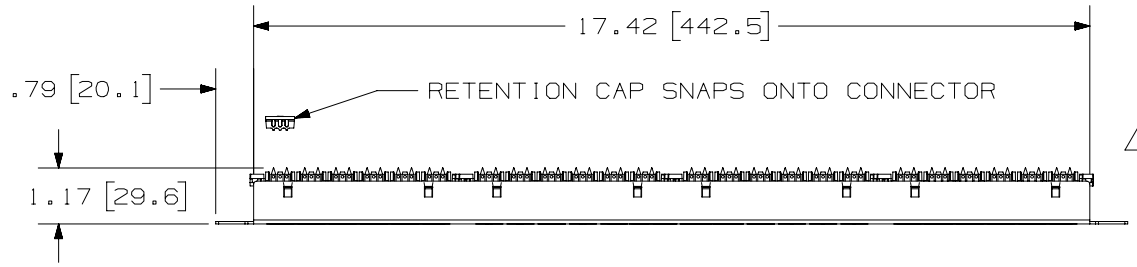

PANDUIT PART NO.	WEIGHT (APPROX.)
DP24688TGY	1.25 lb (567 g)
DP24688TGWH	1.25 lb (567 g)

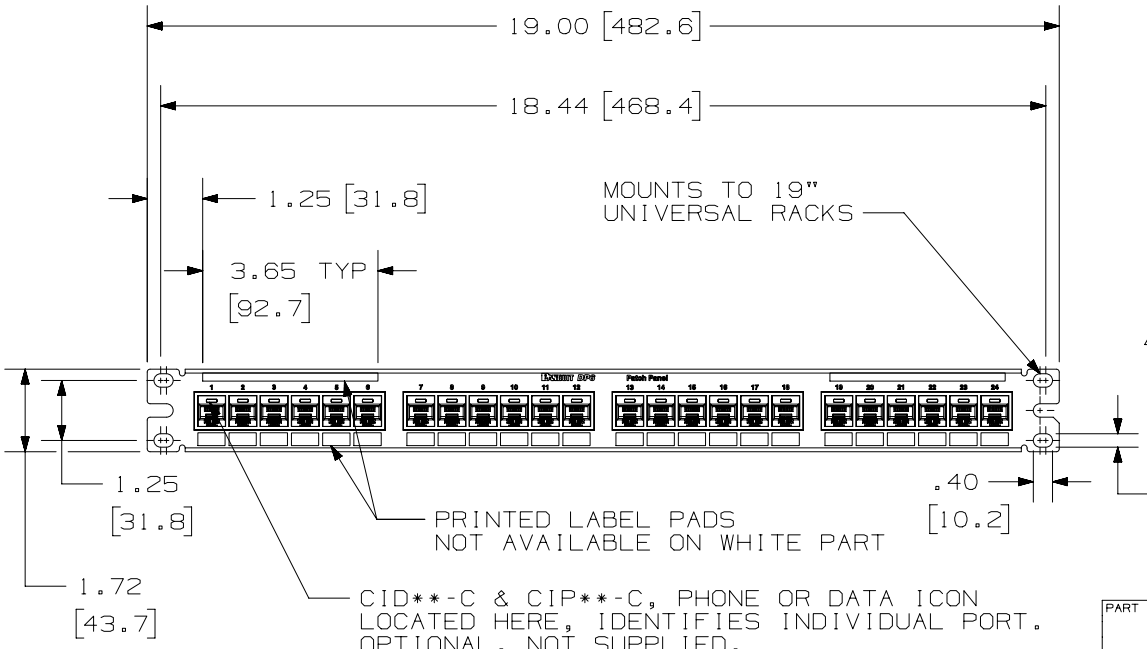

NOTES:
1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
2. MATERIAL:
   PANEL HOUSING: STEEL
   RJ45 MODULE: THERMOPLASTIC RESIN UL94V-0
   PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
   BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
   RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
3. 24 PORT PATCH PANEL 8 POSITION 8 WIRE.
4. THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
5. FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
6. DIMENSIONS IN [ ] ARE IN METRIC.
7. USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
8. RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
2	5-4-18	BAME	KRKE	MMR	B. ADDED P/N DP24688TGWH; C. REMOVED M6 SCREWS	M09000HW
1	6/18/14	JSP	REFR	MMR	A. REVISED DRAWING TITLE BLOCK.	02479-242
R	3-6-06	LZ	CEF	CEF	RELEASED TO PRODUCTION	02479-242

PART NUMBER: DP24688TGY; DP24688TGWH

TITLE: DP6 PLUS 24 PORT PATCH PANEL

CUSTOMER DRAWING

ITEM REVISION NAME: M02479JF/01

DATASET FILE NAME: M02479JF_DC242/01A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ± .010 [.3]
.XX ± .03[.8] ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL:

DRAWING NUMBER: 02479-242

DRAWN BY	DATE	CHK	SCALE	SIZE
LZ	3-4-06	CEF	NONE	A

SHT 1 OF 1

D10100DA/14