


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	DIMENSIONS in. [mm]					TOOLS
		L ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]	
PV10-6LF	#6	1.03 [26,2]	.30 [7,6]	.23 [5,8]	.80 [20,3]	.14 [3,6]	CT-100A CT-600A (CT-550CH) CT-1550 CT-1551 CT-2500 (CT-2550CH)
PV10-8LF	#8	1.05 [26,7]	.30 [7,6]	.23 [5,8]	.80 [20,3]	.16 [4,1]	
PV10-10LF	#10	1.04 [26,4]	.34 [8,6]	.23 [5,8]	.80 [20,3]	.19 [4,8]	
PV10-14LF	1/4"	1.19 [30,2]	.46 [11,7]	.36 [9,1]	.90 [22,9]	.25 [6,4]	

NOTES:

- cULus LISTED FOR:
 - #12-10 AWG [4,0-6,0 mm²] STRANDED COPPER WIRE
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
 - 600 V. MAX. VOLTAGE RATING
(1000 V. IN SIGNS, FIXTURES & LUMINARIES)
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- MATERIAL:
 - STAMPING: .04" [1,0] THK COPPER, TIN PLATED
 - HOUSING: VINYL, YELLOW
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- WIRE STRIP LENGTH: 5/16" ^{+1/32}₋₀ [7,9^{+0,8}₋₀]

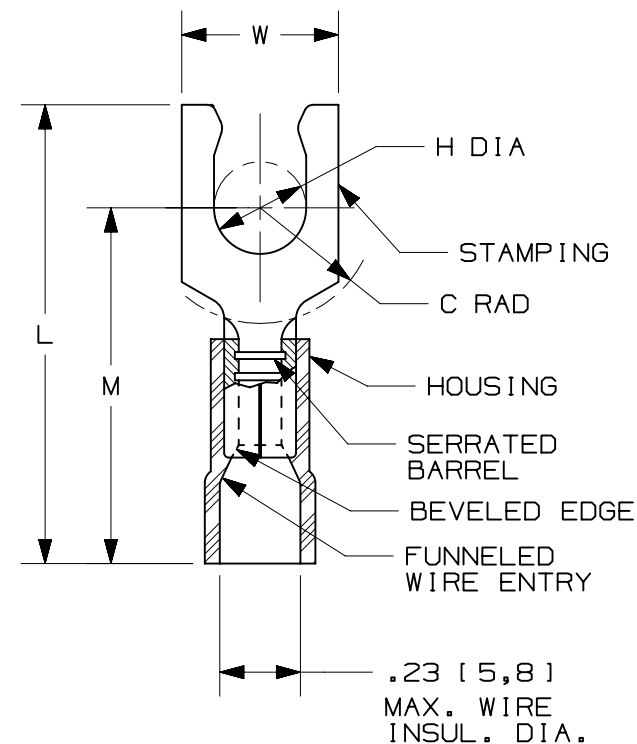

LISTED
587H
E52164

TITLE						LOCKING FORK TERMINALS, NON- INSULATED, #12-10		
						CUSTOMER DRAWING		
ITEM REVISION NAME						N41226BA/12		
DATASET FILE NAME						N41226BA_DC/12A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]						MATERIAL: SEE NOTES		
.X ± .XX ± 						DRAWING NUMBER: A41226		
.XXX ± ANGLES ± THIRD ANGLE PROJECTION						SHEET 1 OF 1		
DRAWN BY						DAW		
DATE						-		
CHK						LA		
SCALE						N.T.S.		
SIZE						A		