





Specifications:
Current Rating:5A AC/DC
Voltage Rating:60V AC/DC
Contact Resistance:5m ohm. Max.
Insulation Resistance:100M ohm. Min.
Withstanding Voltage:500V AC/Minute
Waterproof rate:IP68
Operating Temperature Range:−40°C ~ +100°C
Material and Finish
See Table






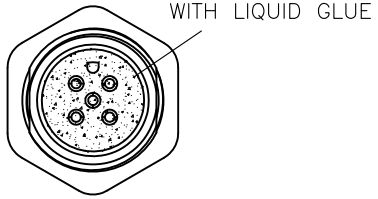



section A−A



PG9 Recommended
Panel CUT-Out
Thickness:4.0mm

PIN ASSIGNMENTS FRONT VIEW

B

A CODING	3Pin	4Pin	5Pin	8Pin	12Pin
					

ITEM	DESCRIPTION	MATERIAL	REMARK	Q'TY
1	Insulator	Nylon	UL94V−0 Black	1
2	Terminal	Copper Alloy	Gold Plated 3u"	3~8
3	Shell	Copper Alloy	Nickel Plated 60u"	1
4	Seal ring	Silica Gel	Red	2
5	Nut	Copper Alloy	PG9 Nickel Plated 60u"	1

RoHS Compliant

REV	DATE	FILE	BY

DRAWN:

CHECKED:

APPROVAL:

GENERAL TOLERANCE:
.X=±0.30
.XX=±0.2

UNIT: MM

SCALE: 1:1

SHEET: 1 / 1

PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION:
M12 A CODE SOCKET SOLDER TYPE

PART NO:
11072F-XX-2-1-1

SIZE
A4