DESCRIPTION: 0.085 RIBBON - SOLDER CUP

DIMENSIONS(mm)			
SIZE	A±0.38	B±0.25	C±0.25
14	44.00	25.50	36.00
24	54.70	36.20	46.70
36	67.70	49.00	59.70
50	82.70	64.50	74.70


SPECIFICATIONS:


ELECTRICAL:

CURRENT RATING:	1 AMPS
INSULATION RESISTANCE:	1,000 MΩ MIN. @ 500 VDC
DIELECTRIC WITHSTANDING VOLTAGE:	1,000 VAC FOR 1 MINUTE
CONTACT RESISTANCE:	30 mΩ MAX.
OPERATING TEMPERATURE:	-55°C TO +105°C

MATERIALS:

INSULATION:	PBT, UL94 V-0 RATED
CONTACTS:	PHOSPHOR BRONZE
CONTACT PLATING:	GOLD FLASH IN MATING AREA BRIGHT TIN IN SOLDER AREA
SHELL:	STEEL, NICKEL PLATED

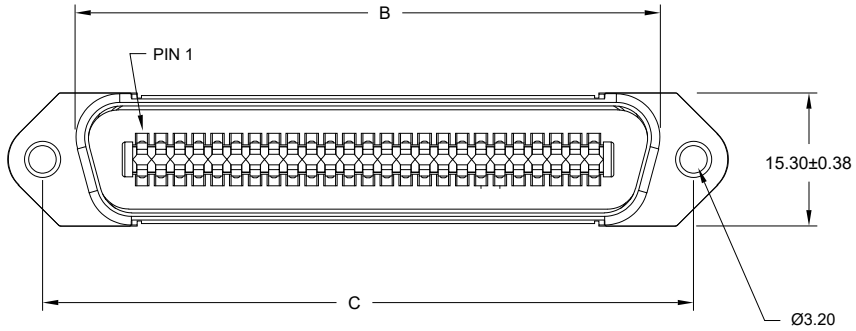

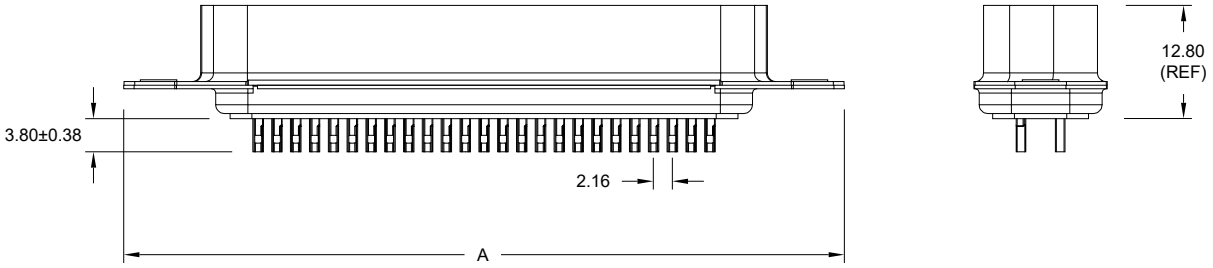

111-YYY-1 0 3 L 00 1

- SERIES
- POSITIONS
  - 014
  - 024
  - 036
  - 050
- GENDER
  - 1 = MALE
- TERMINATION
  - 0 = SOLDER CUP
- SHELL PLATING
  - 3 = NICKEL
- HARDWARE
  - 00 = NO HARDWARE
- PLATING
  - 1 = GOLD FLASH

WILL ACCEPT 26-20 AWG WIRE

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: WAYNE ROBBINS

DATE: 01/16/2019

NorComp


SCALE: NTS

SHEET 1 OF 2


REV 16

DWG NO. 111-YYY-103L001


DESCRIPTION: 0.085 RIBBON - SOLDER CUP

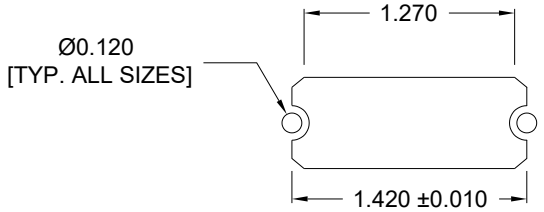


14 POSITION

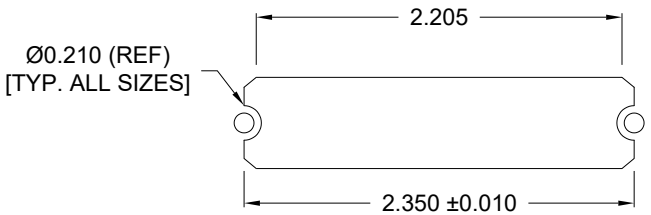

36 POSITION

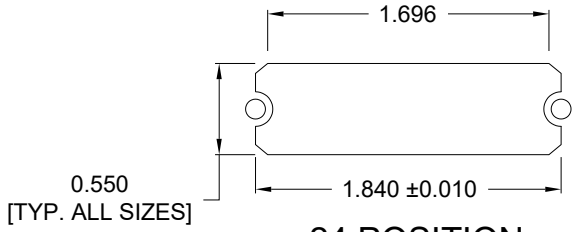

24 POSITION

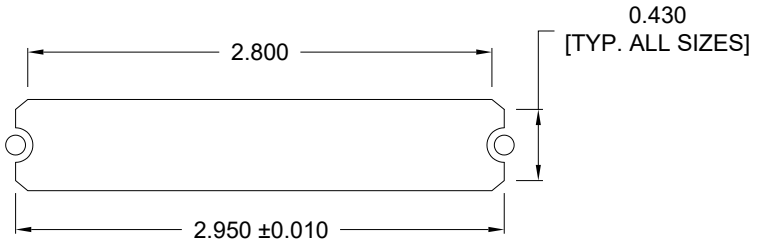

50 POSITION

RoHS COMPLIANT

UNITS = inch

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	SCALE:	SHEET	OF	REV
WAYNE ROBBINS	NTS	2	2	16
DATE: 01/16/2019	DWG NO. 111-YYY-103L001			

NorComp