
DESCRIPTION: 0.085 RIBBON - DIP SOLDER

DIMENSIONS(mm)			
SIZE	A±0.38	B±0.25	C±0.25
14	44.00	36.00	25.20
24	54.90	46.70	35.90
36	67.70	59.70	48.70
50	82.70	74.70	64.20

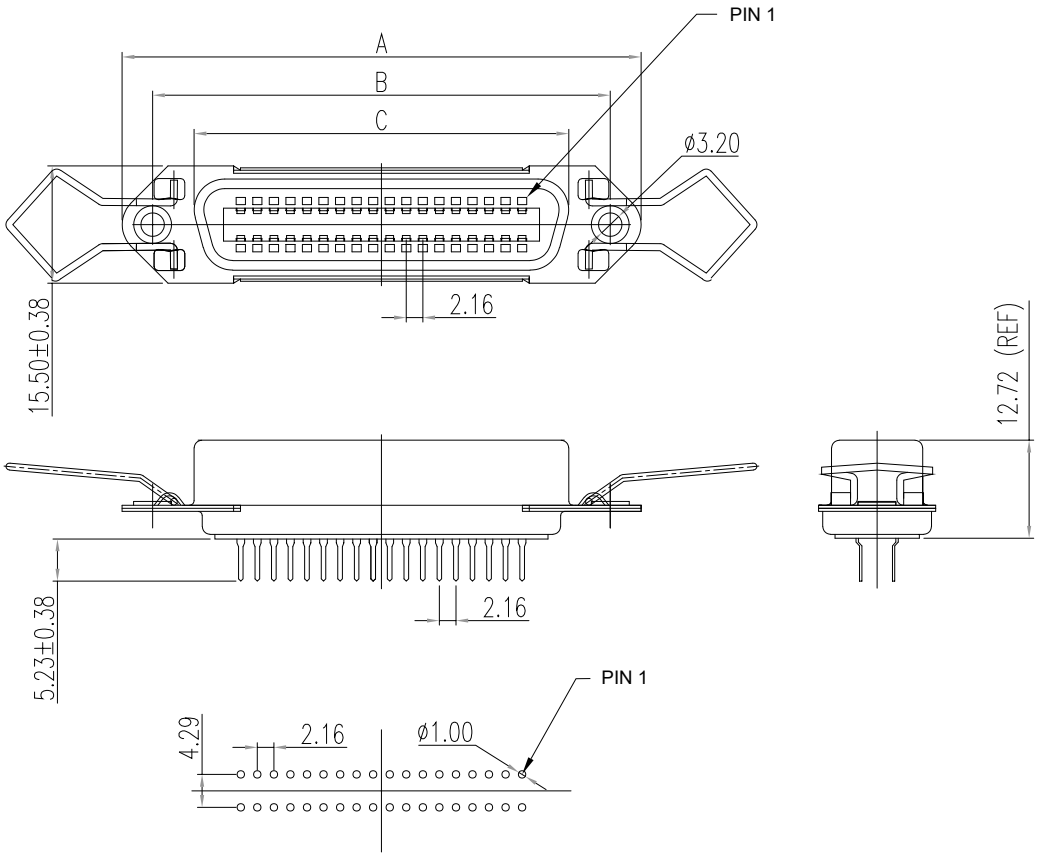

RECOMMENDED P.C.B LAYOUT
36P SHOWN

SPECIFICATIONS:

ELECTRICAL:

CURRENT RATING:	1 AMPS
INSULATION RESISTANCE:	1,000 MΩ MIN. @ 500 VDC
DIELECTRIC WITHSTANDING VOLTAGE:	1,000 VAC FOR 1 MINUTE
CONTACT RESISTANCE:	30 mΩ MAX.
OPERATING TEMPERATURE:	-55°C TO +105°C

MATERIALS:

INSULATION:	PBT, UL94 V-0 RATED
CONTACTS:	PHOSPHOR BRONZE
CONTACT PLATING:	GOLD FLASH IN MATING AREA BRIGHT TIN IN SOLDER AREA
SHELL:	STEEL, NICKEL PLATED

111-YYY-2 1 3 L 00 1

- SERIES
- POSITIONS
  - 014
  - 024
  - 036
  - 050
- GENDER
  - 2 = FEMALE
- TERMINATION
  - 1 = DIP SOLDER
- SHELL PLATING
  - 3 = NICKEL
- HARDWARE
  - 00 = NO HARDWARE
- PLATING
  - 1 = GOLD FLASH

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: WAYNE ROBBINS

DATE: 09/15/2005

NorComp


SCALE: NTS

SHEET 1 OF 2


REV 12

DWG NO. 111-YYY-213L001


DESCRIPTION: 0.085 RIBBON - DIP SOLDER - BOARD CUT OUT

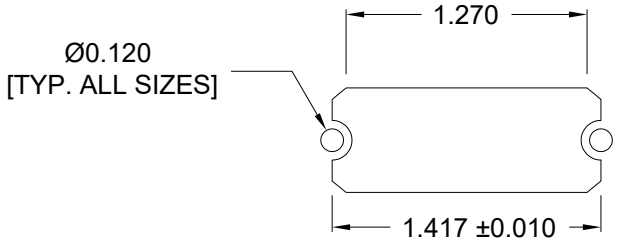


14 POSITION

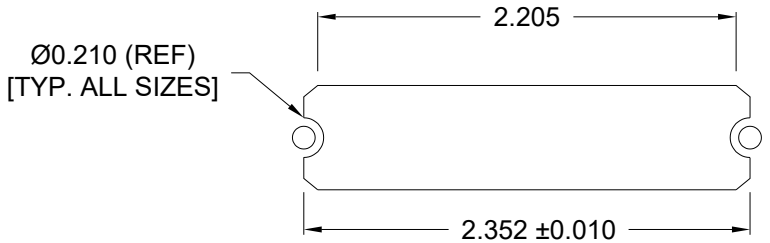

36 POSITION

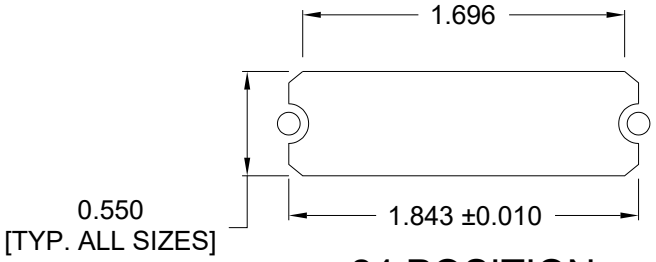

24 POSITION

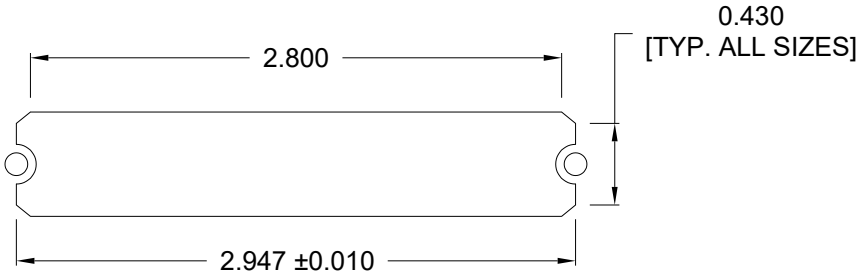

50 POSITION

RoHS COMPLIANT

UNITS = inches

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	DATE:
WAYNE ROBBINS	09/15/2005

NorComp

SCALE:	SHEET	OF	REV
NTS	2	2	12

DWG NO. 111-YYY-213L001