# SNx5HVD08 Wide Supply Range RS-485 Transceiver

## 1 Features

- Operates with a 3-V to 5.5-V supply
- Consumes less than 90-mW Quiescent power
- Open-circuit, short-circuit, and idle-bus failsafe receiver
- 1/8$^{th}$ Unit-load (up to 256 nodes on the bus)
- Bus-pin ESD protection exceeds 16-kV HBM
- Driver output voltage slew-rate limited for optimum signal quality at 10 Mbps
- Electrically compatible with ANSI TIA/EIA-485 standard

## 2 Applications

- Data transmission with remote stations powered from the host
- Isolated multipoint data buses
- Industrial process control networks
- Point-of-sale networks
- Electric utility metering

## 3 Description

The SN65HVD08 combines a 3-state differential line driver and differential line receiver designed for balanced data transmission and interoperation with ANSI TIA/EIA-485-A and ISO-8482E standard-compliant devices.


The wide supply voltage range and low quiescent current requirements allow the SN65HVD08s to operate from a 5-V power bus in the cable with as much as a 2-V line voltage drop. Busing power in the cable can alleviate the need for isolated power to be generated at each connection of a ground-isolated bus.

The driver differential outputs and receiver differential inputs connect internally to form a differential input/output (I/O) bus port that is designed to offer minimum loading to the bus whenever the driver is disabled or not powered. The drivers and receivers have active-high and active-low enables respectively, which can be externally connected together to function as a direction control.

**Package Information**

| PART NUMBER | PACKAGE(1) | BODY SIZE (NOM) |
|---|---|---|
| SN75HVD08, SN65HVD08 | SOIC (8) | 4.90 mm × 3.91 mm |
| | PDIP (8) | 9.81 mm × 6.35 mm |

(1) For all available packages, see the orderable addendum at the end of the datasheet.

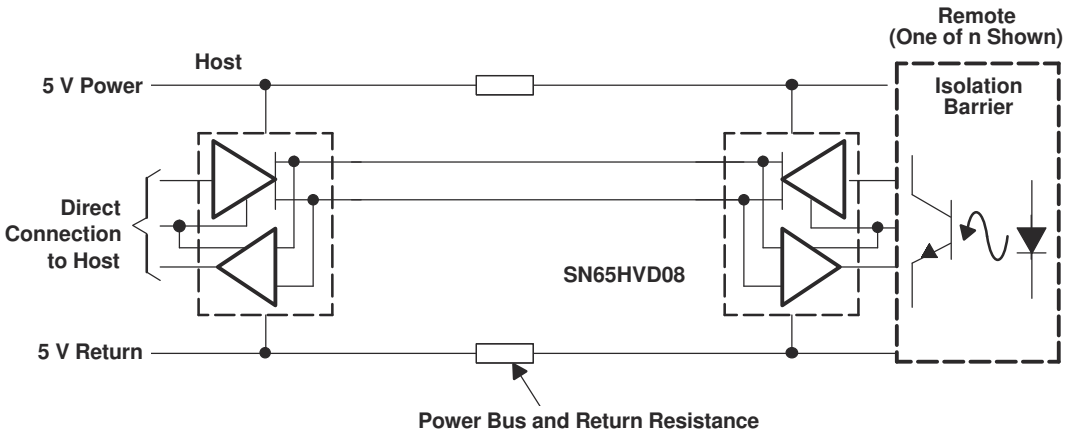


**Typical Application Schematic**

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

# Table of Contents

**1 Features**....1
**2 Applications**....1
**3 Description**....1
**4 Revision History**....2
**5 Pin Configuration and Functions**....3
**6 Specifications**....3
6.1 Absolute Maximum Ratings....3
6.2 ESD Ratings....3
6.3 Recommended Operating Conditions....4
6.4 Thermal Information....4
6.5 Electrical Characteristics....4
6.6 Driver Switching Characteristics....5
6.7 Receiver Switching Characteristics....5
6.8 Typical Characteristics....7
**7 Parameter Measurement Information**....8
**8 Detailed Description**....12
8.1 Overview....12
8.2 Functional Block Diagram....12
8.3 Feature Description....12
8.4 Device Functional Modes....12
**9 Application and Implementation**....14
9.1 Application Information....14
9.2 Typical Application....17
9.3 Power Supply Recommendations....20
9.4 Layout....20
**10 Device and Documentation Support**....21
10.1 Device Support....21
10.2 Support Resources....21
10.3 Trademarks....21
10.4 Electrostatic Discharge Caution....21
10.5 Glossary....21
**11 Mechanical, Packaging, and Orderable Information**....21

## 4 Revision History

**Changes from Revision D (March 2015) to Revision E (February 2023)** **Page**

- Changed the *Thermal Information* table....4
- Changed the *Typical Characteristics* ....7

**Changes from Revision C (July 2006) to Revision D (March 2015)** **Page**

- Added *Pin Configuration and Functions* section, *ESD Ratings* table, *Feature Description* section, *Device Functional Modes*, *Application and Implementation* section, *Power Supply Recommendations* section, *Layout* section, *Device and Documentation Support* section, and *Mechanical, Packaging, and Orderable Information* section ....1


Copyright © 2023 Texas Instruments Incorporated

# 5 Pin Configuration and Functions





**Figure 5-1. D or P Package, 8-Pin SOIC or PDIP (Top View)**

**Table 5-1. Pin Functions**

| PIN | | TYPE | DESCRIPTION |
|---|---|---|---|
| NAME | NO. | | |
| A | 6 | Bus input / output | Driver output and receiver input (complementary to B) |
| B | 7 | Bus input / output | Driver output and receiver input (complementary to A) |
| D | 4 | Digital input | Driver data input |
| DE | 3 | Digital input | Driver enable high |
| GND | 5 | Reference potential | Local device ground |
| R | 1 | Digital output | Receive data output |
| $\overline{RE}$ | 2 | Digital input | Receiver enable low |
| $V_{CC}$ | 8 | Supply | 3-V to 5.5-V supply |

# 6 Specifications

## 6.1 Absolute Maximum Ratings

over operating free-air temperature range unless otherwise noted(1) (2)

| | MIN | MAX | UNIT |
|---|---|---|---|
| Supply voltage, $V_{CC}$ | –0.3 | 6 | V |
| Voltage at A or B | –9 | 14 | V |
| Input voltage at D, DE, R or $\overline{RE}$ | –0.5 | $V_{CC}$ + 0.5 | V |
| Voltage input, transient pulse, A and B, through 100 Ω | –25 | 25 | V |
| Receiver output current, $I_O$ | –11 | 11 | mA |
| Maximum Junction Temperature, $T_J$ | | 150 | °C |
| Storage Temperature, $T_{STG}$ | –65 | 150 | °C |

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) All voltage values, except differential I/O bus voltages, are with respect to network ground terminal.

## 6.2 ESD Ratings

| | | | | VALUE | UNIT |
|---|---|---|---|---|---|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001(1) | A, B, and GND | 16000 | V |
| | | | All pins | 4000 | |
| | | Charged-device model (CDM), per JEDEC specification JESD22-C101(2) | | 1000 | |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Copyright © 2023 Texas Instruments Incorporated

## 6.3 Recommended Operating Conditions

| | | MIN | NOM | MAX | UNIT |
|---|---|---|---|---|---|
| Supply voltage, $V_{CC}$ | | 3 | | 5.5 | V |
| Input voltage at any bus terminal (separately or common mode), $V_I$ (1) | | –7 | | 12 | V |
| High-level input voltage, $V_{IH}$ | Driver, driver enable, and receiver enable inputs | 2.25 | | $V_{CC}$ | V |
| Low-level input voltage, $V_{IL}$ | | 0 | | 0.8 | |
| Differential input voltage, $V_{ID}$ | | –12 | | 12 | |
| High-level output current, $I_{OH}$ | Driver | –60 | | | mA |
| | Receiver | –8 | | | |
| Low-level output current, $I_{OL}$ | Driver | | | 60 | mA |
| | Receiver | | | 8 | |
| Operating free-air temperature, $T_A$ | SN75HVD08 | 0 | | 70 | °C |
| | SN65HVD08 | –40 | | 85 | |

(1) The algebraic convention, in which the least positive (most negative) limit is designated as minimum is used in this data sheet.

## 6.4 Thermal Information

| THERMAL METRIC(1) | | D (SOIC) SN75 Version | D (SOIC) SN65 Version | P (PDIP) | UNIT |
|---|---|---|---|---|---|
| | | 8 PINS | 8 PINS | 8 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 175.4 | 116.7 | 125 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 53.6 | 56.3 | 34.9 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 45.1 | 63.4 | 23.7 | °C/W |
| $\psi_{JT}$ | Junction-to-top characterization parameter | 10.1 | 8.8 | 12.1 | °C/W |
| $\psi_{JB}$ | Junction-to-board characterization parameter | 44.4 | 62.6 | 23.6 | °C/W |

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, SPRA953.

## 6.5 Electrical Characteristics

over recommended operating conditions unless otherwise noted

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|---|---|---|---|---|
| $\lvert V_{OD}\rvert$ | Driver differential output voltage magnitude | $R_L$ = 60 Ω, 375 Ω on each output to -7 V to 12 V, See Figure 7-1 | 1.5 | | $V_{CC}$ | V |
| $\Delta\lvert V_{OD}\rvert$ | Change in magnitude of driver differential output voltage | $R_L$ = 54 Ω | –0.2 | | 0.2 | V |
| $V_{OC(PP)}$ | Peak-to-peak driver common-mode output voltage | Center of two 27-Ω load resistors, See Figure 7-2 | | 0.5 | | V |
| $V_{IT+}$ | Positive-going receiver differential input voltage threshold | | | | –10 | mV |
| $V_{IT-}$ | Negative-going receiver differential input voltage threshold | | –200 | | | mV |
| $V_{hys}$ | Receiver differential input voltage threshold hysteresis($V_{IT+}$ - $V_{IT-}$) | | | 35 | | mV |
| $V_{OH}$ | Receiver high-level output voltage | $I_{OH}$ = -8 mA | 2.4 | | | V |
| $V_{OL}$ | Receiver low-level output voltage | $I_{OL}$ = 8 mA | | | 0.4 | V |
| $I_{IH}$ | Driver input, driver enable, and receiver enable high-level input current | | –100 | | 100 | µA |
| $I_{IL}$ | Driver input, driver enable, and receiver enable low-level input current | | –100 | | 100 | µA |
| $I_{OS}$ | Driver short-circuit output current | 7 V < $V_O$ < 12 V | –265 | | 265 | mA |


Copyright © 2023 Texas Instruments Incorporated

## 6.5 Electrical Characteristics (continued)

over recommended operating conditions unless otherwise noted

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|---|---|---|---|---|
| $I_I$ | Bus input current (disabled driver) | $V_I$ = 12 V | | | 130 | μA |
| | | $V_I$ = -7 V | –100 | | | |
| | | $V_I$ = 12 V, $V_{CC}$ = 0 V | | | 130 | |
| | | $V_I$ = -7 V. $V_{CC}$ = 0 V | –100 | | | |
| $I_{CC}$ | Supply current | Receiver enabled, driver disabled, no load | | | 10 | mA |
| | | Driver enabled, receiver disabled, no load | | | 16 | |
| | | Both disabled | | | 5 | μA |
| | | Both enabled, no load | | | 16 | mA |

## 6.6 Driver Switching Characteristics

over recommended operating conditions unless otherwise noted

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|---|---|---|---|---|
| $t_{PHL}$ | Driver high-to-low propagation delay time | $R_L$ = 54 Ω, $C_L$ = 50 pF,See Figure 7-3 | 18 | | 40 | ns |
| $t_{PLH}$ | Driver low-to-high propagation delay time | | 18 | | 40 | |
| $t_r$ | Driver 10%-to-90% differential output rise time | | 10 | | 55 | |
| $t_f$ | Driver 90%-to-10% differential output fall time | | 10 | | 55 | |
| $t_{SK(P)}$ | Driver differential output pulse skew, $\lvert t_{PHL} - t_{PLH} \rvert$ | | | | 2.5 | |
| $t_{en}$ | Driver enable time | Receiver enabled, See Figures 4 and 5 | | | 55 | ns |
| | | Receiver disabled, See Figures 4 and 5 | | | 6 | μs |
| $t_{dis}$ | Driver disable time | Receiver enabled, See Figures 4 and 5 | | | 90 | ns |

## 6.7 Receiver Switching Characteristics

over recommended operating conditions unless otherwise noted

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|---|---|---|---|---|
| $t_{PHL}$ | Receiver high-to-low propagation delay time | $C_L$ = 15 pF, See Figure 7-6 | | | 70 | ns |
| $t_{PLH}$ | Receiver low-to-high propagation delay time | | | | 70 | |
| $t_r$ | Receiver 10%-to-90% differential output rise time | | | | 5 | |
| $t_f$ | Receiver 90%-to-10% differential output fall time | | | | 5 | |
| $t_{SK(P)}$ | Receiver differential output pulse skew, $\lvert t_{PHL} - t_{PLH} \rvert$ | | | | 4.5 | |
| $t_{en}$ | Receiver enable time | Driver enabled, See Figure 7-7 | | | 15 | ns |
| | | Driver disabled, See Figure 7-8 | | | 6 | μs |
| $t_{dis}$ | Receiver disable time | Driver enabled, See Figure 7-7 | | | 20 | ns |

Copyright © 2023 Texas Instruments Incorporated

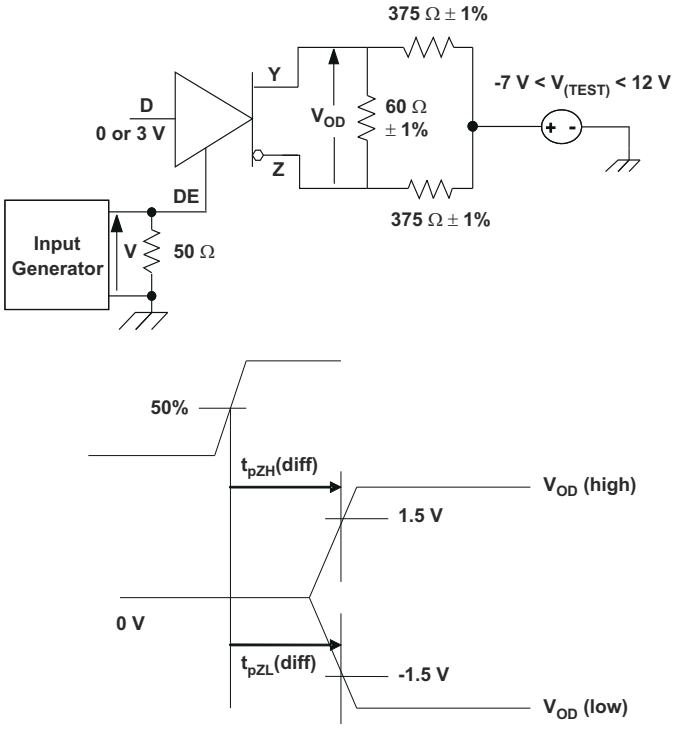



**Figure 6-1. Driver Enable Time From DE to $V_{OD}$**

The time $t_{pZL}(x)$ is the measure from DE to $V_{OD}(x)$. $V_{OD}$ is valid when it is greater than 1.5 V.


Copyright © 2023 Texas Instruments Incorporated

## 6.8 Typical Characteristics

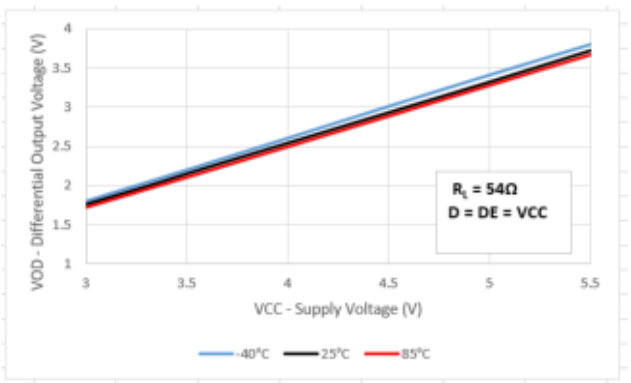



Figure 6-2. Differential Output Voltage vs Supply Voltage

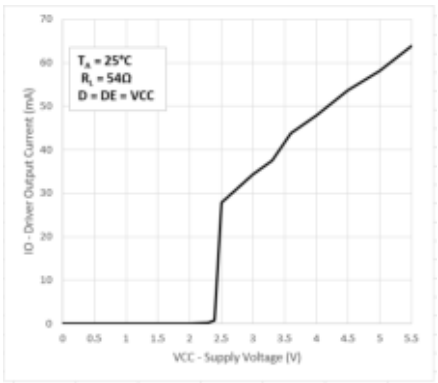



Figure 6-3. Driver Output Current vs Supply Voltage

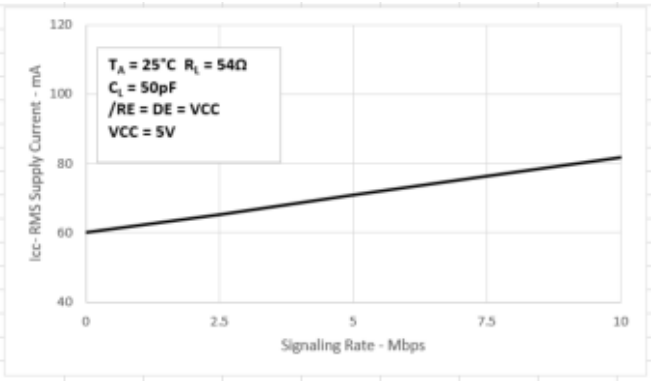



Figure 6-4. RMS Supply Current vs Signaling Rate

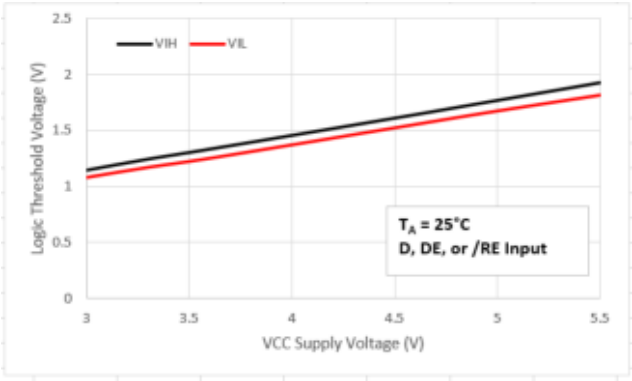



Figure 6-5. Logic Input Threshold Voltage vs Supply Voltage

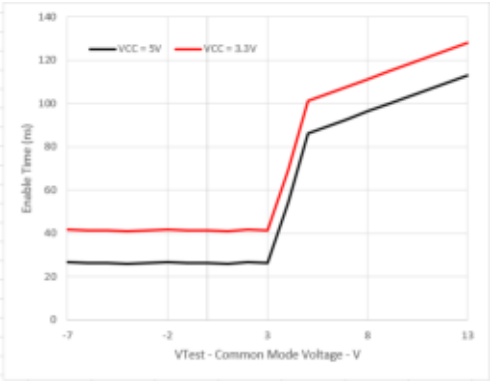



Figure 6-6. Enable Time vs Common-Mode Voltage (See Figure 6-1)

# 7 Parameter Measurement Information



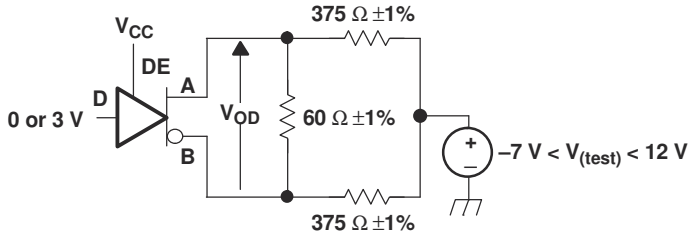



**Figure 7-1. Driver $V_{OD}$ With Common-Mode Loading Test Circuit**

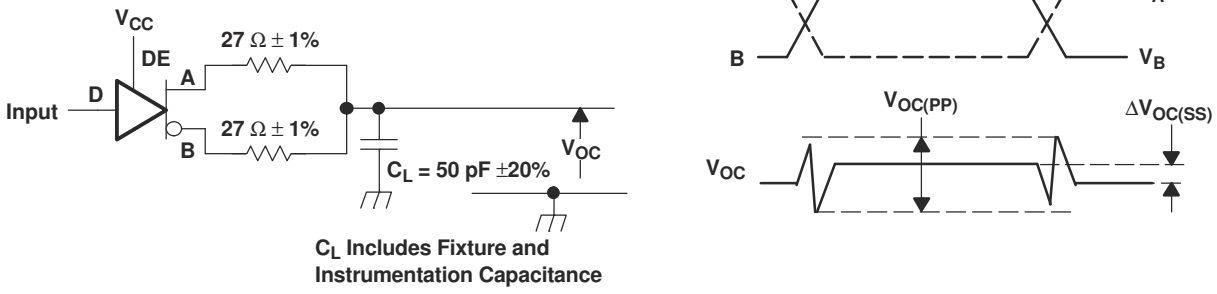



Input: PRR = 500 kHz, 50% Duty Cycle,$t_r$<6ns, $t_f$<6ns, $Z_O$ = 50 Ω

**Figure 7-2. Test Circuit and Definitions for the Driver Common-Mode Output Voltage**

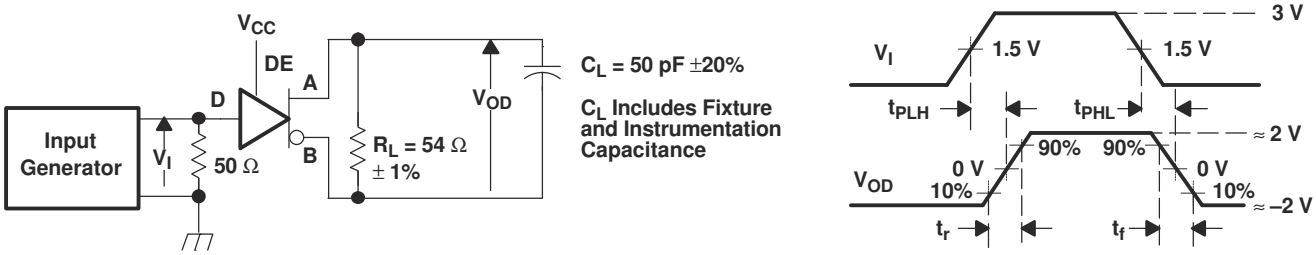


Generator: PRR = 500 kHz, 50% Duty Cycle, $t_r$ <6 ns, $t_f$ <6 ns, $Z_o$ = 50 Ω


**Figure 7-3. Driver Switching Test Circuit and Voltage Waveforms**

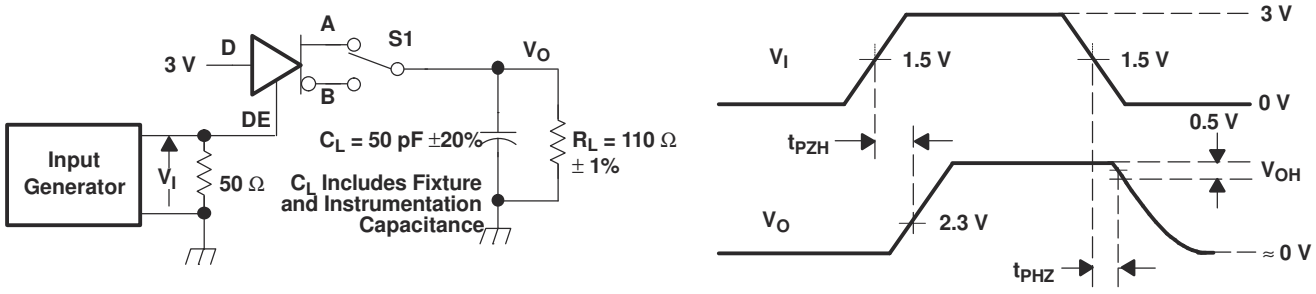


Generator: PRR = 500 kHz, 50% Duty Cycle, $t_r$ <6 ns, $t_f$ <6 ns, $Z_o$ = 50 Ω


**Figure 7-4. Driver High-Level Enable and Disable Time Test Circuit and Voltage Waveforms**


Copyright © 2023 Texas Instruments Incorporated

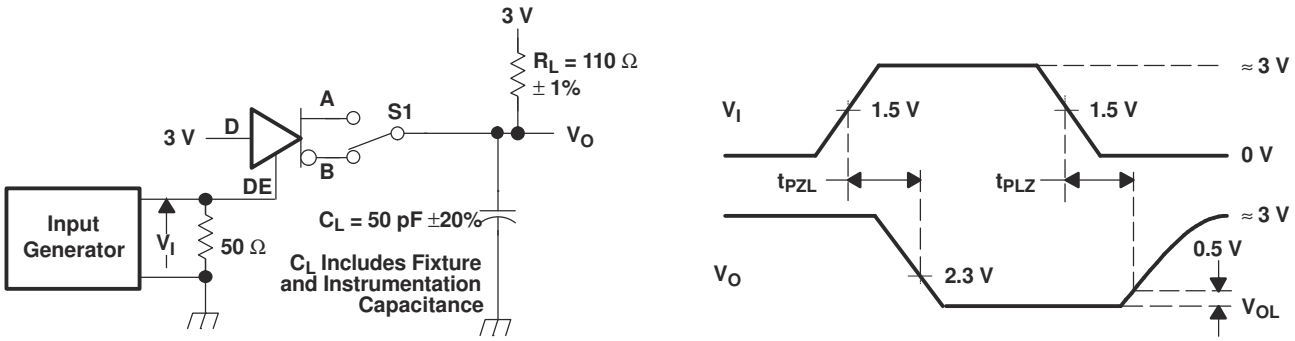


Generator: PRR = 500 kHz, 50% Duty Cycle, $t_r$ <6 ns, $t_f$ <6 ns, $Z_o$ = 50 Ω

**Figure 7-5. Driver Low-Level Output Enable and Disable Time Test Circuit and Voltage Waveforms**

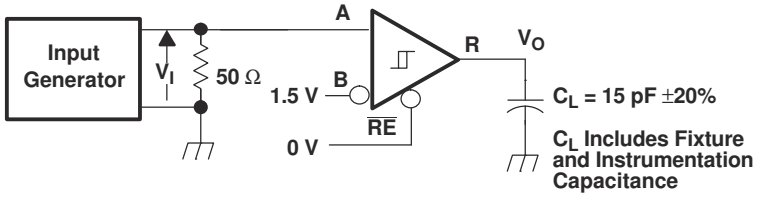


Generator: PRR = 500 kHz, 50% Duty Cycle, $t_r$ <6 ns, $t_f$ <6 ns, $Z_o$ = 50 Ω

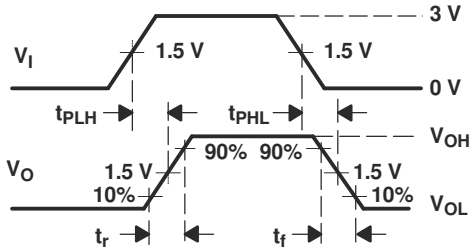



**Figure 7-6. Receiver Switching Test Circuit and Voltage Waveforms**

Copyright © 2023 Texas Instruments Incorporated

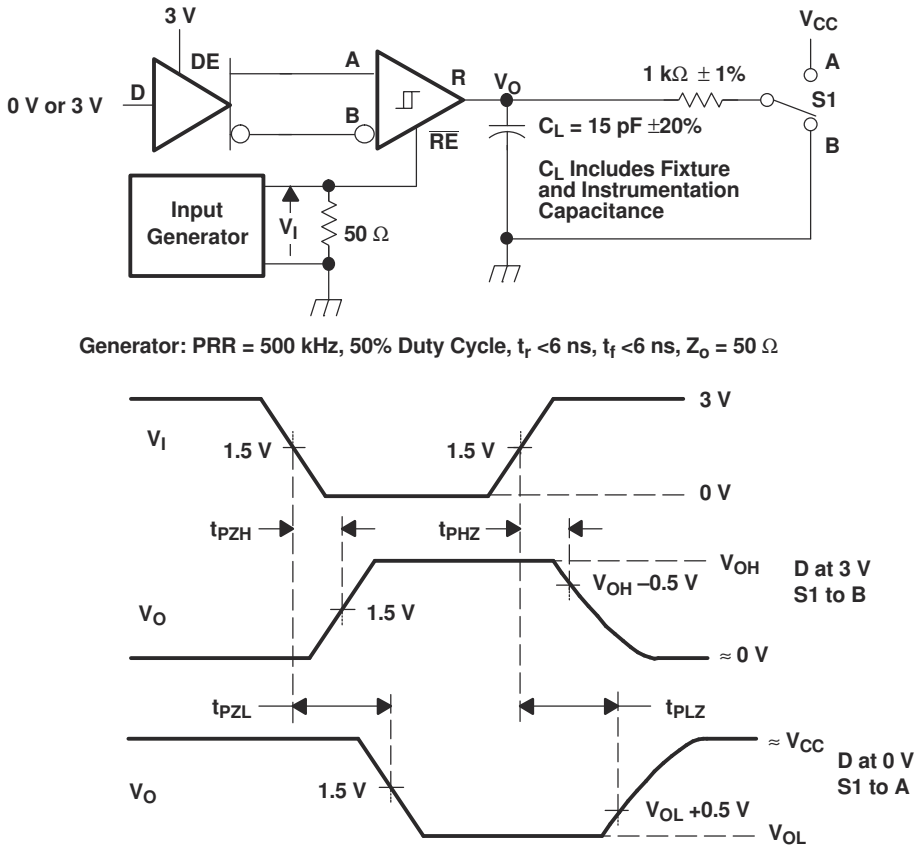



**Figure 7-7. Receiver Enable and Disable Time Test Circuit and Voltage Waveforms With Drivers Enabled**


Copyright © 2023 Texas Instruments Incorporated

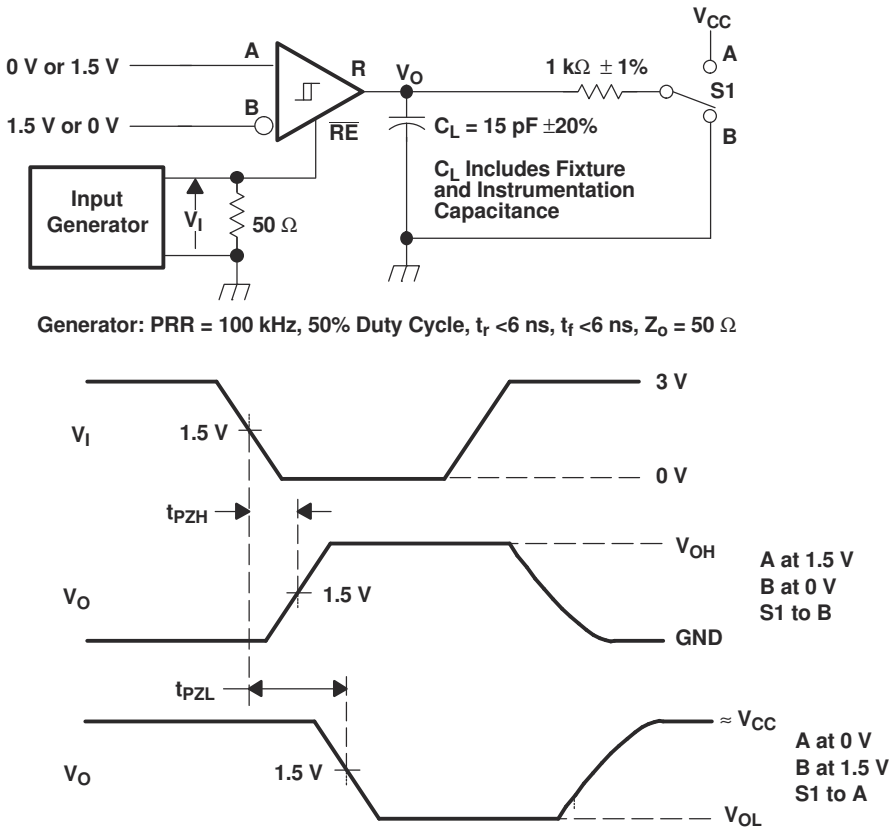



**Figure 7-8. Receiver Enable Time From Standby (Driver Disabled)**

# 8 Detailed Description

## 8.1 Overview

The SNx5HVD08 is a 3-V to 5.5-V, half-duplex, RS-485 transceiver suitable for data transmission up to 10 Mbps.

This device has an active-high driver enable and active-low receiver enable. A standby current of less than 5 µA can be achieved by disabling both driver and receiver.

Device operation is specified over a wide temperature range from -40°C to +85°C.

## 8.2 Functional Block Diagram





**Figure 8-1. Logic Diagram (Positive)**

## 8.3 Feature Description

Internal ESD protection circuits protect the transceiver bus terminals against ±16 kV Human Body Model (HBM) electrostatic discharges and all other pins up to ±4 kV.

The SNx5HVD08 provides internal biasing of the receiver input thresholds for open-circuit, bus-idle, or short-circuit failsafe conditions, and a typical receiver hysteresis of 35 mV.

## 8.4 Device Functional Modes

**Table 8-1. Function Table: Driver**

| INPUT | ENABLE | OUTPUTS | |
|---|---|---|---|
| D | DE | A | B |
| H | H | H | L |
| L | H | L | H |
| X | L | Z | Z |
| Open | H | H | L |

**Table 8-2. Function Table: Receiver**

| DIFFERENTIAL INPUTS | ENABLE(1) | OUTPUT(1) |
|---|---|---|
| $V_{ID} = V_A - V_B$ | $\overline{RE}$ | R |
| $V_{ID} \leq$ -0.2 V | L | L |
| -0.2 V < $V_{ID}$ < -0.01 V | L | ? |
| -0.01 V ≤ $V_{ID}$ | L | H |
| X | H | Z |
| Open Circuit | L | H |
| Short Circuit | L | H |

(1) H = high level; L = low level; Z = high impedance; X = irrelevant; ? = indeterminate


Copyright © 2023 Texas Instruments Incorporated

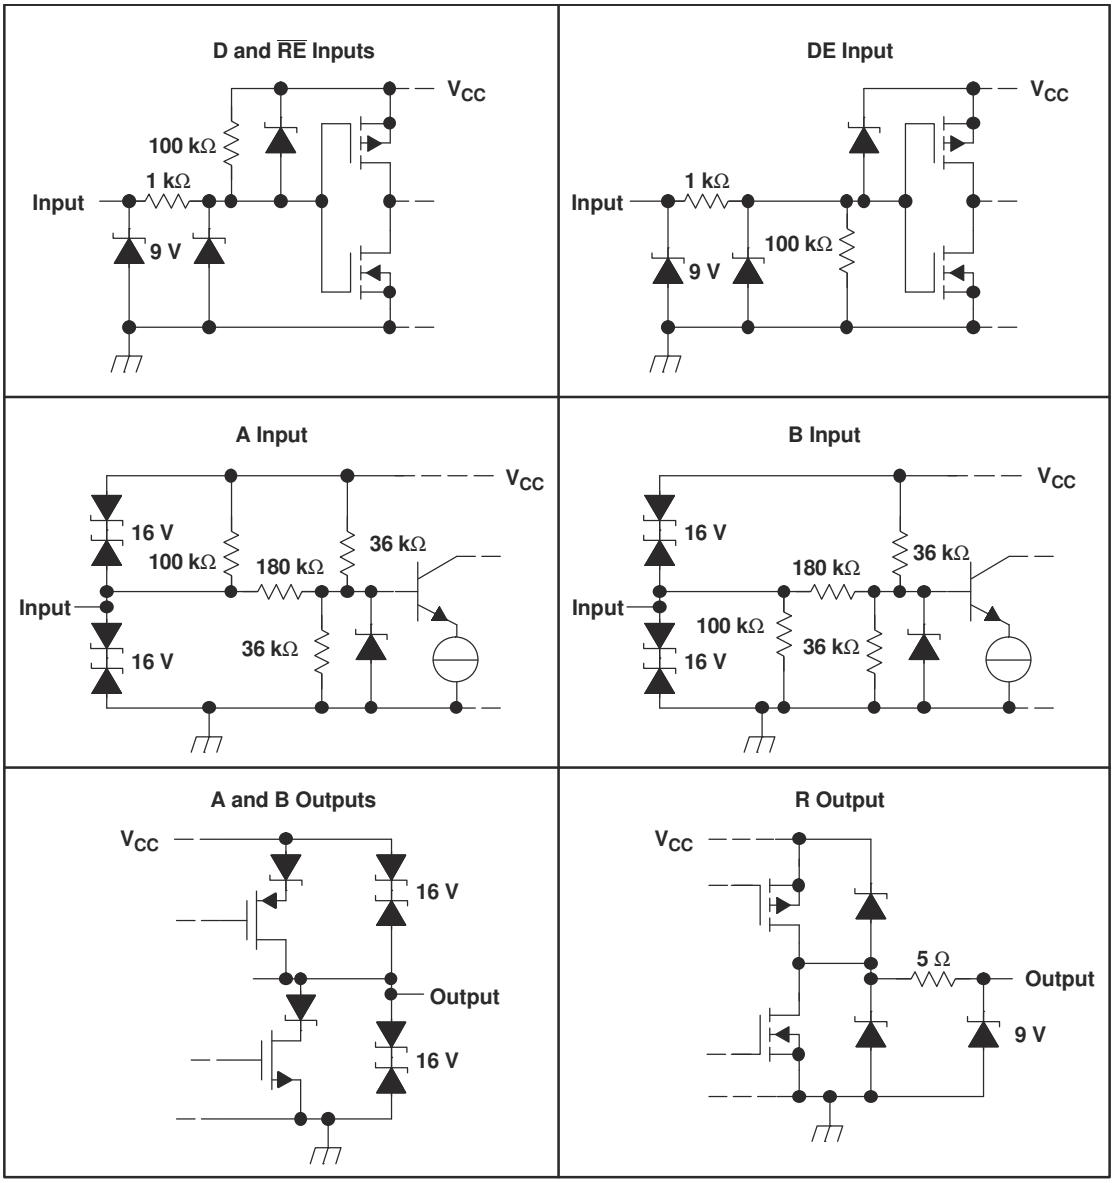



**Figure 8-2. Equivalent Input and Output Schematic Diagrams**

# 9 Application and Implementation

**Note**

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

## 9.1 Application Information

As electrical loads are physically distanced from their power source, the effects of supply and return line impedance and the resultant voltage drop must be accounted. If the supply regulation at the load cannot be maintained to the circuit requirements, it forces the use of remote sensing, additional regulation at the load, bigger or shorter cables, or a combination of these. The SN65HVD08 eases this problem by relaxing the supply requirements to allow for more variation in the supply voltage over typical RS-485 transceivers.

### 9.1.1 Supply Source Impedance

In the steady state, the voltage drop from the source to the load is simply the wire resistance times the load current as modeled in Figure 9-1.

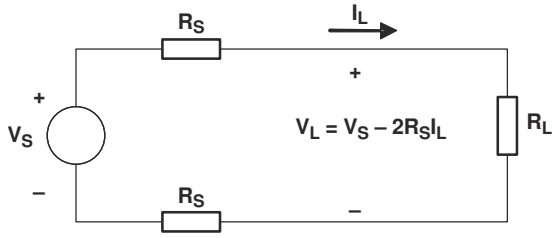



**Figure 9-1. Steady-State Circuit Model**

For example, if you were to provide 5-V ±5% supply power to a remote circuit with a maximum load requirement of 0.1 A (one SN65HVD08), the voltage at the load would fall below the 4.5-V minimum of most 5-V circuits with as little as 5.8 m of 28-GA conductors. Table 9-1 summarizes wire resistance and the length for 4.5 V and 3 V at the load with 0.1 A of load current. The maximum lengths would scale linearly for higher or lower load currents.

**Table 9-1. Maximum Cable Lengths for Minimum Load Voltages at 0.1 A Load**

| WIRE SIZE | RESISTANCE | 4.5-V LENGTH AT 0.1 A | 3-V LENGTH AT 0.1 A |
|---|---|---|---|
| 28 Gauge | 0.213 Ω/m | 5.8 m | 41.1 m |
| 24 Gauge | 0.079 Ω/m | 15.8 m | 110.7 m |
| 22 Gauge | 0.054 Ω/m | 23.1 m | 162.0 m |
| 20 Gauge | 0.034 Ω/m | 36.8 m | 257.3 m |
| 18 Gauge | 0.021 Ω/m | 59.5 m | 416.7 m |

Under dynamic load requirements, the distributed inductance and capacitance of the power lines may not be ignored and decoupling capacitance at the load is required. The amount depends upon the magnitude and frequency of the load current change but, if only powering the SN65HVD08, a 0.1 µF ceramic capacitor is usually sufficient.

### 9.1.2 Opto-Isolated Data Buses

Long RS-485 circuits can create large ground loops and pick up common-mode noise voltages in excess of the range tolerated by standard RS-485 circuits. A common remedy is to provide galvanic isolation of the data circuit from earth or local grounds.


Copyright © 2023 Texas Instruments Incorporated

Transformers, capacitors, or phototransistors most often provide isolation of the bus and the local node. Transformers and capacitors require changing signals to transfer the information over the isolation barrier and phototransistors (opto-isolators) can pass steady-state signals. Each of these methods incurs additional costs and complexity, the former in clock encoding and decoding of the data stream and the latter in requiring an isolated power supply.

Quite often, the cost of isolated power is repeated at each node connected to the bus as shown in Figure 9-2. The possibly lower-cost solution is to generate this supply once within the system and then distribute it along with the data line(s) as shown in Figure 9-3.

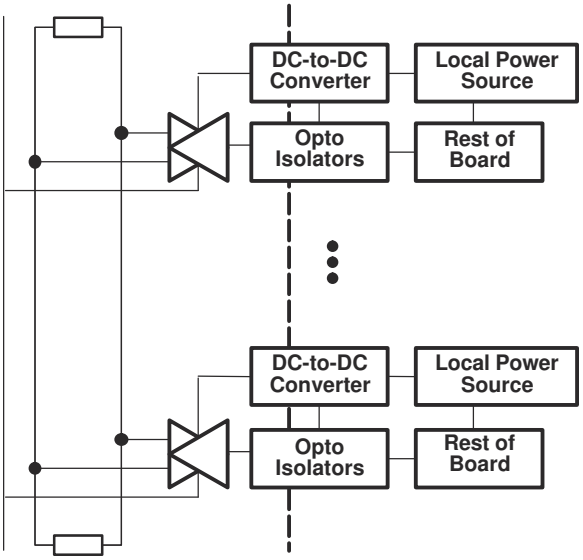



**Figure 9-2. Isolated Power at Each Node**

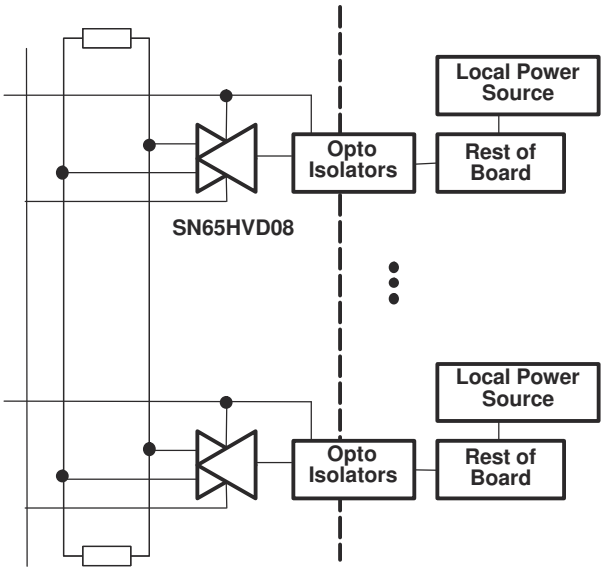



**Figure 9-3. Distribution of Isolated Power**

The features of the SN65HVD08 are particularly good for the application of Figure 9-3. Due to added supply source impedance, the low quiescent current requirements and wide supply voltage tolerance allow for the poorer load regulation.

Copyright © 2023 Texas Instruments Incorporated

### 9.1.3 Opto Alternative

The ISO150 is a two-channel, galvanically isolated data coupler capable of data rates of 80 Mbps. Each channel can be individually programmed to transmit data in either direction.

Data is transmitted across the isolation barrier by coupling complementary pulses through high-voltage 0.4-pF capacitors. Receiver circuitry restores the pulses to standard logic levels. Differential signal transmission rejects isolation-mode voltage transients up to 1.6 kV/ms.

ISO150 avoids the problems commonly associated with opto-couplers. Optically-isolated couplers require high current pulses and allowance must be made for LED aging. The ISO150's Bi-CMOS circuitry operates at 25 mW per channel with supply voltage range matching that of the SN65HVD08 of 3 V to 5.5 V.

Figure 9-4 shows a typical circuit.

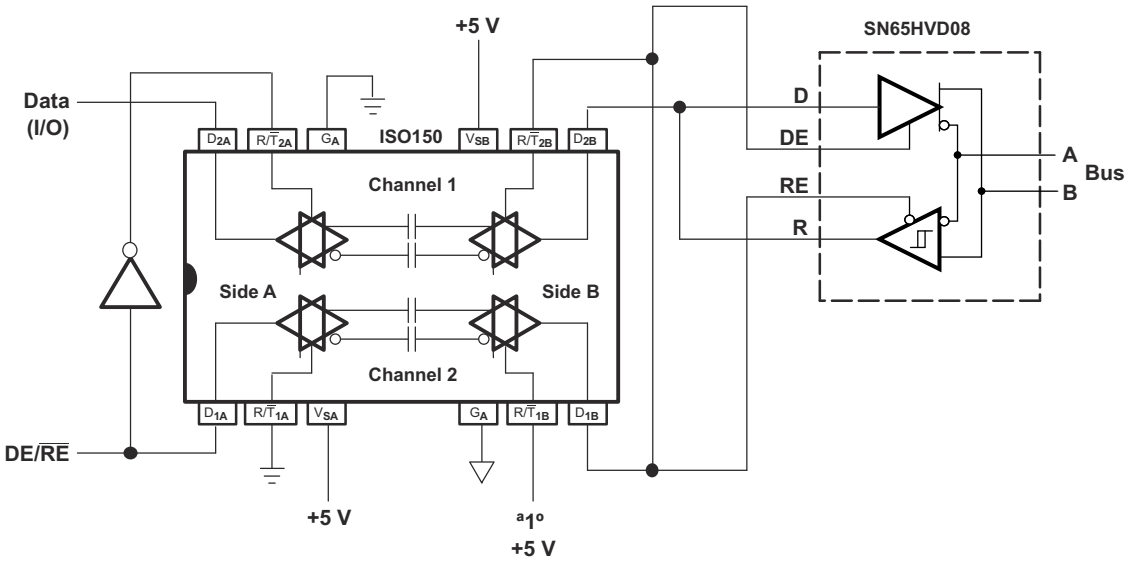



**Figure 9-4. Isolated RS-485 Interface**


Copyright © 2023 Texas Instruments Incorporated

## 9.2 Typical Application

An RS-485 bus consists of multiple transceivers connecting in parallel to a bus cable. To eliminate line reflections, each cable end is terminated with a termination resistor, $R_T$, whose value matches the characteristic impedance, $Z_0$, of the cable. This method, known as parallel termination, allows for higher data rates over longer cable length.

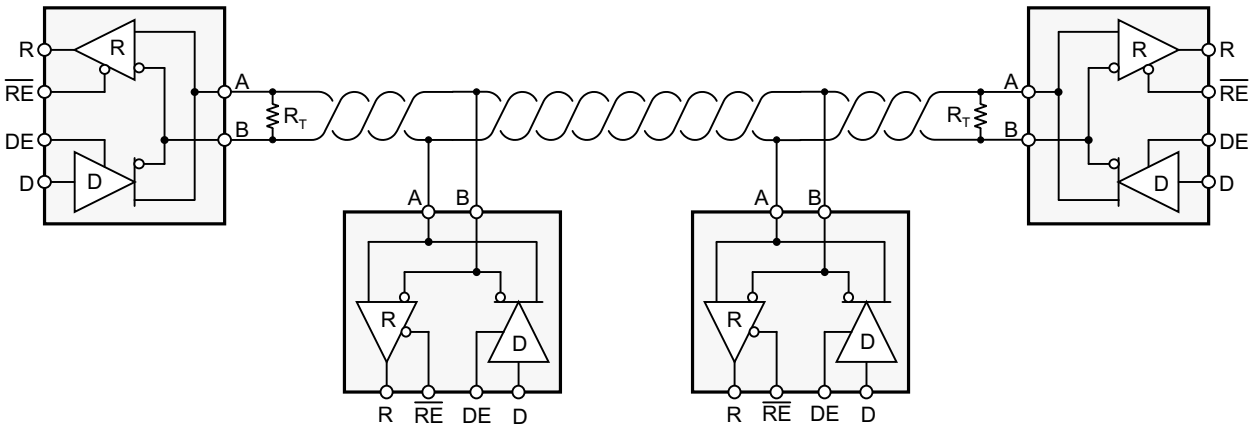



**Figure 9-5. Typical Application Diagram**

### 9.2.1 Design Requirements

RS-485 is a robust electrical standard suitable for long-distance networking that may be used in a wide range of applications with varying requirements, such as distance, data rate, and number of nodes.

#### *9.2.1.1 Data Rate and Bus Length*

There is an inverse relationship between data rate and bus length, meaning the higher the data rate, the shorter the cable length; and conversely, the lower the data rate, the longer the cable may be without introducing data errors. While most RS-485 systems use data rates between 10 kbps and 100 kbps, some applications require data rates up to 250 kbps at distances of 4000 feet and longer. Longer distances are possible by allowing for small signal jitter of up to 5 or 10%.

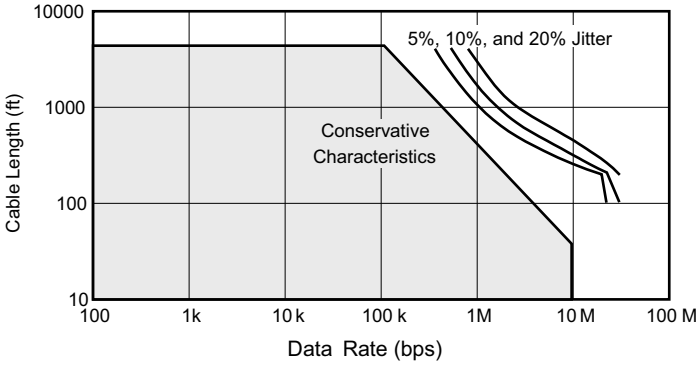



**Figure 9-6. Cable Length vs Data Rate Characteristic**

Copyright © 2023 Texas Instruments Incorporated

#### 9.2.1.2 Stub Length

When connecting a node to the bus, the distance between the transceiver inputs and the cable trunk, known as the stub, should be as short as possible. Stubs present a non-terminated piece of bus line which can introduce reflections as the length of the stub increases. As a general guideline, the electrical length, or round-trip delay, of a stub should be less than one-tenth of the rise time of the driver, thus giving a maximum physical stub length as shown in Equation 1.

$$L_{stub} \leq 0.1 \times t_r \times v \times c \quad (1)$$

Where:

- $t_r$ is the 10/90 rise time of the driver
- c is the speed of light ($3 \times 10^8$ m/s)
- v is the signal velocity of the cable or trace as a factor of c

Per Equation 1, the maximum recommended stub length for the minimum driver output rise time of the SNx5HVD08 for a signal velocity of 78% is 0.23 meters (0.75 feet).

#### 9.2.1.3 Bus Loading

The RS-485 standard specifies that a compliant driver must be able to driver 32 unit loads (UL), where 1 unit load represents a load impedance of approximately 12 kΩ. Because the SN65HVD08 and SN75HVD08 are each 1/8 UL transceivers, it is possible to connect up to 256 receivers to the bus.

#### 9.2.1.4 Receiver Failsafe

The differential receivers of the SNx5HVD08 family are “failsafe” to invalid bus states caused by:

- Open bus conditions, such as a disconnected connector
- Shorted bus conditions, such as cable damage shorting the twisted-pair together
- Idle bus conditions that occur when no driver on the bus is actively driving

In any of these cases, the differential receiver will output a failsafe logic High state so that the output of the receiver is not indeterminate.

Receiver failsafe is accomplished by offsetting the receiver thresholds such that the “input indeterminate” range does not include zero volts differential.

In order to comply with the RS-422 and RS-485 standards, the receiver output must output a High when the differential input VID is more positive than +200 mV, and must output a Low when VID is more negative than -200 mV. The receiver parameters which determine the failsafe performance are VIT(+) and VIT(-).

As shown in the Electrical Characteristics table, differential signals more negative than -200 mV will always cause a Low receiver output, and differential signals more positive than -10 mV will always cause a High receiver output. Thus, when the differential input signal is close to zero, it is still above the maximum VIT(+) threshold of -10 mV, and the receiver output will be High.


Copyright © 2023 Texas Instruments Incorporated

### 9.2.2 Detailed Design Procedure

In order to protect bus nodes against high-energy transients, the implementation of external transient protection devices is necessary.

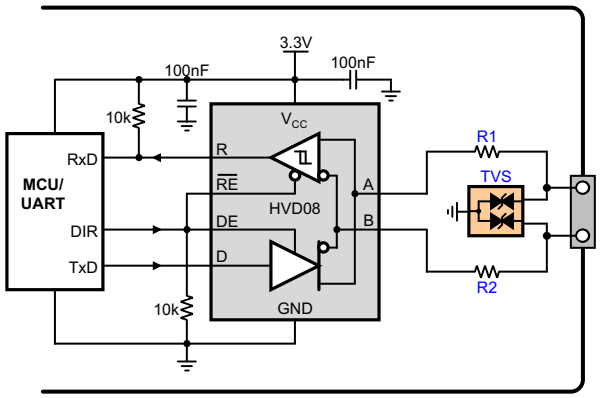



**Figure 9-7. Transient protection against ESD, EFT, and Surge transients**

Figure 9-7 suggests a protection circuit against 10 kV ESD (IEC 61000-4-2), 4 kV EFT (IEC 61000-4-4), and 1 kV surge (IEC 61000-4-5) transients. Table 9-2 shows the associated Bill of Materials.

**Table 9-2. Bill of Materials**

| DEVICE | FUNCTION | ORDER NUMBER | MANUFACTURER |
|---|---|---|---|
| XCVR | 3.3 V to 5 V, 10 Mbps RS-485 Transceiver | SNx5HVD08 | TI |
| R1, R2 | 10 Ω, Pulse-Proof Thick-Film Resistor | CRCW0603010RJNEAHP | Vishay |
| TVS | Bidirectional 400 W Transient Suppressor | CDSOT23-SM712 | Bourns |

### 9.2.3 Application Curve

Figure 9-8 demonstrates operation of the SN65HVD08 at a signaling rate of 10 Mbps.

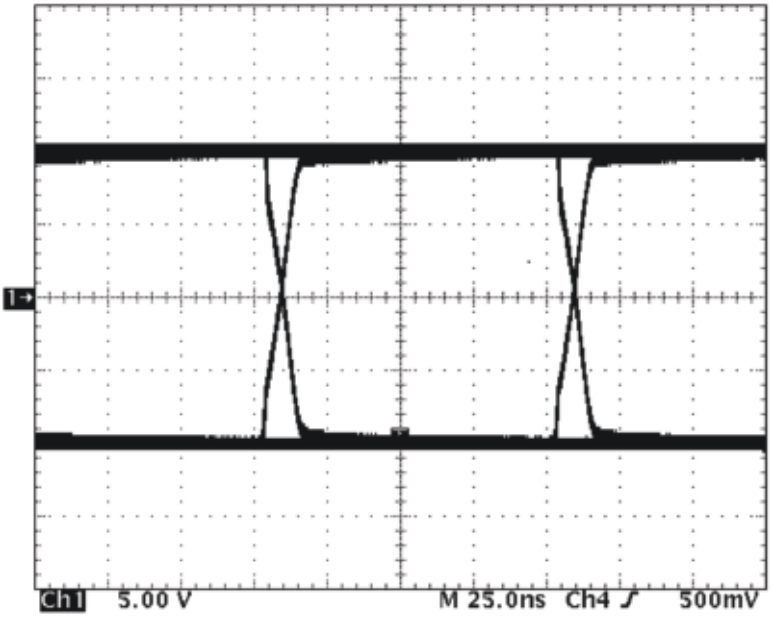



**Figure 9-8. SNx5HVD08 Differential Output Waveform**

## 9.3 Power Supply Recommendations

To ensure reliable operation at all data rates and supply voltages, each supply should be buffered with a 100-nF ceramic capacitor located as close to the supply pins as possible. The TPS76333 and TPS76350 are linear voltage regulators suitable for 3.3 V and 5 V supplies respectively.

## 9.4 Layout

### 9.4.1 Layout Guidelines

On-chip IEC-ESD protection is sufficient for laboratory and portable equipment but insufficient for EFT and surge transients occurring in industrial environments. Therefore, robust and reliable bus node design requires the use of external transient protection devices.

Because ESD and EFT transients have a wide frequency bandwidth from approximately 3 MHz to 3 GHz, high frequency layout techniques must be applied during PCB design.

1. Place the protection circuitry close to the bus connector to prevent noise transients from entering the board.
2. Use VCC and ground planes to provide low-inductance. Note that high-frequency currents follow the path of least inductance and not the path of least impedance.
3. Design the protection components into the direction of the signal path. Do not force the transient currents to divert from the signal path to reach the protection device.
4. Apply 100-nF to 220-nF bypass capacitors as close as possible to the VCC-pins of transceiver, UART, or controller ICs on the board.
5. Use at least two vias for VCC and ground connections of bypass capacitors and protection devices to minimize effective via-inductance.
6. Use 1-kΩ to 10-kΩ pullup and pulldown resistors for enable lines to limit noise currents in these lines during transient events.
7. Insert series pulse-proof resistors into the A and B bus lines if the TVS clamping voltage is higher than the specified maximum voltage of the transceiver bus terminals. These resistors limit the residual clamping current into the transceiver and prevent it from latching up.
8. While pure TVS protection is sufficient for surge transients up to 1 kV, higher transients require metal-oxide varistors (MOVs) which reduce the transients to a few hundred volts of clamping voltage, and transient blocking units (TBUs) that limit transient current to less than 1 mA.

### 9.4.2 Layout Example

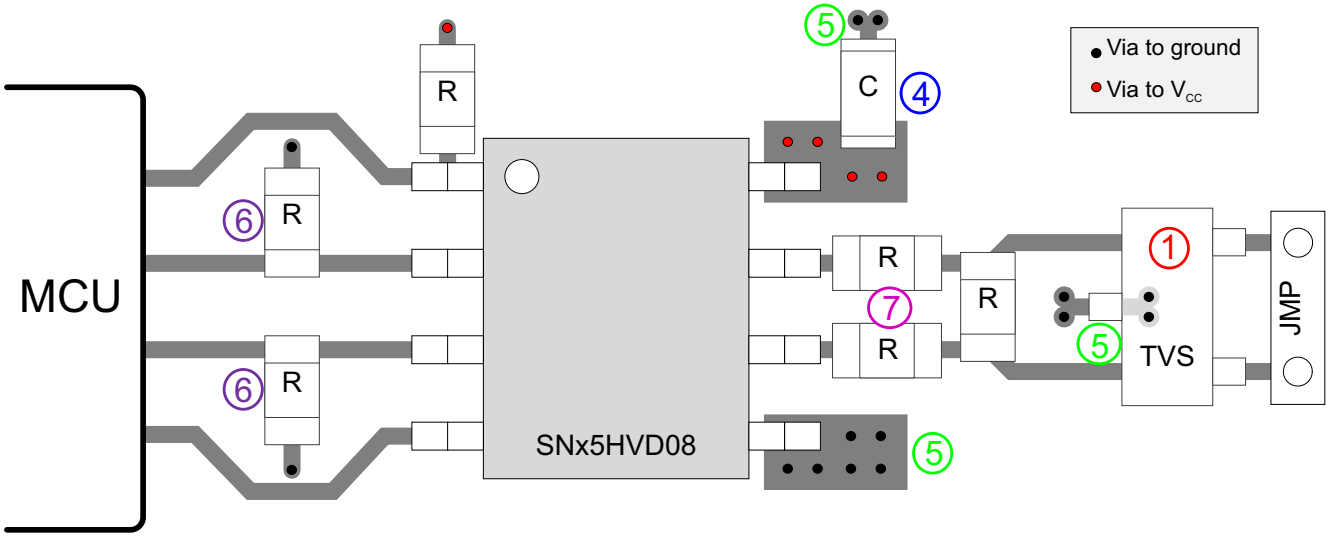



**Figure 9-9. SNx5HVD08 Layout example**


Copyright © 2023 Texas Instruments Incorporated

# 10 Device and Documentation Support

## 10.1 Device Support

### 10.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

## 10.2 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

## 10.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.
All trademarks are the property of their respective owners.

## 10.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 10.5 Glossary

| | |
|---|---|
| TI Glossary | This glossary lists and explains terms, acronyms, and definitions. |

# 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2023 Texas Instruments Incorporated

## PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package \| Pins | Package qty \| Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|---|---|---|---|---|---|---|---|---|---|
| SN65HVD08D | Obsolete | Production | SOIC (D) \| 8 | - | - | Call TI | Call TI | -40 to 85 | VP08 |
| SN65HVD08DR | Active | Production | SOIC (D) \| 8 | 2500 \| LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | VP08 |
| SN65HVD08DR.A | Active | Production | SOIC (D) \| 8 | 2500 \| LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | VP08 |
| SN65HVD08DRG4 | Active | Production | SOIC (D) \| 8 | 2500 \| LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | VP08 |
| SN65HVD08P | Active | Production | PDIP (P) \| 8 | 50 \| TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 85 | 65HVD08 |
| SN65HVD08P.A | Active | Production | PDIP (P) \| 8 | 50 \| TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 85 | 65HVD08 |
| SN75HVD08D | Obsolete | Production | SOIC (D) \| 8 | - | - | Call TI | Call TI | 0 to 70 | VN08 |
| SN75HVD08DR | Obsolete | Production | SOIC (D) \| 8 | - | - | Call TI | Call TI | 0 to 70 | VN08 |
| SN75HVD08P | Active | Production | PDIP (P) \| 8 | 50 \| TUBE | Yes | NIPDAU | N/A for Pkg Type | 0 to 70 | 75HVD08 |
| SN75HVD08P.A | Active | Production | PDIP (P) \| 8 | 50 \| TUBE | Yes | NIPDAU | N/A for Pkg Type | 0 to 70 | 75HVD08 |

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.


**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION

**REEL DIMENSIONS**

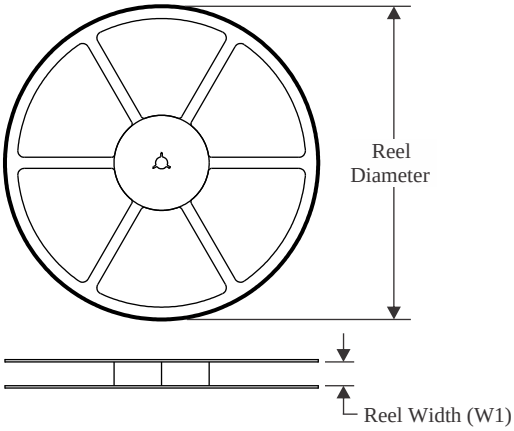



**TAPE DIMENSIONS**

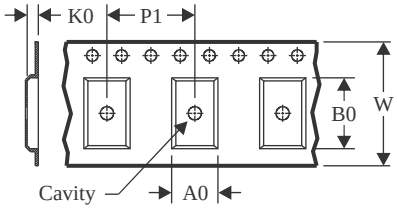


| | |
|---|---|
| A0 | Dimension designed to accommodate the component width |
| B0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |


**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**

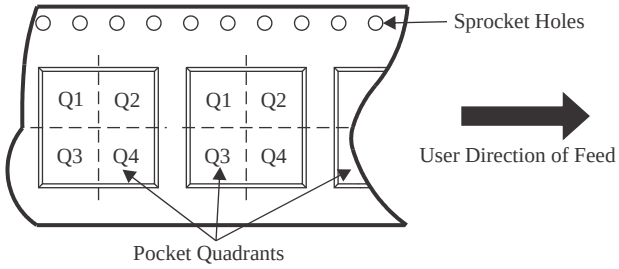


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SN65HVD08DR | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |


TAPE AND REEL BOX DIMENSIONS

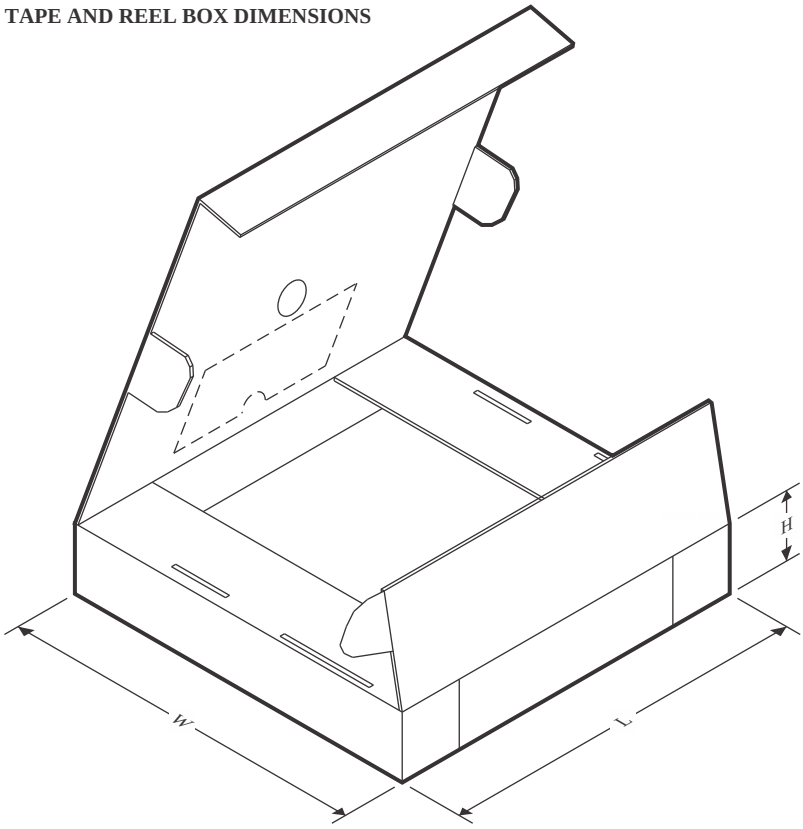


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---|---|---|---|---|---|---|---|
| SN65HVD08DR | SOIC | D | 8 | 2500 | 340.5 | 336.1 | 25.0 |

## TUBE

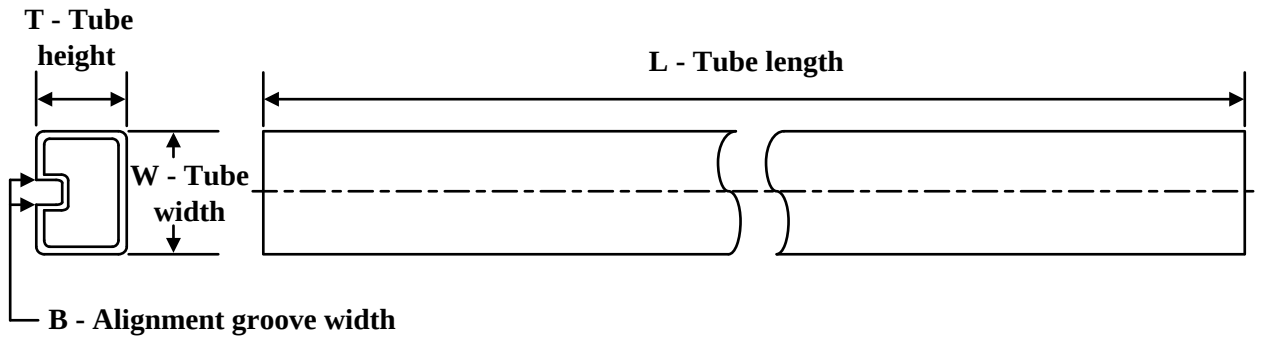


*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (µm) | B (mm) |
|---|---|---|---|---|---|---|---|---|
| SN65HVD08P | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |
| SN65HVD08P.A | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |
| SN75HVD08P | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |
| SN75HVD08P.A | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |




# PACKAGE OUTLINE

## D0008A


## SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

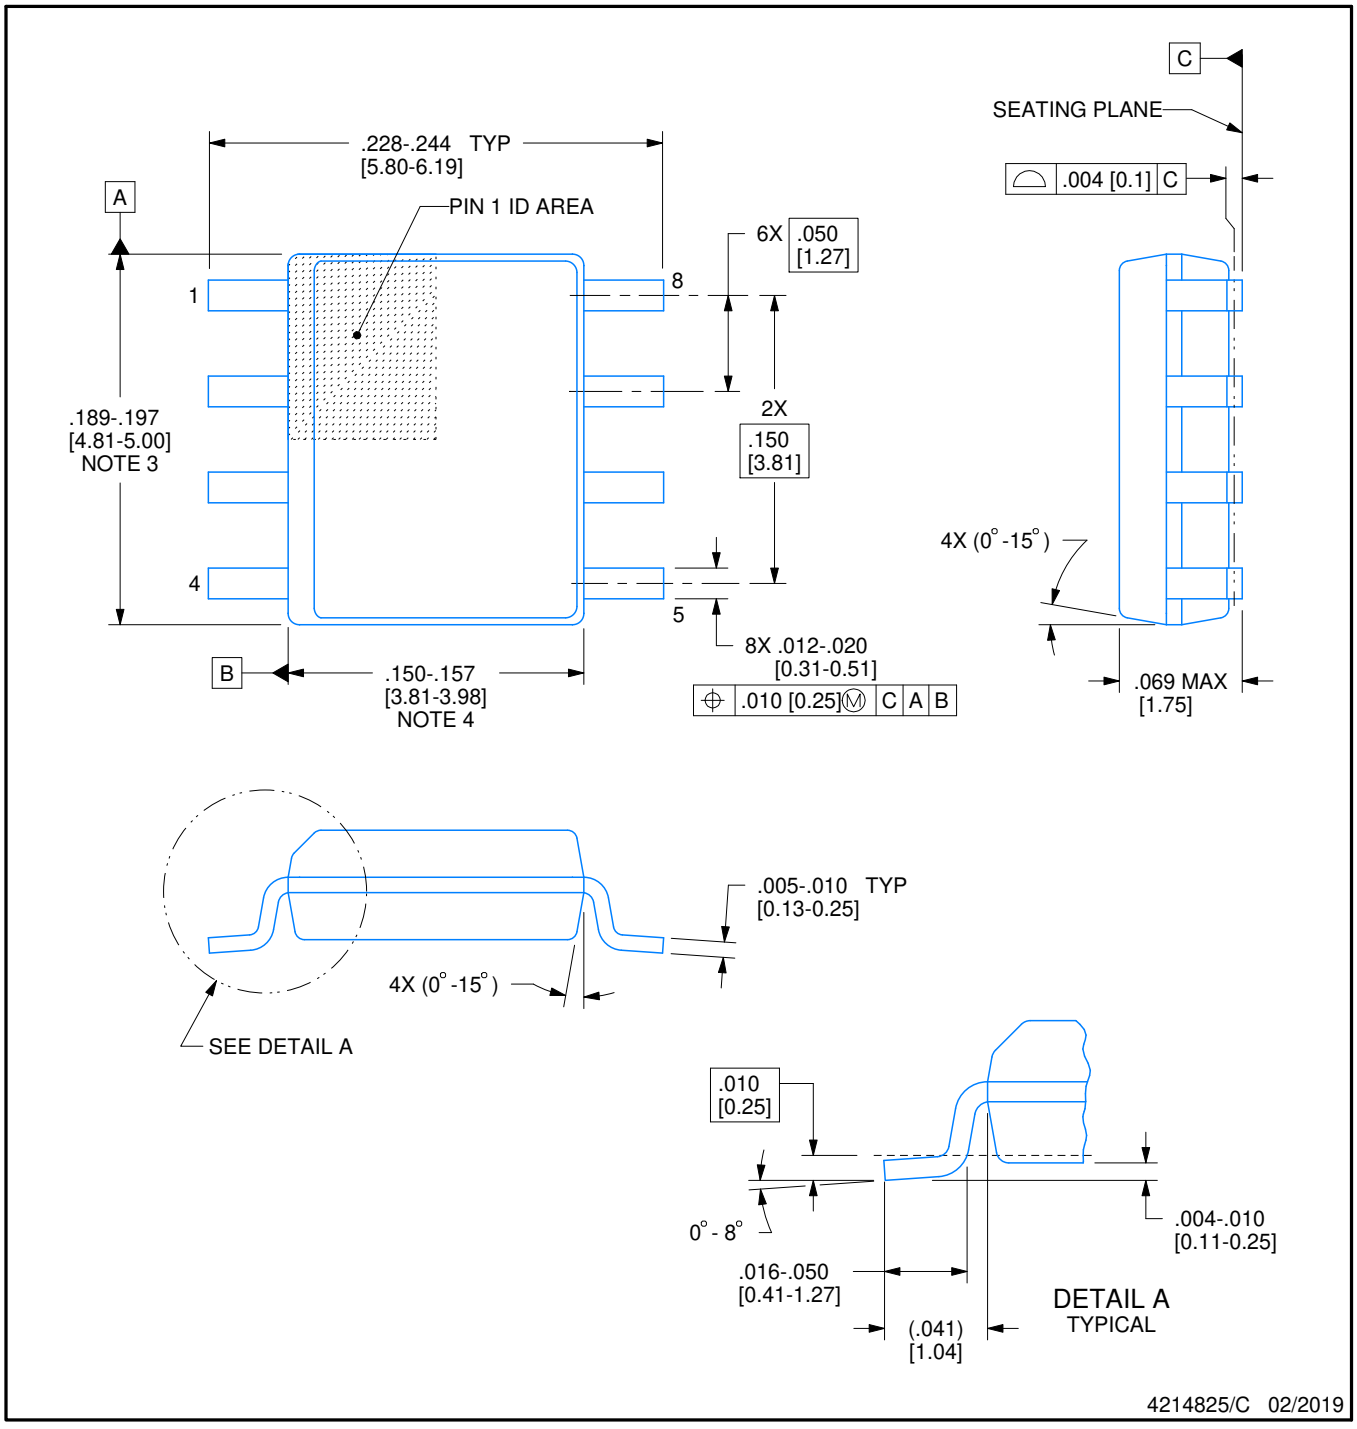



NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

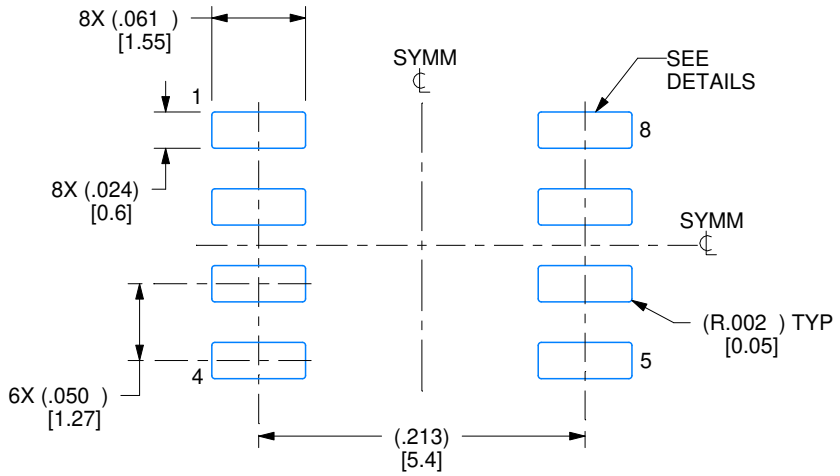


LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

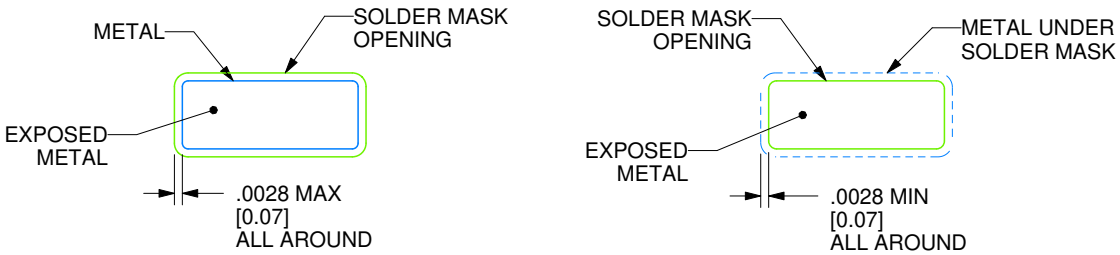


SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

## D0008A

## SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

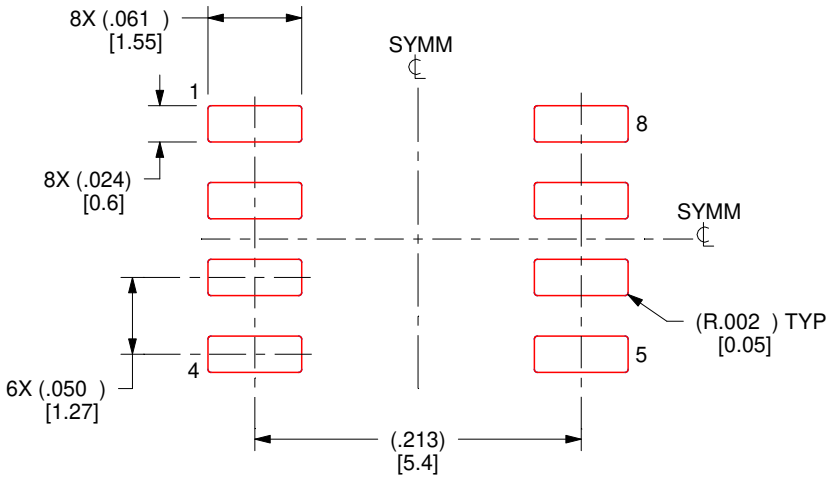



SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

P (R–PDIP–T8) PLASTIC DUAL–IN–LINE PACKAGE

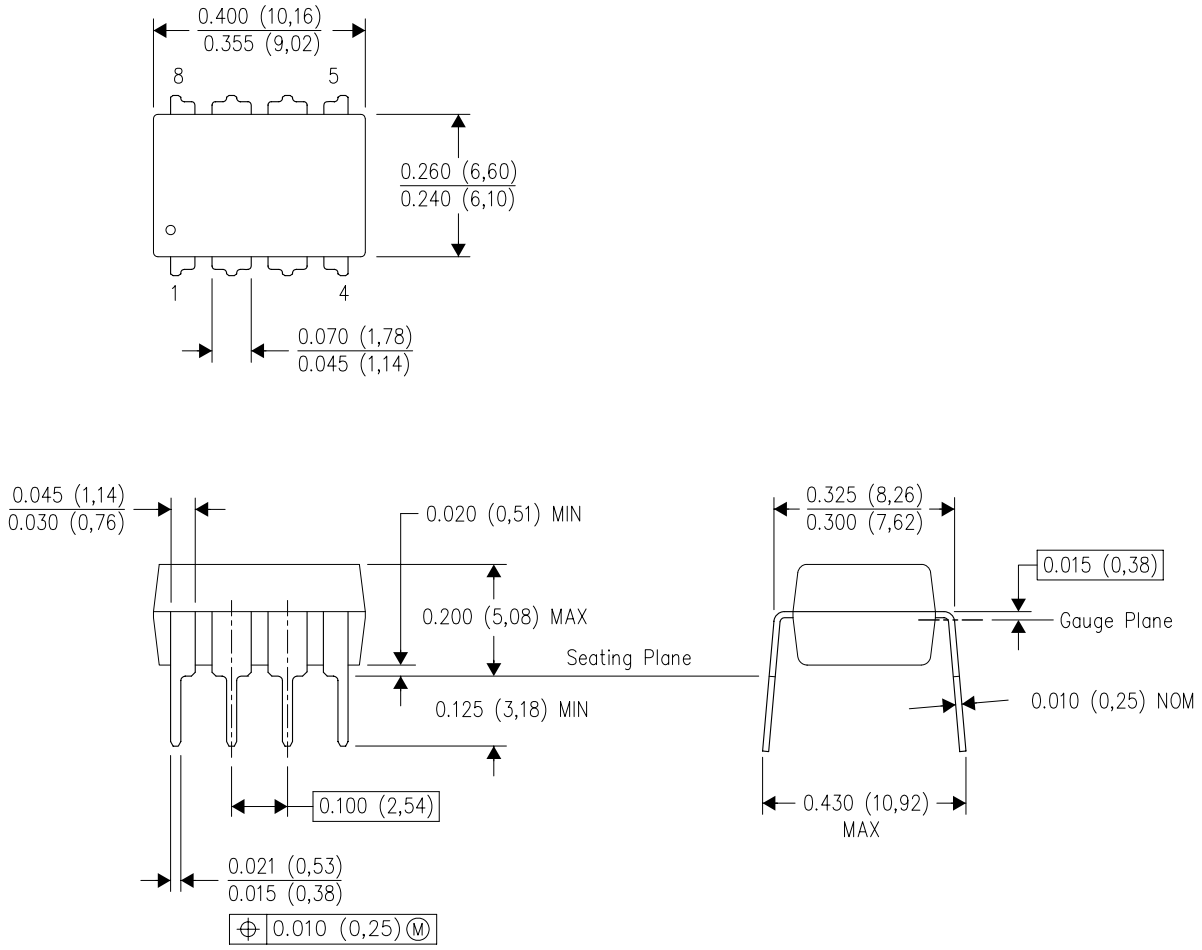


NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Falls within JEDEC MS–001 variation BA.

# IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025