
SUGGESTED MOUNTING HOLE PATTERN
FOR 4.5 X 15mm FUSE (2AG)
SCALE = 4:1

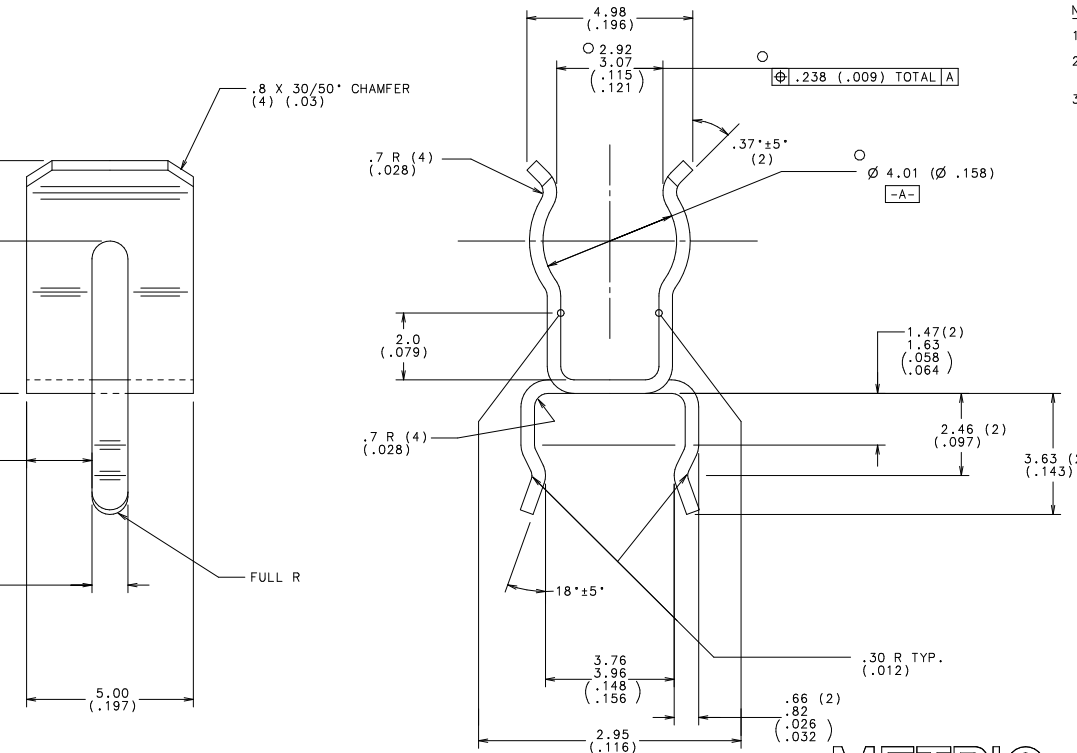


NOTES:

1. DECIMAL EQUIVALENT = (.XXX)
2. TOOLING MUST ALSO BE CAPABLE OF PRODUCING PART No. 01110501Z.
3. HEAT TREAT 600°F FOR 2 HOURS.

| NO | COMPONENT NO | DESCRIPTION | QTY/M | U/M |
|---|---|---|---|---|
| 2 | 010113 | HIGH PURITY TIN | .015 | LB |
| 1 | 046184 | BeCu .41(.016) THICK | .858 | LB |

**BILL OF MATERIAL**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

| | |
|---|---|
| O | DENOTES CRITICAL CHARACTERISTICS. |
| CPK | DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE |
| ⟨ST⟩ | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |
| CP | DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. |

COPIES TO: 1 9 18 / 2 10 19 / 3 12 20 / 4 13 21 / 5 14 23 / 6 15 33 / 7 16 43 / 8 17 53

MATL SPEC

FINISH: TIN PLATE .0001-.0006 PER L/F SPEC. LS-001002-B

DRW: PJM DATE: 05/28/00 SCALE: 10:1

CHK: DATE: SHEET DR

APPD: DATE: RAW STK WT LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ± .25 FRACTION ±
THREE PLACE DEC ± .130 ANGULAR ±1°

TITLE: 2.00 X 5 X 20mm P.C. MOUNT FUSE CLIP W/OUT EARS

METRIC
UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS

UNCONTROLLED DOCUMENT

Littelfuse | REVISION: C | DRWG. NO. 01110512Z | FINAL