



REV.	DATE	ECR NO.	DESCRIPTION
A	11/20/97	–	ADD CENTER CONTACT
B	04/08/98	–	ADD LMR240 CABLE TO TITLE
C	12/12/06	–	UPDATE DRAWING FORMAT
D	04/01/08	–	REVISE INSULATOR TO PTFE
E	06/23/10	2062	ADD CRIMP DIMENSIONS AND CRIMP TOOL INFORMATION TO DRAWINGS

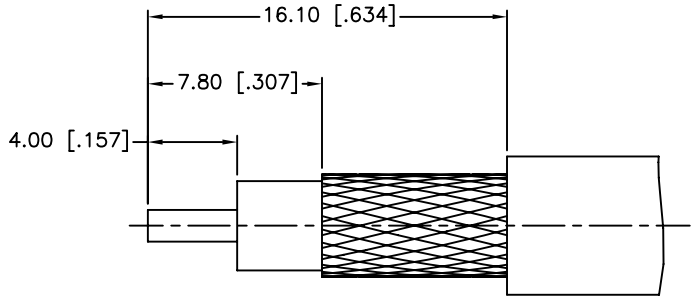

RECOMMENDED
CABLE STRIPPING DIM'S

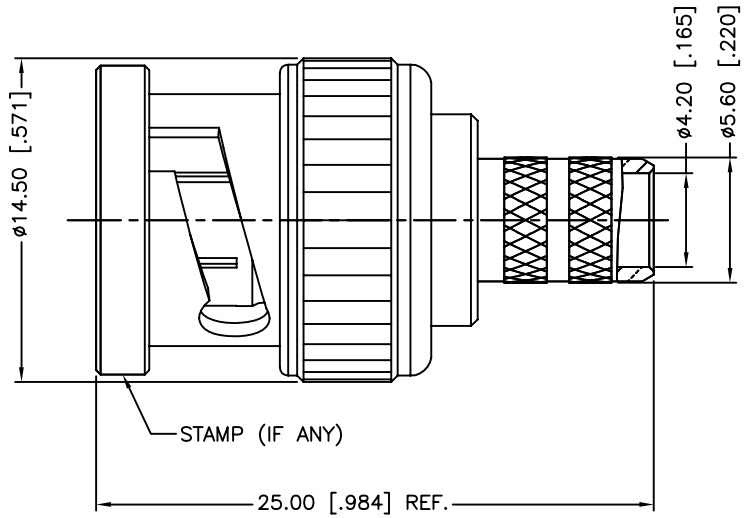

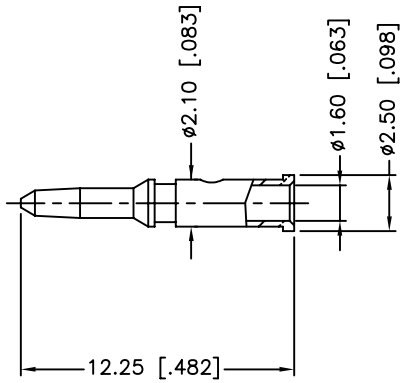

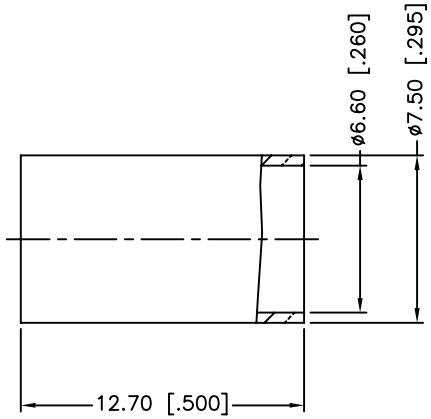

1. CRIMPED FERRULE
   HEX. CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
   HEX. CRIMP SIZE .068"
3. CRIMP TOOL: A

	DESCRIPTION	MATERIAL	FINISH	QTY
9	FERRULE	BRASS	NICKEL	1
8	CONTACT PIN	BRASS	GOLD	1
7	WASHER	BRASS	NICKEL	1
6	SPRING	SK5	NICKEL	1
5	RETAINER RING	BRASS	NICKEL	1
4	GASKET	RUBBER	RED	1
3	INSULATOR	DELRIN	NATURAL	1
2	BODY	BRASS	NICKEL	1
1	SHELL	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	06/23/10
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/CONNEX/112533.DWG

Amphenol Connex

PART DESCRIPTION
BNC CRIMP PLUG
(FOR BELDEN RG-8/X LMR240 CABLE)

PART NO. 112533

DWG. NO.	REV.	SIZE	SCALE
112533.DWG	E	A	NA