

- **C-Stable Amplifiers Drive Any Capacitive Load**
- **High Speed**
  - **165 MHz Bandwidth (−3 dB); C_L = 0 pF**
  - **100 MHz Bandwidth (−3 dB); C_L = 100 pF**
  - **35 MHz Bandwidth (−3 dB); C_L = 1000 pF**
  - **400 V/μs Slew Rate**
- **Unity Gain Stable**
- **High Output Drive, I_O = 100 mA (typ)**
- **Very Low Distortion**
  - **THD = −75 dBc (f = 1 MHz, R_L = 150 Ω)**
  - **THD = −89 dBc (f = 1 MHz, R_L = 1 kΩ)**
- **Wide Range of Power Supplies**
  - **V_{CC} = ±5 V to ±15 V**
- **Available in Standard SOIC or MSOP PowerPAD™ Package**
- **Evaluation Module Available**

THS4041
D AND DGN PACKAGE
(TOP VIEW)

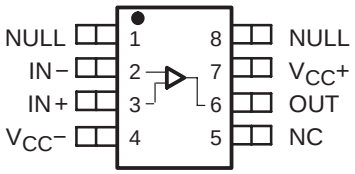

NC − No internal connection

THS4042
D AND DGN PACKAGE
(TOP VIEW)

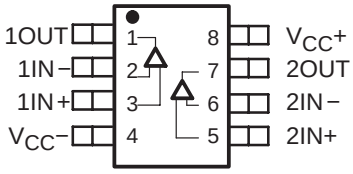




Cross Section View Showing
PowerPAD Option (DGN)

description

The THS4041 and THS4042 are single/dual, high-speed voltage feedback amplifiers capable of driving any capacitive load. This makes them ideal for a wide range of applications including driving video lines or buffering ADCs. The devices feature high 165-MHz bandwidth and 400-V/μsec slew rate. The THS4041/2 are stable at all gains for both inverting and noninverting configurations. For video applications, the THS4041/2 offer excellent video performance with 0.01% differential gain error and 0.01° differential phase error. These amplifiers can drive up to 100 mA into a 20-Ω load and operate off power supplies ranging from ±5V to ±15V.

OUTPUT AMPLITUDE
vs
FREQUENCY

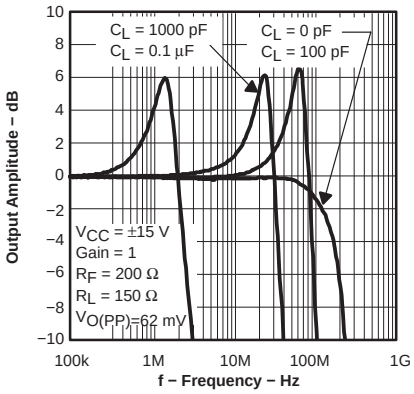

RELATED DEVICES

RELATED DEVICES	
DEVICE	**DESCRIPTION**
THS4011/2	290-MHz Low Distortion High-Speed Amplifier
THS4031/2	100-MHz Low Noise High-Speed Amplifier
THS4081/2	175-MHz Low Power High-Speed Amplifiers

CAUTION: The THS4041 and THS4042 provide ESD protection circuitry. However, permanent damage can still occur if this device is subjected to high-energy electrostatic discharges. Proper ESD precautions are recommended to avoid any performance degradation or loss of functionality.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Insruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2000, Texas Instruments Incorporated

AVAILABLE OPTIONS

T_A	NUMBER OF CHANNELS	PACKAGED DEVICES		MSOP SYMBOL	EVALUATION MODULE
		PLASTIC SMALL OUTLINE† (D)	PLASTIC MSOP† (DGN)		
0°C to 70°C	1	THS4041CD	THS4041CDGN	ACO	THS4041EVM
	2	THS4042CD	THS4042CDGN	ACC	THS4042EVM
−40°C to 85°C	1	THS4041D	THS4041IDGN	ACP	—
	2	THS4042ID	THS4042IDGN	ACD	—

† The D and DGN packages are available taped and reeled. Add an R suffix to the device type (i.e., THS4041CDGNR).

functional block diagram

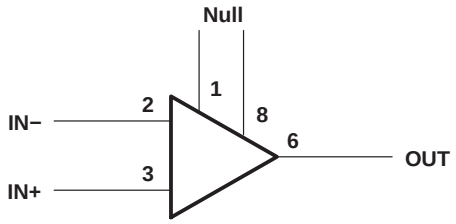


Figure 2. THS4041 − Single Channel

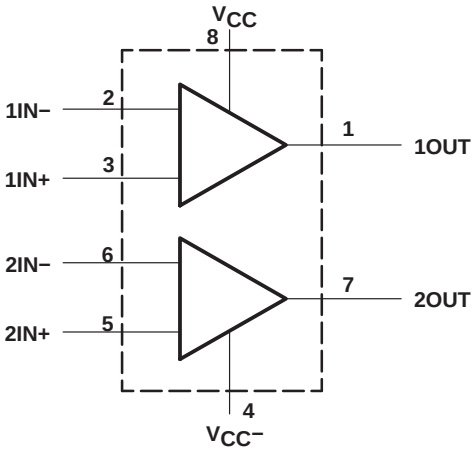


Figure 1. THS4042 − Dual Channel

absolute maximum ratings over operating free-air temperature (unless otherwise noted)†

Supply voltage, V_{CC} . . . . . ±16.5 V
Input voltage, V_I . . . . . ±V_{CC}
Output current, I_O . . . . . 150 mA
Differential input voltage, V_{IO} . . . . . ±4 V
Continuous total power dissipation . . . . . See Dissipation Rating Table
Maximum junction temperature, T_J . . . . . 150°C
Operating free-air temperature, T_A: C-suffix . . . . . 0°C to 70°C
I-suffix . . . . . −40°C to 85°C
Storage temperature, T_{stg} . . . . . −65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds . . . . . 300°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

DISSIPATION RATING TABLE

PACKAGE	θ_{JA} (°C/W)	θ_{JC} (°C/W)	T_A = 25°C POWER RATING
D	167†	38.3	740 mW
DGN‡	58.4	4.7	2.14 W

† This data was taken using the JEDEC standard Low-K test PCB. For the JEDEC proposed High-K test PCB, the θ_{JA} is 95°C/W with a power rating at T_A = 25°C of 1.32 W.
‡ This data was taken using 2 oz. trace and copper pad that is soldered directly to a 3 in. × 3 in. PC. For further information, refer to *Application Information* section of this data sheet.

recommended operating conditions

		MIN	NOM	MAX	UNIT
Supply voltage, V_{CC+} and V_{CC-}	Dual supply	±4.5		±16	V
	Single supply	9		32	
Operating free-air temperature, T_A	C-suffix	0		70	°C
	I-suffix	−40		85	

electrical characteristics at T_A = 25°C, V_{CC} = ±15 V, R_L = 150 Ω (unless otherwise noted)

dynamic performance

PARAMETER		TEST CONDITIONS†			MIN	TYP	MAX	UNIT
BW	Dynamic performance small-signal bandwidth (−3 dB)	V_{CC} = ±15 V	R_f = 200 Ω	Gain = 1		165		MHz
		V_{CC} = ±5 V	R_f = 200 Ω			150		
		V_{CC} = ±15 V	R_f = 1.3 kΩ	Gain = 2		60		MHz
		V_{CC} = ±5 V	R_f = 1.3 kΩ			60		
	Bandwidth for 0.1 dB flatness	V_{CC} = ±15 V	R_f = 200 Ω	Gain = 1		45		MHz
		V_{CC} = ±5 V	R_f = 200 Ω			45		
	Full power bandwidth§	$V_{O(pp)}$ = 20 V,	V_{CC} = ±15 V			6.3		MHz
		$V_{O(pp)}$ = 5 V,	V_{CC} = ±5 V			20		
SR	Slew rate‡	V_{CC} = ±15 V,	20-V step,	Gain = 5		400		V/µs
		V_{CC} = ±5 V,	5-V step,	Gain = −1		325		
t_S	Settling time to 0.1%	V_{CC} = ±15 V,	5-V step	Gain = −1		120		ns
		V_{CC} = ±5 V,	2-V step			120		
	Settling time to 0.01%	V_{CC} = ±15 V,	5-V step	Gain = −1		250		ns
		V_{CC} = ±5 V,	2-V step			280		

† Full range = 0°C to 70°C for C suffix and −40°C to 85°C for I suffix
‡ Slew rate is measured from an output level range of 25% to 75%.
§ Full power bandwidth = slew rate / 2 π $V_{O(Peak)}$.

electrical characteristics at T_A = 25°C, V_{CC} = ±15 V, R_L = 150 Ω (unless otherwise noted) (continued)

noise/distortion performance

PARAMETER		TEST CONDITIONS†			MIN	TYP	MAX	UNIT
THD	Total harmonic distortion	$V_{O(pp)}$ = 2 V, f = 1 MHz, Gain = 2	V_{CC} = ±15 V	R_L = 150 Ω		−75		dBc
				R_L = 1 kΩ		−89		
			V_{CC} = ±5 V	R_L = 150 Ω		−75		
				R_L = 1 kΩ		−86		
V_n	Input voltage noise	V_{CC} = ±5 V or ±15 V,	f = 10 kHz			14		nV/√Hz
I_n	Input current noise	V_{CC} = ±5 V or ±15 V,	f = 10 kHz			0.9		pA/√Hz
	Differential gain error	Gain = 2, 40 IRE modulation,	NTSC, ±100 IRE ramp	V_{CC} = ±15 V		0.01%		
				V_{CC} = ±5 V		0.01%		
	Differential phase error	Gain = 2, 40 IRE modulation,	NTSC, ±100 IRE ramp	V_{CC} = ±15 V		0.01°		
				V_{CC} = ±5 V		0.02°		
	Channel-to-channel crosstalk (THS4042 only)	V_{CC} = ±5 V or ±15 V,	f = 1 MHz	Gain = 2		−64		dB

† Full range = 0°C to 70°C for C suffix and −40°C to 85°C for I suffix

dc performance

PARAMETER		TEST CONDITIONS†			MIN	TYP	MAX	UNIT
	Open loop gain	V_{CC} = ±15 V, R_L = 1 kΩ	V_O = ±10 V,	T_A = 25°C	74	80		dB
				T_A = full range	69			
		V_{CC} = ±5 V, R_L = 250 Ω	V_O = ±2.5 V,	T_A = 25°C	69	76		
				T_A = full range	66			
V_{OS}	Input offset voltage	V_{CC} = ±5 V or ±15 V		T_A = 25°C		2.5	10	mV
				T_A = full range			13	
	Offset voltage drift	V_{CC} = ±5 V or ±15 V		T_A = full range		10		µV/°C
I_{IB}	Input bias current	V_{CC} = ±5 V or ±15 V		T_A = 25°C		2.5	6	µA
				T_A = full range			8	
I_{OS}	Input offset current	V_{CC} = ±5 V or ±15 V		T_A = 25°C		35	250	nA
				T_A = full range			400	
	Offset current drift	T_A = full range				0.3		nA/°C

† Full range = 0°C to 70°C for C suffix and −40°C to 85°C for I suffix

input characteristics

PARAMETER		TEST CONDITIONS†			MIN	TYP	MAX	UNIT
V_{ICR}	Common-mode input voltage range	V_{CC} = ±15 V			±13.8	±14.3		V
		V_{CC} = ±5 V			±3.8	±4.3		
CMRR	Common mode rejection ratio	V_{CC} = ±15 V,	V_{ICR} = ±12 V	T_A = full range	70	90		dB
		V_{CC} = ±5 V,	V_{ICR} = ±2.5 V		80	100		
r_i	Input resistance					1		MΩ
C_i	Input capacitance					1.5		pF

† Full range = 0°C to 70°C for C suffix and −40°C to 85°C for I suffix

electrical characteristics at T_A = 25°C, V_{CC} = ±15 V, R_L = 150 Ω (unless otherwise noted) (continued)

output characteristics

PARAMETER		TEST CONDITIONS†		MIN	TYP	MAX	UNIT
V_O	Output voltage swing	V_{CC} = ±15 V	R_L = 250 Ω	±11.5	±13		V
		V_{CC} = ±5 V	R_L = 150 Ω	±3.2	±3.5		
		V_{CC} = ±15 V	R_L = 1 kΩ	±13	±13.6		V
		V_{CC} = ±5 V		±3.5	±3.8		
I_O	Output current‡	V_{CC} = ±15 V	R_L = 20 Ω	80	100		mA
		V_{CC} = ±5 V		50	65		
I_{SC}	Short-circuit current‡	V_{CC} = ±15 V			150		mA
R_O	Output resistance	Open loop			13		Ω

† Full range = 0°C to 70°C for C suffix and −40°C to 85°C for I suffix

‡ Observe power dissipation ratings to keep the junction temperature below the absolute maximum rating when the output is heavily loaded or shorted. See the absolute maximum ratings section of this data sheet for more information.

power supply

PARAMETER		TEST CONDITIONS†		MIN	TYP	MAX	UNIT
V_{CC}	Supply voltage operating range	Dual supply		±4.5		±16.5	V
		Single supply		9		33	
I_{CC}	Supply current (per amplifier)	V_{CC} = ±15 V	T_A = 25°C		8	9.5	mA
			T_A = full range			11	
		V_{CC} = ±5 V	T_A = 25°C		7	8.5	
			T_A = full range			10	
PSRR	Power supply rejection ratio	V_{CC} = ±5 V or ±15 V	T_A = 25°C	75	84		dB
			T_A = full range	70			

† Full range = 0°C to 70°C for C suffix and −40°C to 85°C for I suffix

TYPICAL CHARACTERISTICS

OPEN LOOP GAIN AND PHASE RESPONSE vs FREQUENCY

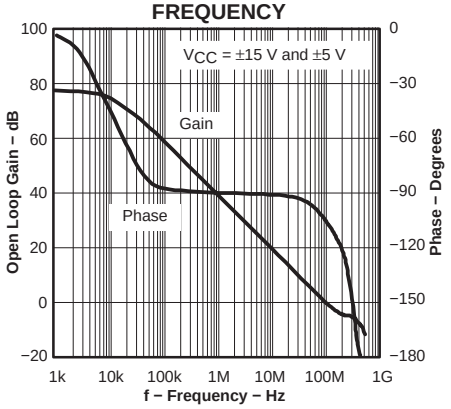


Figure 3

OUTPUT AMPLITUDE vs FREQUENCY

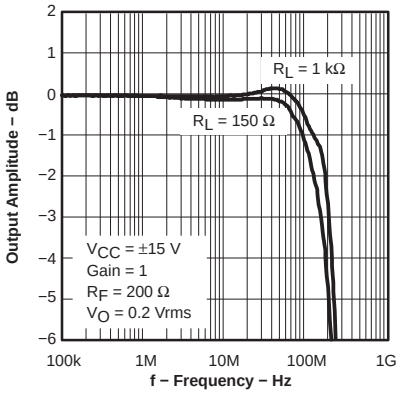


Figure 4

OUTPUT AMPLITUDE vs FREQUENCY

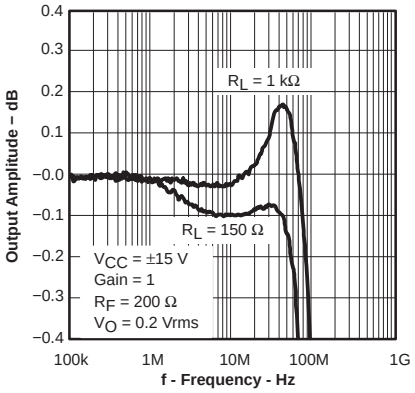


Figure 5

OUTPUT AMPLITUDE vs FREQUENCY

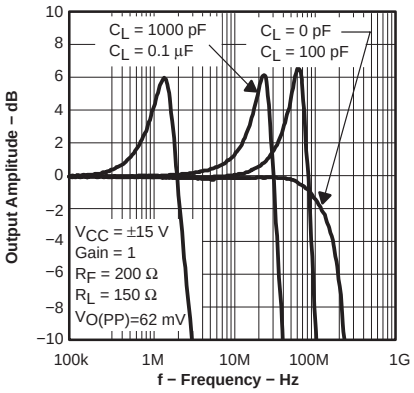


Figure 6

OUTPUT AMPLITUDE vs FREQUENCY

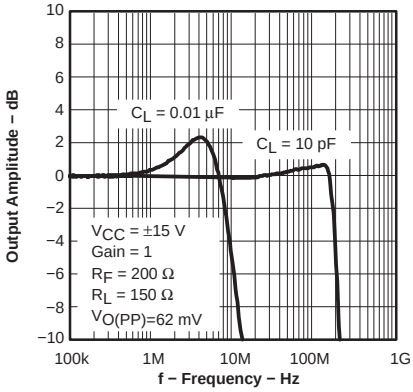


Figure 7

OUTPUT AMPLITUDE vs FREQUENCY

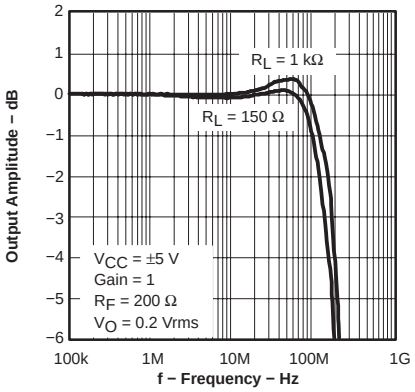


Figure 8

OUTPUT AMPLITUDE vs FREQUENCY

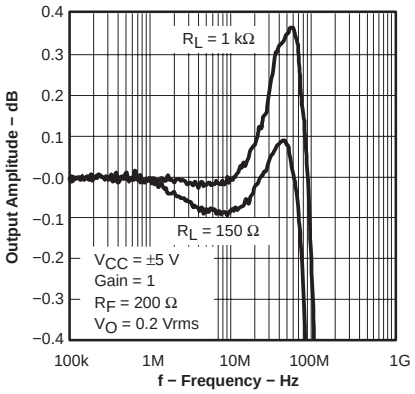


Figure 9

OUTPUT AMPLITUDE vs FREQUENCY

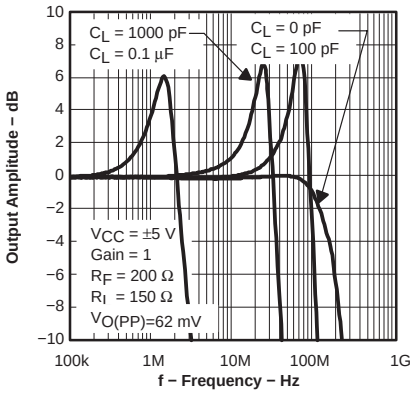


Figure 10

OUTPUT AMPLITUDE vs FREQUENCY

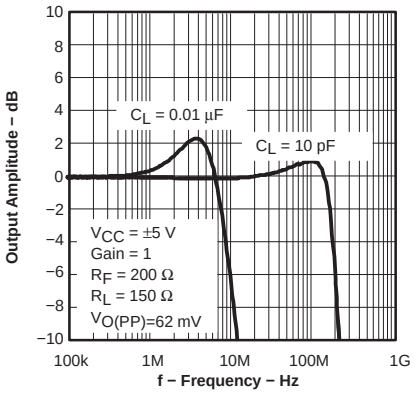


Figure 11

TYPICAL CHARACTERISTICS

OUTPUT AMPLITUDE vs FREQUENCY

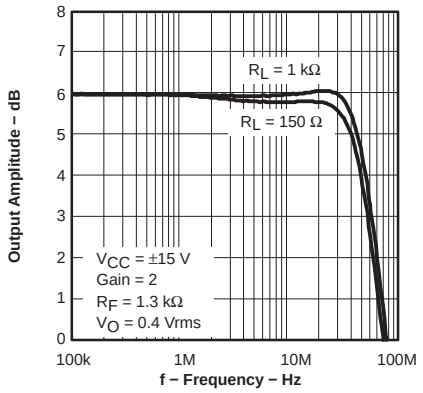


Figure 12

OUTPUT AMPLITUDE vs FREQUENCY

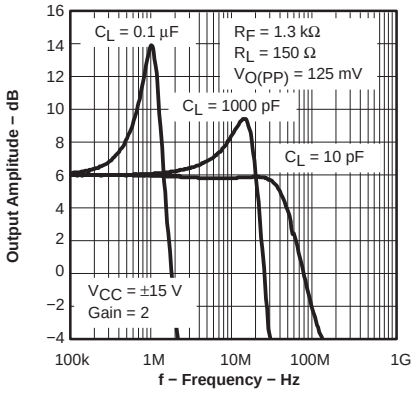


Figure 13

OUTPUT AMPLITUDE vs FREQUENCY

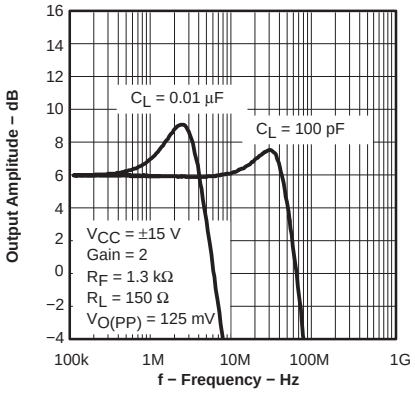


Figure 14

OUTPUT AMPLITUDE vs FREQUENCY

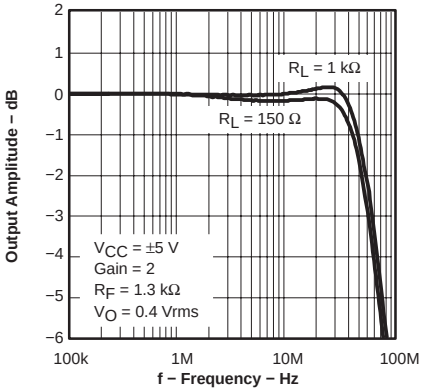


Figure 15

OUTPUT AMPLITUDE vs FREQUENCY

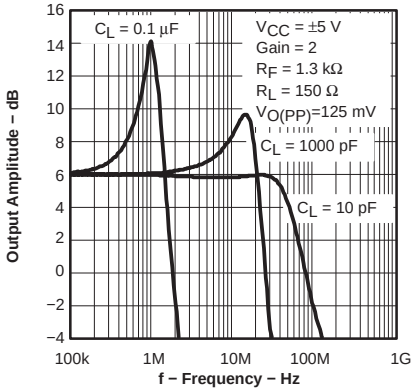


Figure 16

OUTPUT AMPLITUDE vs FREQUENCY

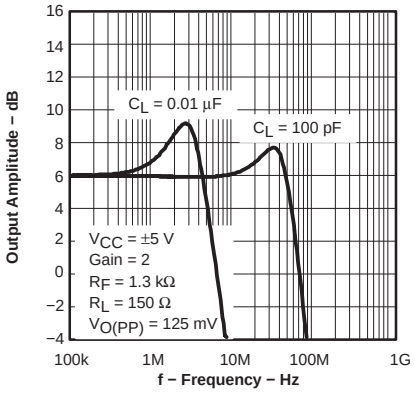


Figure 17

OUTPUT AMPLITUDE vs FREQUENCY

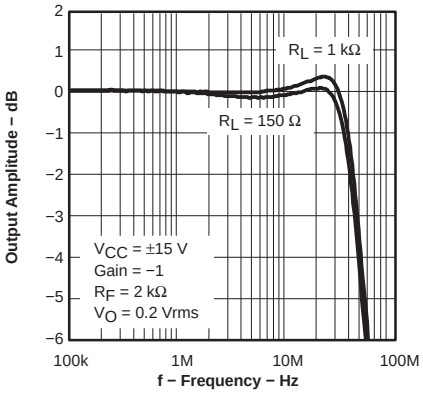


Figure 18

OUTPUT AMPLITUDE vs FREQUENCY

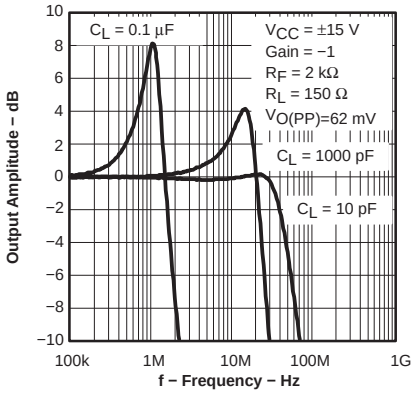


Figure 19

OUTPUT AMPLITUDE vs FREQUENCY

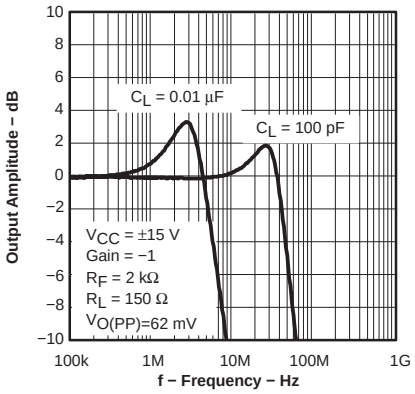


Figure 20

TYPICAL CHARACTERISTICS

OUTPUT AMPLITUDE vs FREQUENCY

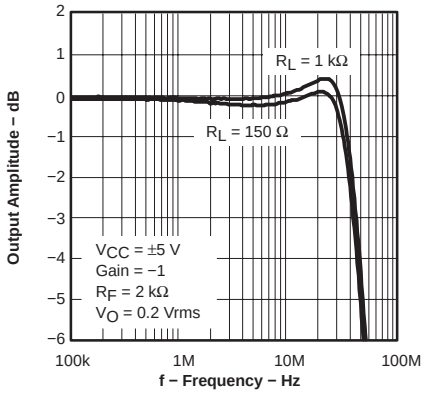


Figure 21

OUTPUT AMPLITUDE vs FREQUENCY

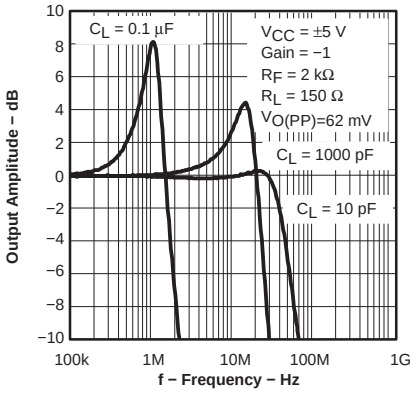


Figure 22

OUTPUT AMPLITUDE vs FREQUENCY

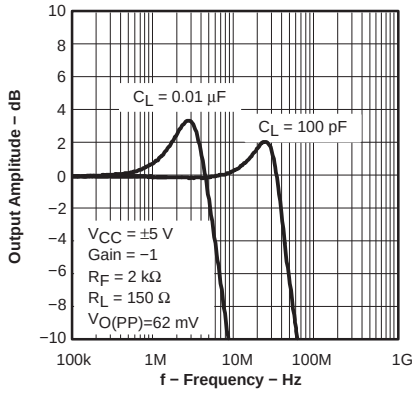


Figure 23

OUTPUT OVERSHOOT vs CAPACITIVE LOAD

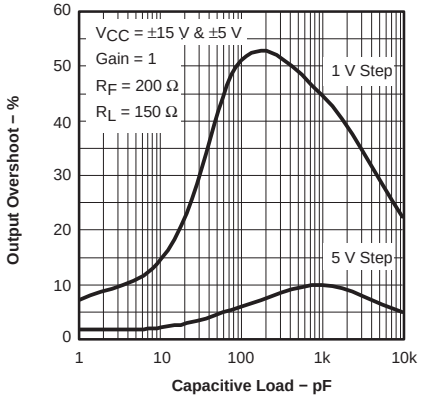


Figure 24

OUTPUT OVERSHOOT vs CAPACITIVE LOAD

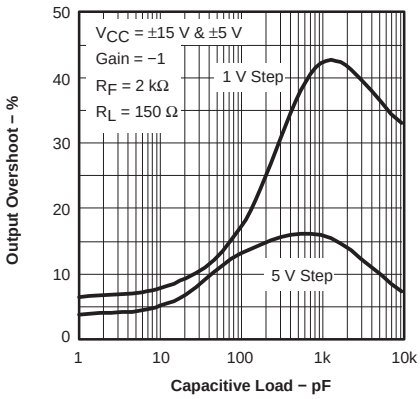


Figure 25

TOTAL HARMONIC DISTORTION vs FREQUENCY

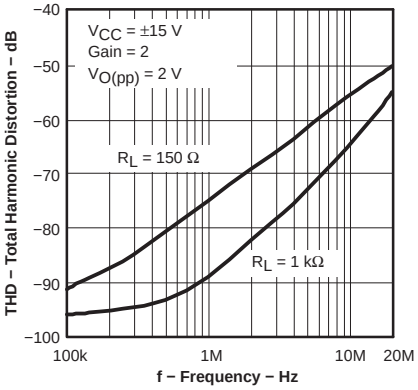


Figure 26

DISTORTION vs FREQUENCY

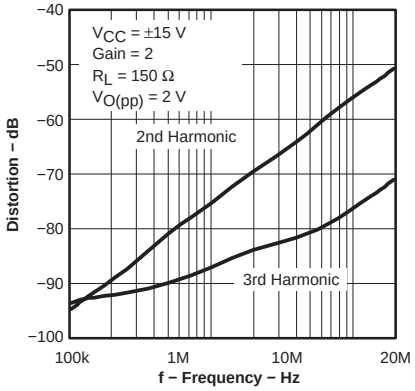


Figure 27

DISTORTION vs FREQUENCY

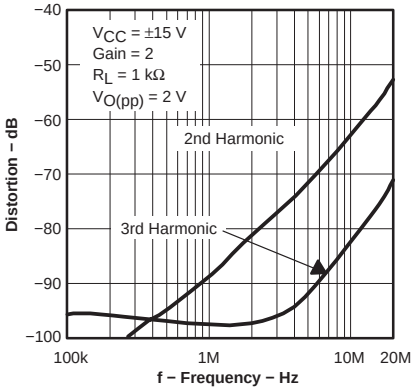


Figure 28

DISTORTION vs FREQUENCY

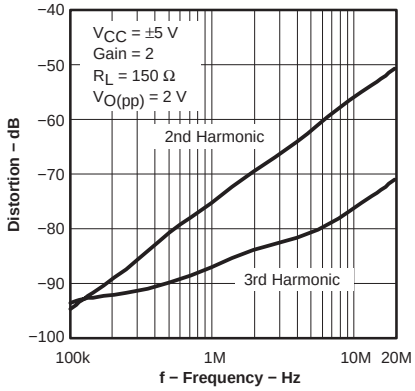


Figure 29

TYPICAL CHARACTERISTICS

DISTORTION vs FREQUENCY

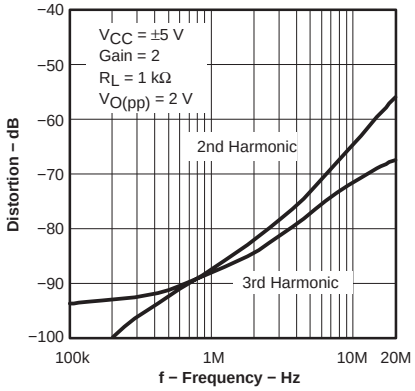


Figure 30

DISTORTION vs OUTPUT VOLTAGE

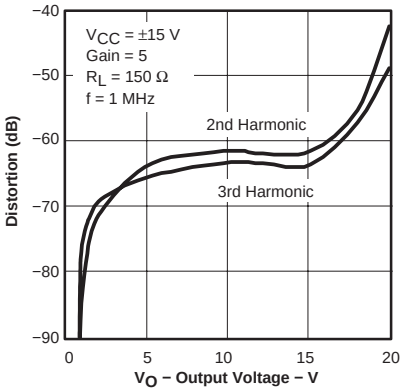


Figure 31

DISTORTION vs OUTPUT VOLTAGE

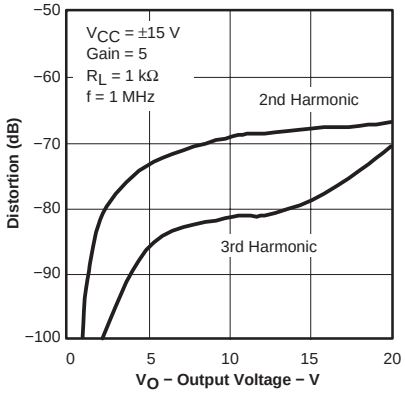


Figure 32

DIFFERENTIAL GAIN vs NUMBER OF 150-Ω LOADS

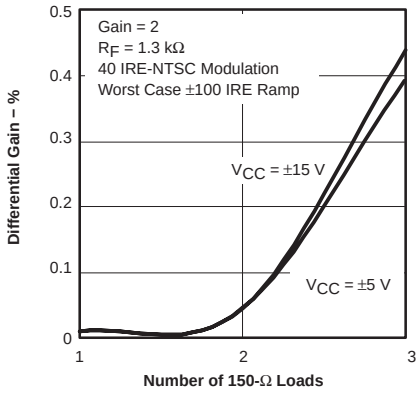


Figure 33

DIFFERENTIAL PHASE vs NUMBER OF 150-Ω LOADS

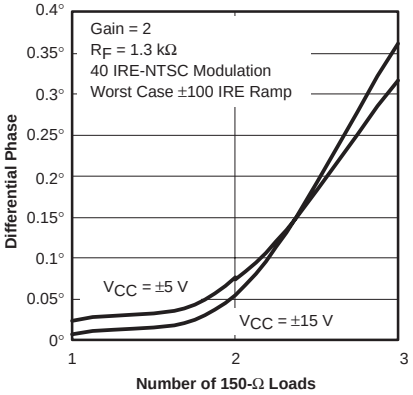


Figure 34

DIFFERENTIAL GAIN vs NUMBER OF 150-Ω LOADS

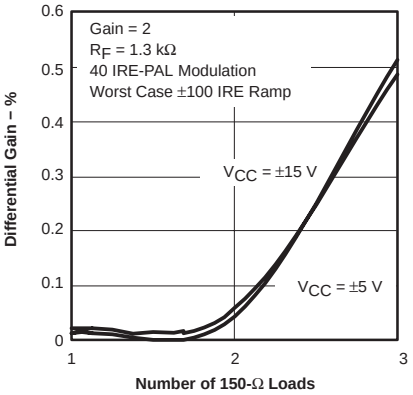


Figure 35

DIFFERENTIAL PHASE vs NUMBER OF 150-Ω LOADS

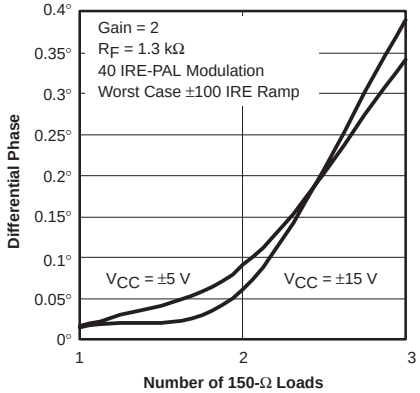


Figure 36

CLOSED-LOOP OUTPUT IMPEDANCE vs FREQUENCY

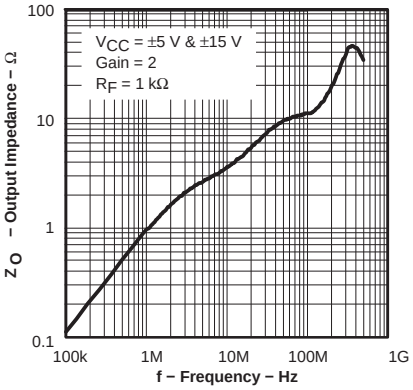


Figure 37

PSRR vs FREQUENCY

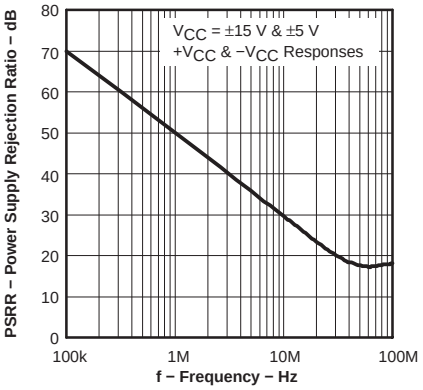


Figure 38

TYPICAL CHARACTERISTICS

CMRR vs FREQUENCY

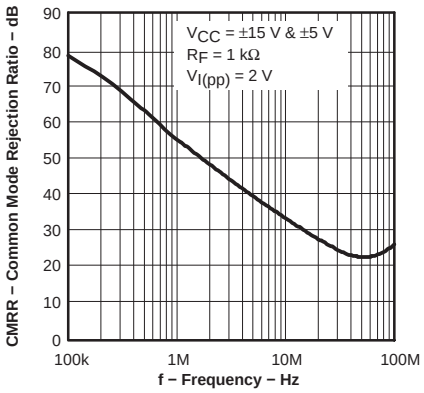


Figure 39

CROSSTALK vs FREQUENCY

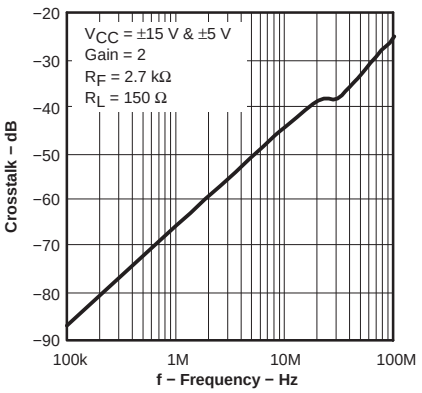


Figure 40

VOLTAGE & CURRENT NOISE vs FREQUENCY

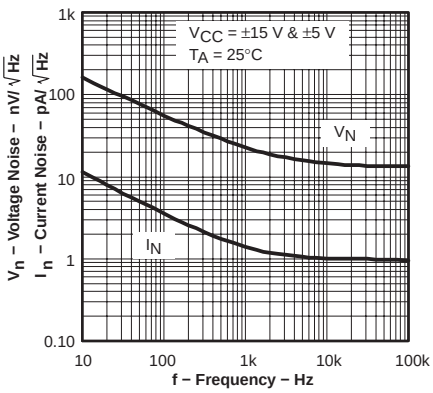


Figure 41

SLEW RATE vs FREE-AIR TEMPERATURE

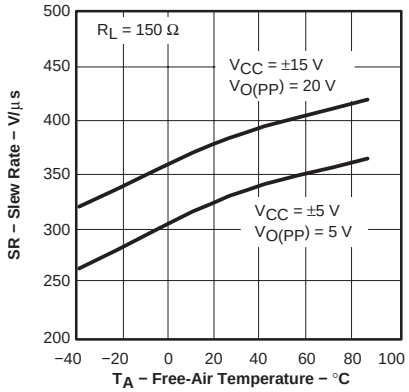


Figure 42

SETTING TIME vs OUTPUT STEP

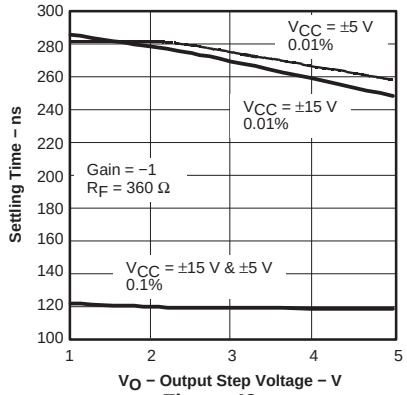


Figure 43

INPUT OFFSET VOLTAGE vs FREE-AIR TEMPERATURE

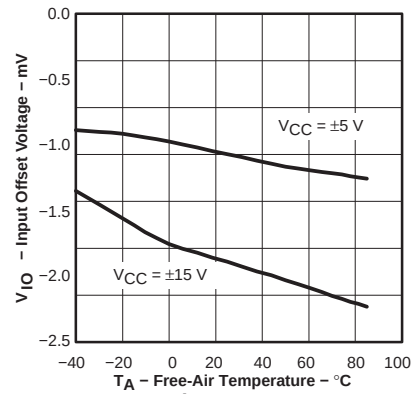


Figure 44

INPUT BIAS CURRENT vs FREE-AIR TEMPERATURE

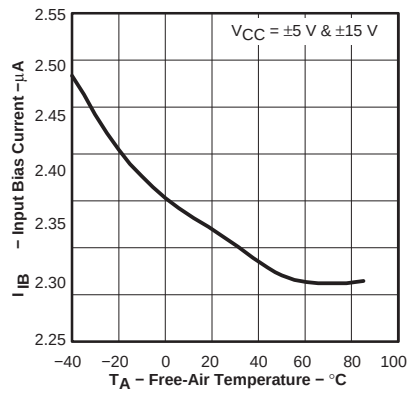


Figure 45

COMMON-MODE INPUT VOLTAGE vs SUPPLY VOLTAGE

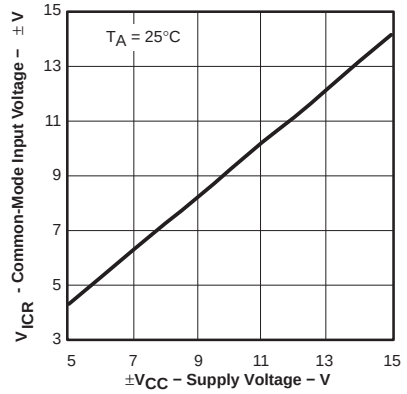


Figure 46

OUTPUT VOLTAGE vs SUPPLY VOLTAGE

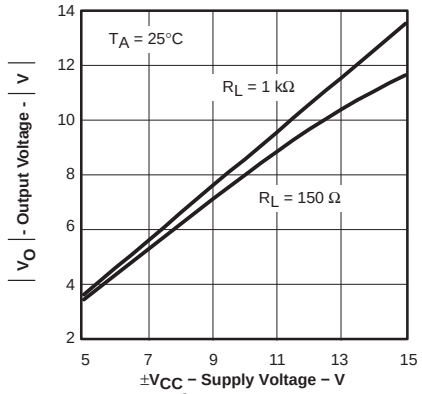


Figure 47

TYPICAL CHARACTERISTICS

OUTPUT VOLTAGE vs FREE-AIR TEMPERATURE

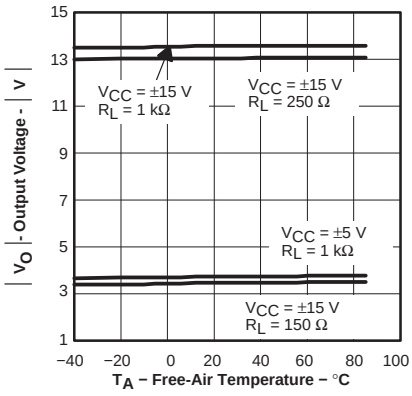


Figure 48

SUPPLY CURRENT vs SUPPLY VOLTAGE

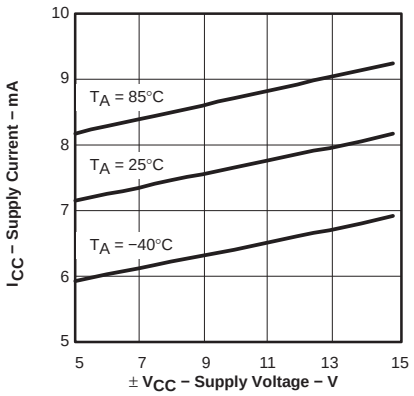


Figure 49

1-V FALLING EDGE RESPONSE

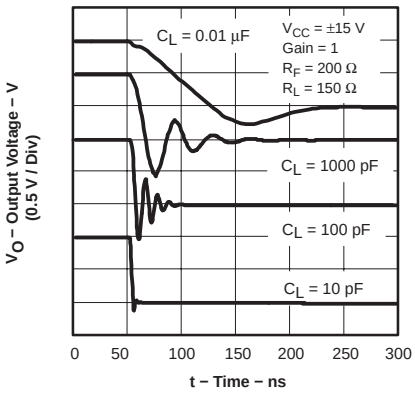


Figure 50

1-V FALLING EDGE RESPONSE

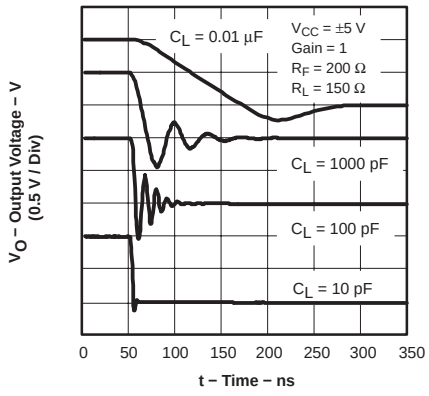


Figure 51

5-V FALLING EDGE RESPONSE

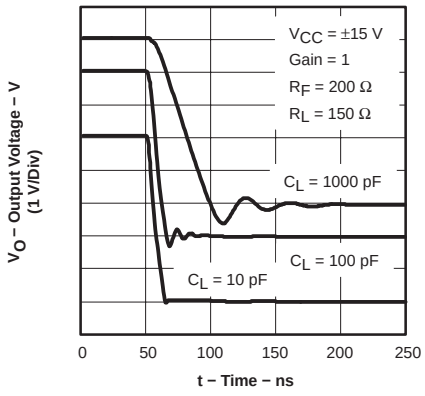


Figure 52

5-V FALLING EDGE RESPONSE

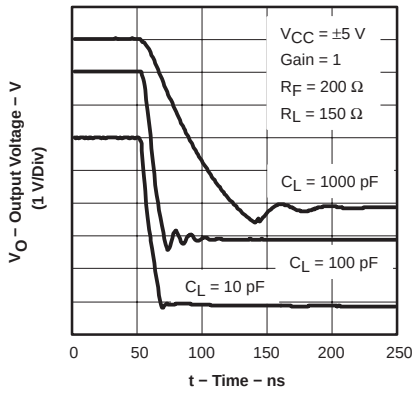


Figure 53

5-V AND 1-V STEP RESPONSE

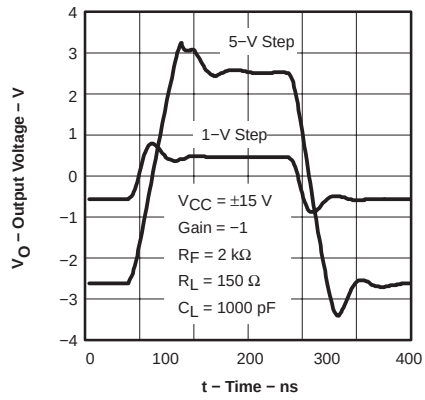


Figure 54

5-V AND 1-V STEP RESPONSE

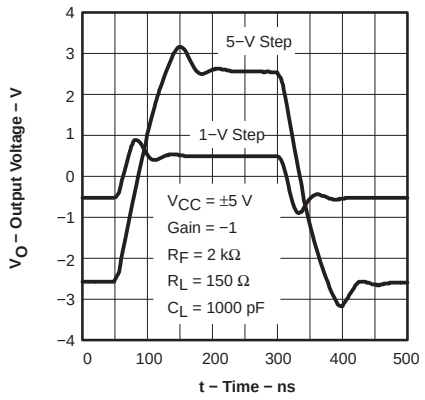


Figure 55

CAPACITIVE LOAD RESPONSE

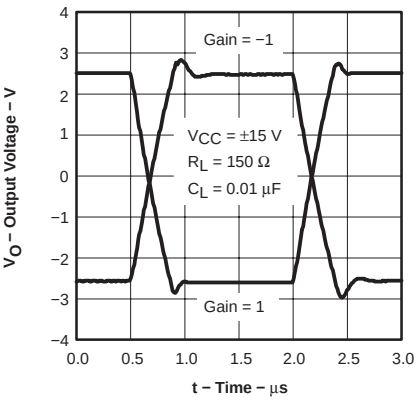


Figure 56

TYPICAL CHARACTERISTICS

CAPACITIVE LOAD RESPONSE

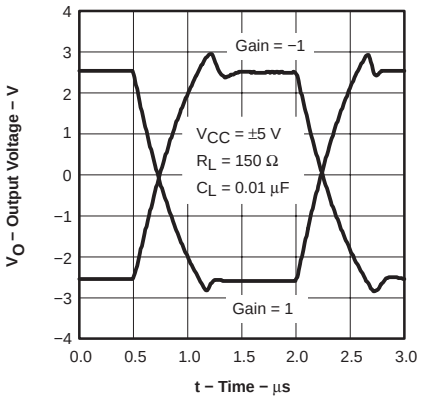


Figure 57

1-VOLT STEP RESPONSE

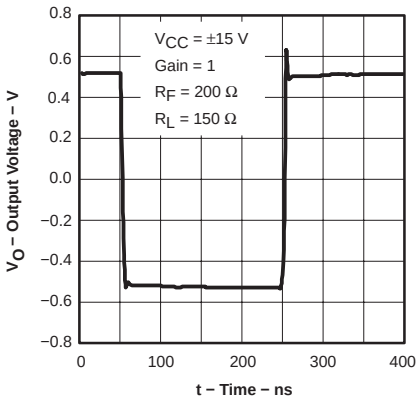


Figure 58

1-VOLT STEP RESPONSE

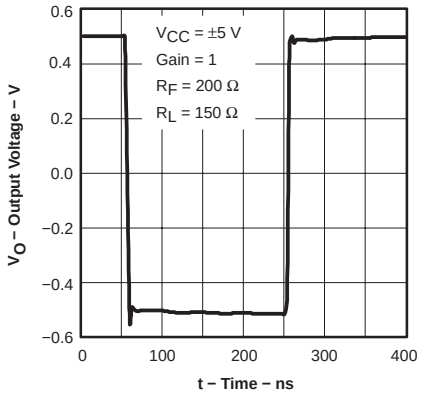


Figure 59

20-VOLT STEP RESPONSE

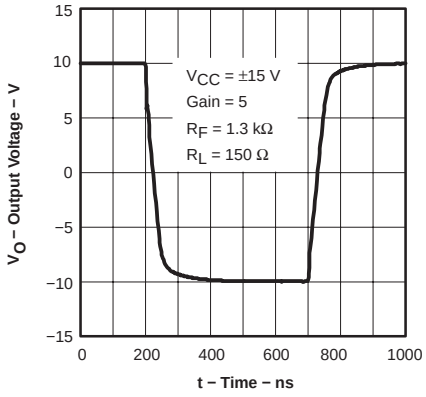


Figure 60

5-V STEP RESPONSE

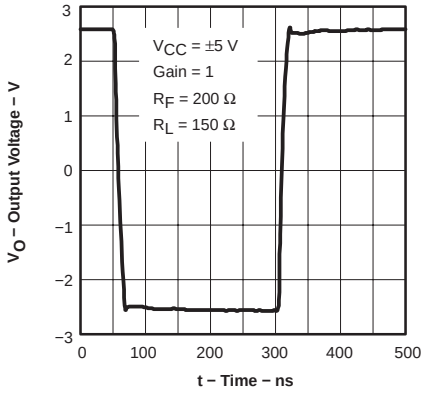


Figure 61

APPLICATION INFORMATION

theory of operation

The THS404x is a high-speed, operational amplifier configured in a voltage feedback architecture. It is built using a 30-V, dielectrically isolated, complementary bipolar process with NPN and PNP transistors possessing f_Ts of several GHz. This results in an exceptionally high performance amplifier that has a wide bandwidth, high slew rate, fast settling time, and low distortion. A simplified schematic is shown in Figure 62.

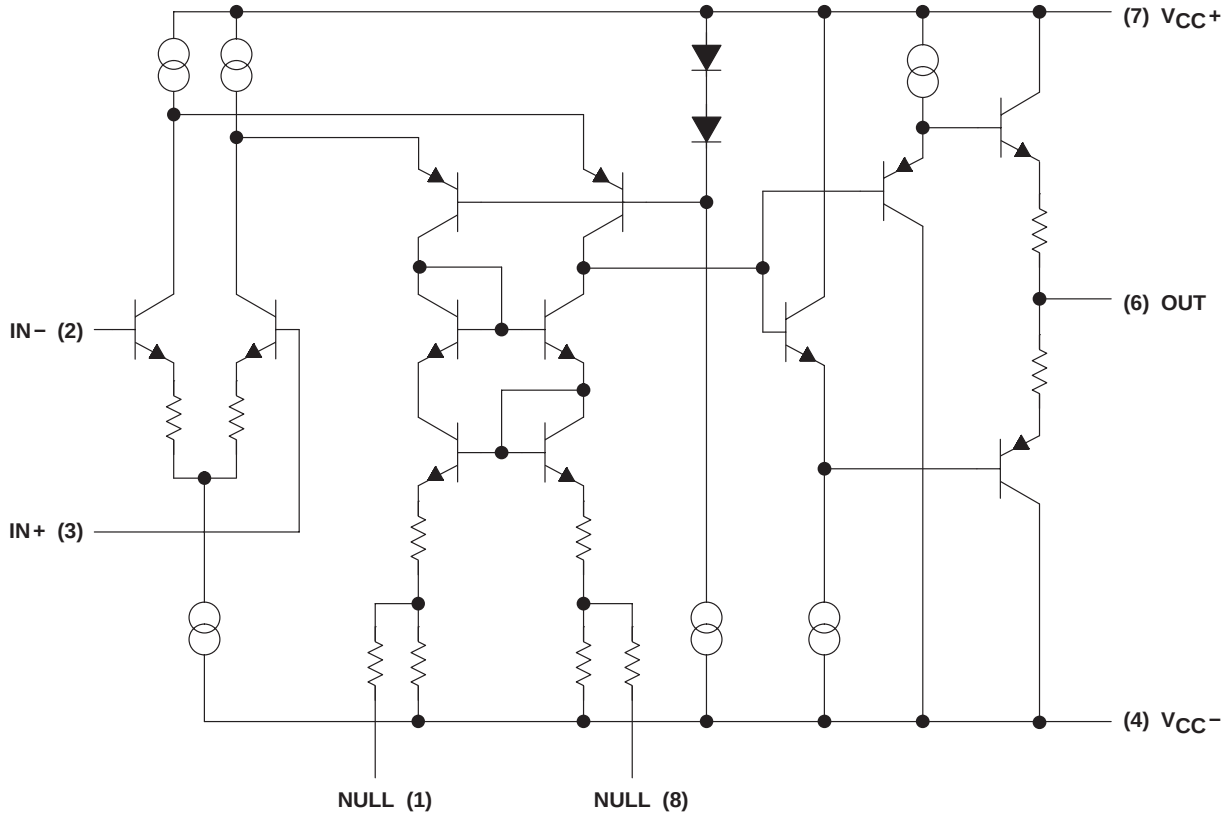


Figure 62. THS4041 Simplified Schematic

noise calculations and noise figure

Noise can cause errors on very small signals. This is especially true when amplifying small signals, where signal-to-noise ration (SNR) is very important. The noise model for the THS404x is shown in Figure 63. This model includes all of the noise sources as follows:

- e_n = Amplifier internal voltage noise (nV/$\sqrt{Hz}$)
- IN+ = Noninverting current noise (pA/$\sqrt{Hz}$)
- IN– = Inverting current noise (pA/$\sqrt{Hz}$)
- e_{Rx} = Thermal voltage noise associated with each resistor (e_{Rx} = 4 kTR_x)

APPLICATION INFORMATION

noise calculations and noise figure (continued)

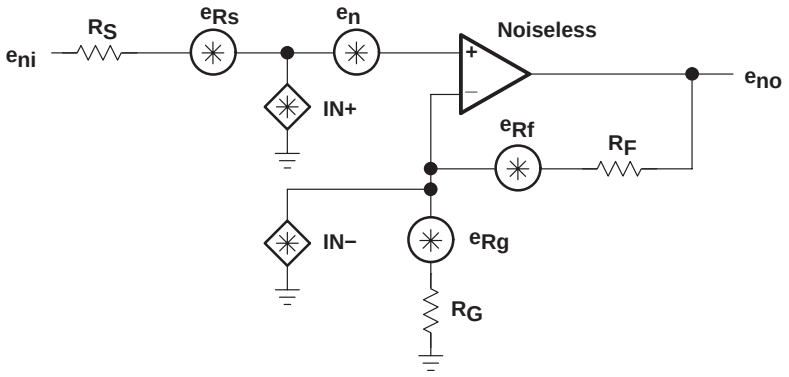


Figure 63. Noise Model

The total equivalent input noise density (e_{ni}) is calculated by using the following equation:

$$e_{ni} = \sqrt{(e_n)^2 + \left(IN + \times R_S\right)^2 + \left(IN- \times \left(R_F \parallel R_G\right)\right)^2 + 4\,kTR_S + 4\,kT\left(R_F \parallel R_G\right)}$$

Where:

k = Boltzmann's constant = 1.380658×10^{-23}
T = Temperature in degrees Kelvin (273 +°C)
$R_F \parallel R_G$ = Parallel resistance of R_F and R_G

To get the equivalent output noise of the amplifier, just multiply the equivalent input noise density (e_{ni}) by the overall amplifier gain (A_V).

$$e_{no} = e_{ni}\,A_V = e_{ni}\left(1 + \frac{R_F}{R_G}\right) \text{ (noninverting case)}$$

As the previous equations show, to keep noise at a minimum, small value resistors should be used. As the closed-loop gain is increased (by reducing R_G), the input noise is reduced considerably because of the parallel resistance term. This leads to the general conclusion that the most dominant noise sources are the source resistor (R_S) and the internal amplifier noise voltage (e_n). Because noise is summed in a root-mean-squares method, noise sources smaller than 25% of the largest noise source can be effectively ignored. This can greatly simplify the formula and make noise calculations much easier to calculate.

For more information on noise analysis, please refer to the *Noise Analysis* section in *Operational Amplifier Circuits Applications Report* (literature number SLVA043).

APPLICATION INFORMATION

noise calculations and noise figure (continued)

This brings up another noise measurement usually preferred in RF applications, the noise figure (NF). Noise figure is a measure of noise degradation caused by the amplifier. The value of the source resistance must be defined and is typically 50 Ω in RF applications.

$$NF = 10\log\left[\frac{e_{ni}^{2}}{\left(e_{Rs}\right)^{2}}\right]$$

Because the dominant noise components are generally the source resistance and the internal amplifier noise voltage, we can approximate noise figure as:

$$NF = 10\log\left[1 + \frac{\left[\left(e_{n}\right)^{2} + \left(IN + \times R_{S}\right)^{2}\right]}{4\,kTR_{S}}\right]$$

Figure 64 shows the noise figure graph for the THS404x.

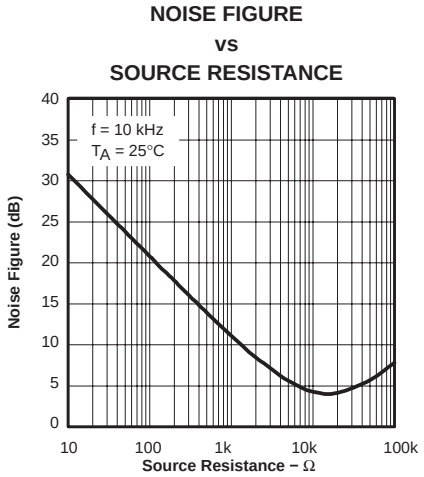


Figure 64. Noise Figure vs Source Resistance

APPLICATION INFORMATION

driving a capacitive load

Driving capacitive loads with high performance amplifiers is not a problem as long as certain precautions are taken. The first is to realize that the THS404x has been internally compensated to maximize its bandwidth and slew rate performance. Typically when the amplifier is compensated in this manner, capacitive loading directly on the output will decrease the device's phase margin, leading to high frequency ringing or oscillations. However, the THS404x has added internal circuitry that senses a capacitive load and adds extra compensation to the internal dominant pole. As the capacitive load increases, the amplifier remains stable. But, it is not uncommon to see a small amount of peaking in the frequency response. There are typically two ways to compensate for this. The first is to simply increase the gain of the amplifier. This helps by increasing the phase margin to keep peaking minimized. The second is to place an isolation resistor in series with the output of the amplifier, as shown in Figure 65. A minimum value of 20 Ω should work well for most applications. For example, in 75-Ω transmission systems, setting the series resistor value to 75 Ω both isolates any capacitance loading and provides the proper line impedance matching at the source end. For more information about driving capacitive loads, refer to the *Output Resistance and Capacitance* section of the *Parasitic Capacitance in Op Amp Circuits Application Report* (literature number: SLOA013).

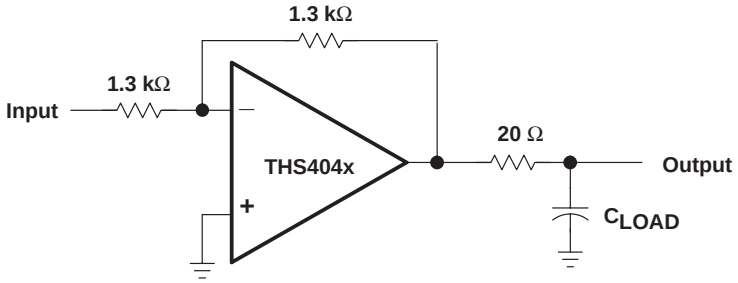


Figure 65. Driving a Capacitive Load for Extra Stability

offset nulling

The THS404x has very low input offset voltage for a high-speed amplifier. However, if additional correction is required, an offset nulling function has been provided on the THS4041. The input offset can be adjusted by placing a potentiometer between terminals 1 and 8 of the device and tying the wiper to the negative supply. This is shown in Figure 66.


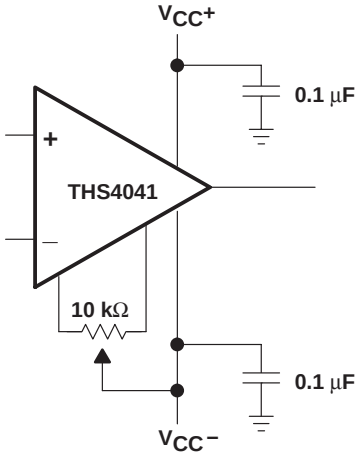


Figure 66. Offset Nulling Schematic

APPLICATION INFORMATION

offset voltage

The output offset voltage, (V_{OO}) is the sum of the input offset voltage (V_{IO}) and both input bias currents (I_{IB}) times the corresponding gains. The following schematic and formula can be used to calculate the output offset voltage:

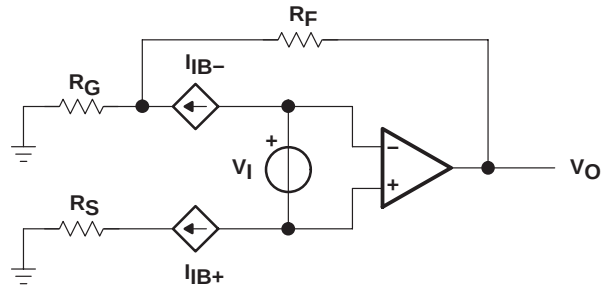

$$V_{OO} = V_{IO}\left(1 + \left(\frac{R_F}{R_G}\right)\right) \pm I_{IB+} R_S \left(1 + \left(\frac{R_F}{R_G}\right)\right) \pm I_{IB-} R_F$$

Figure 67. Output Offset Voltage Model

optimizing unity gain response

Internal frequency compensation of the THS404x was selected to provide very wideband performance yet still maintain stability when operated in a noninverting unity gain configuration. When amplifiers are compensated in this manner there is usually peaking in the closed loop response and some ringing in the step response for very fast input edges, depending upon the application. This is because a minimum phase margin is maintained for the G=+1 configuration. For optimum settling time and minimum ringing, a feedback resistor of 200 Ω should be used as shown in Figure 68. Additional capacitance can also be used in parallel with the feedback resistance if even finer optimization is required.

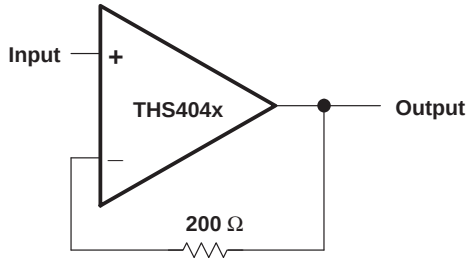


Figure 68. Noninverting, Unity Gain Schematic

APPLICATION INFORMATION

circuit layout considerations

To achieve the levels of high frequency performance of the THS404x, follow proper printed-circuit board high frequency design techniques. A general set of guidelines is given below. In addition, a THS404x evaluation board is available to use as a guide for layout or for evaluating the device performance.

- Ground planes − It is highly recommended that a ground plane be used on the board to provide all components with a low inductive ground connection. However, in the areas of the amplifier inputs and output, the ground plane can be removed to minimize the stray capacitance.
- Proper power supply decoupling − Use a 6.8-μF tantalum capacitor in parallel with a 0.1-μF ceramic capacitor on each supply terminal. It may be possible to share the tantalum among several amplifiers depending on the application, but a 0.1-μF ceramic capacitor should always be used on the supply terminal of every amplifier. In addition, the 0.1-μF capacitor should be placed as close as possible to the supply terminal. As this distance increases, the inductance in the connecting trace makes the capacitor less effective. The designer should strive for distances of less than 0.1 inches between the device power terminals and the ceramic capacitors.
- Sockets − Sockets are not recommended for high-speed operational amplifiers. The additional lead inductance in the socket pins will often lead to stability problems. Surface-mount packages soldered directly to the printed-circuit board is the best implementation.
- Short trace runs/compact part placements − Optimum high frequency performance is achieved when stray series inductance has been minimized. To realize this, the circuit layout should be made as compact as possible, thereby minimizing the length of all trace runs. Particular attention should be paid to the inverting input of the amplifier. Its length should be kept as short as possible. This will help to minimize stray capacitance at the input of the amplifier.
- Surface-mount passive components − Using surface-mount passive components is recommended for high frequency amplifier circuits for several reasons. First, because of the extremely low lead inductance of surface-mount components, the problem with stray series inductance is greatly reduced. Second, the small size of surface-mount components naturally leads to a more compact layout, thereby minimizing both stray inductance and capacitance. If leaded components are used, it is recommended that the lead lengths be kept as short as possible.

general PowerPAD design considerations


The THS404x is available packaged in a thermally-enhanced DGN package, which is a member of the PowerPAD family of packages. This package is constructed using a downset leadframe upon which the die is mounted [see Figure 69(a) and Figure 69(b)]. This arrangement results in the lead frame being exposed as a thermal pad on the underside of the package [see Figure 69(c)]. Because this thermal pad has direct thermal contact with the die, excellent thermal performance can be achieved by providing a good thermal path away from the thermal pad.

The PowerPAD package allows for both assembly and thermal management in one manufacturing operation. During the surface-mount solder operation (when the leads are being soldered), the thermal pad can also be soldered to a copper area underneath the package. Through the use of thermal paths within this copper area, heat can be conducted away from the package into either a ground plane or other heat dissipating device.

The PowerPAD package represents a breakthrough in combining the small area and ease of assembly of the surface mount with the, heretofore, awkward mechanical methods of heatsinking.

APPLICATION INFORMATION

general PowerPAD design considerations (continued)

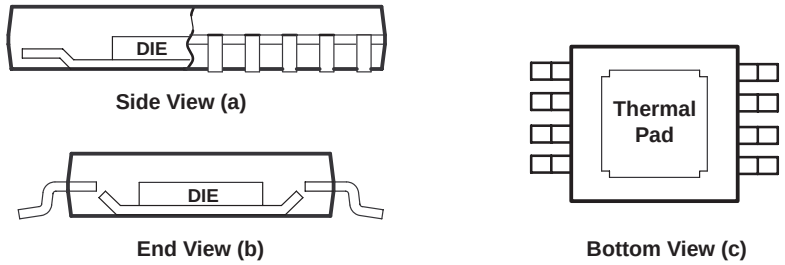

NOTE A: The thermal pad is electrically isolated from all terminals in the package.

Figure 69. Views of Thermally Enhanced DGN Package

Although there are many ways to properly heatsink this device, the following steps illustrate the recommended approach.

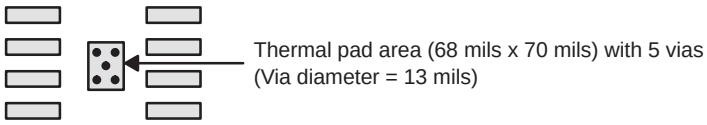


Figure 70. PowerPAD PCB Etch and Via Pattern

1. Prepare the PCB with a top side etch pattern as shown in Figure 70. There should be etch for the leads as well as etch for the thermal pad.
2. Place five holes in the area of the thermal pad. These holes should be 13 mils in diameter. Keep them small so that solder wicking through the holes is not a problem during reflow.
3. Additional vias may be placed anywhere along the thermal plane outside of the thermal pad area. This helps dissipate the heat generated by the THS404xDGN IC. These additional vias may be larger than the 13-mil diameter vias directly under the thermal pad. They can be larger because they are not in the thermal pad area to be soldered so that wicking is not a problem.
4. Connect all holes to the internal ground plane.
5. When connecting these holes to the ground plane, **do not** use the typical web or spoke via connection methodology. Web connections have a high thermal resistance connection that is useful for slowing the heat transfer during soldering operations. This makes the soldering of vias that have plane connections easier. In this application, however, low thermal resistance is desired for the most efficient heat transfer. Therefore, the holes under the THS404xDGN package should make their connection to the internal ground plane with a complete connection around the entire circumference of the plated-through hole.
6. The top-side solder mask should leave the terminals of the package and the thermal pad area with its five holes exposed. The bottom-side solder mask should cover the five holes of the thermal pad area. This prevents solder from being pulled away from the thermal pad area during the reflow process.
7. Apply solder paste to the exposed thermal pad area and all of the IC terminals.
8. With these preparatory steps in place, the THS404xDGN IC is simply placed in position and run through the solder reflow operation as any standard surface-mount component. This results in a part that is properly installed.

APPLICATION INFORMATION


general PowerPAD design considerations (continued)

The actual thermal performance achieved with the THS404xDGN in its PowerPAD package depends on the application. In the example above, if the size of the internal ground plane is approximately 3 inches × 3 inches, then the expected thermal coefficient, θ_{JA}, is about 58.4°C/W. For comparison, the non-PowerPAD version of the THS404x IC (SOIC) is shown. For a given θ_{JA}, the maximum power dissipation is shown in Figure 71 and is calculated by the following formula:

$$P_D = \left(\frac{T_{MAX} - T_A}{\theta_{JA}} \right)$$

Where:

P_D = Maximum power dissipation of THS404x IC (watts)
T_{MAX} = Absolute maximum junction temperature (150°C)
T_A = Free-ambient air temperature (°C)
$\theta_{JA} = \theta_{JC} + \theta_{CA}$
θ_{JC} = Thermal coefficient from junction to case (°C/W)
θ_{CA} = Thermal coefficient from case to ambient air (°C/W)

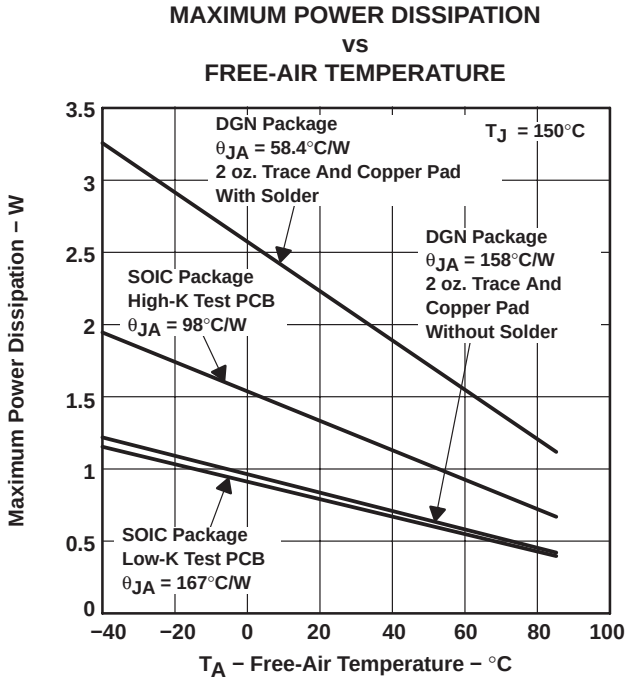

NOTE A: Results are with no air flow and PCB size = 3”× 3”

Figure 71. Maximum Power Dissipation vs Free-Air Temperature

More complete details of the PowerPAD installation process and thermal management techniques can be found in the Texas Instruments Technical Brief, *PowerPAD Thermally Enhanced Package.* This document can be found at the TI web site (www.ti.com) by searching on the key word PowerPAD. The document can also be ordered through your local TI sales office. Refer to literature number SLMA002 when ordering.

APPLICATION INFORMATION

general PowerPAD design considerations (continued)

The next consideration is the package constraints. The two sources of heat within an amplifier are quiescent power and output power. The designer should never forget about the quiescent heat generated within the device, especially mutiamplifier devices. Because these devices have linear output stages (Class A-B), most of the heat dissipation is at low output voltages with high output currents. Figure 72 to Figure 75 show this effect, along with the quiescent heat, with an ambient air temperature of 50°C. Obviously, as the ambient temperature increases, the limit lines shown will drop accordingly. The area under each respective limit line is considered the safe operating area. Any condition above this line will exceed the amplifier's limits and failure may result. When using V_{CC} = ±5 V, there is generally not a heat problem, even with SOIC packages. But, when using V_{CC} = ±15 V, the SOIC package is severely limited in the amount of heat it can dissipate. The other key factor when looking at these graphs is how the devices are mounted on the PCB. The PowerPAD devices are extremely useful for heat dissipation. But, the device should always be soldered to a copper plane to fully use the heat dissipation properties of the PowerPAD. The SOIC package, on the other hand, is highly dependent on how it is mounted on the PCB. As more trace and copper area is placed around the device, θ_{JA} decreases and the heat dissipation capability increases. The currents and voltages shown in these graphs are for the total package. For the dual amplifier package (THS4042), the sum of the RMS output currents and voltages should be used to choose the proper package. The graphs shown assume that both amplifier's outputs are identical.

THS4041
MAXIMUM RMS OUTPUT CURRENT
vs
RMS OUTPUT VOLTAGE DUE TO THERMAL LIMITS

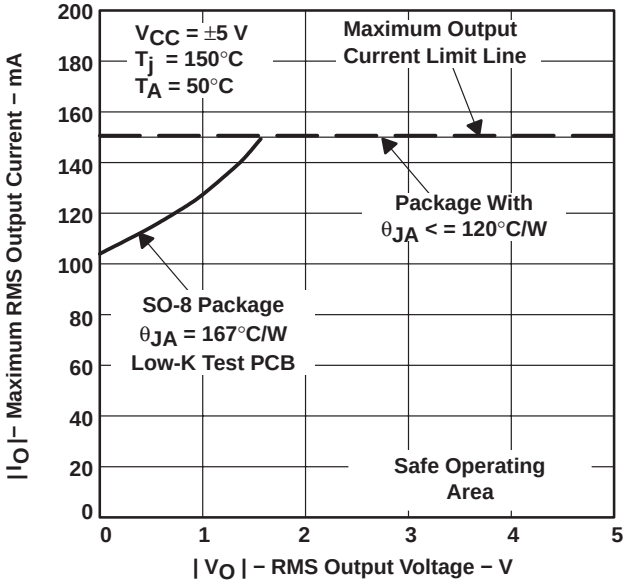


Figure 72

THS4041
MAXIMUM RMS OUTPUT CURRENT
vs
RMS OUTPUT VOLTAGE DUE TO THERMAL LIMITS

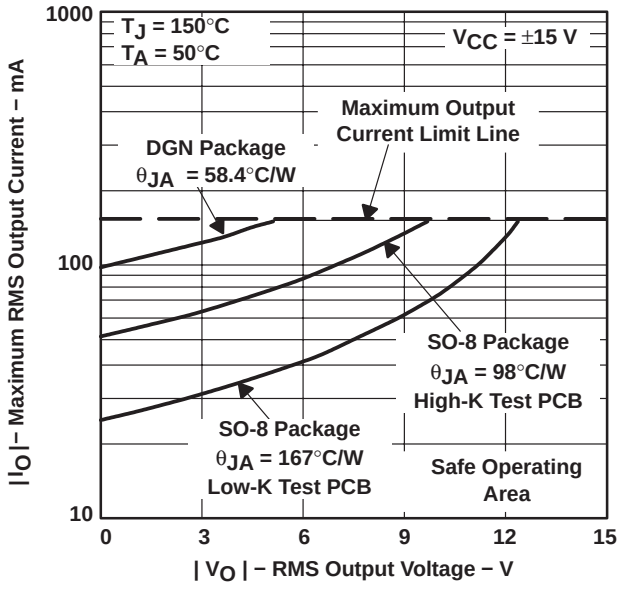


Figure 73

APPLICATION INFORMATION

general PowerPAD design considerations (continued)

THS4042
MAXIMUM RMS OUTPUT CURRENT
vs
RMS OUTPUT VOLTAGE DUE TO THERMAL LIMITS

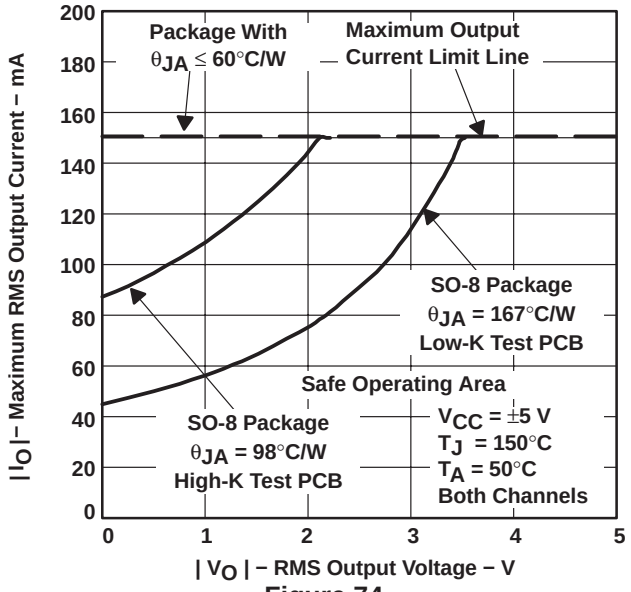


Figure 74

THS4042
MAXIMUM RMS OUTPUT CURRENT
vs
RMS OUTPUT VOLTAGE DUE TO THERMAL LIMITS

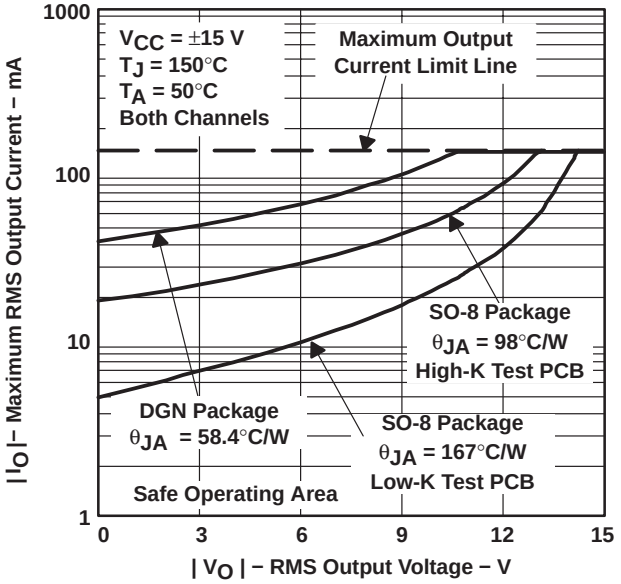


Figure 75

APPLICATION INFORMATION

evaluation board

An evaluation board is available for the THS4041 (literature number SLOP219) and THS4042 (literature number SLOP233). This board has been configured for very low parasitic capacitance in order to realize the full performance of the amplifier. A schematic of the evaluation board is shown in Figure 76. The circuitry has been designed so that the amplifier may be used in either an inverting or noninverting configuration. For more information, please refer to the *THS4041 EVM User's Guide* or the *THS4042 EVM User's Guide*. To order the evaluation board, contact your local TI sales office or distributor.

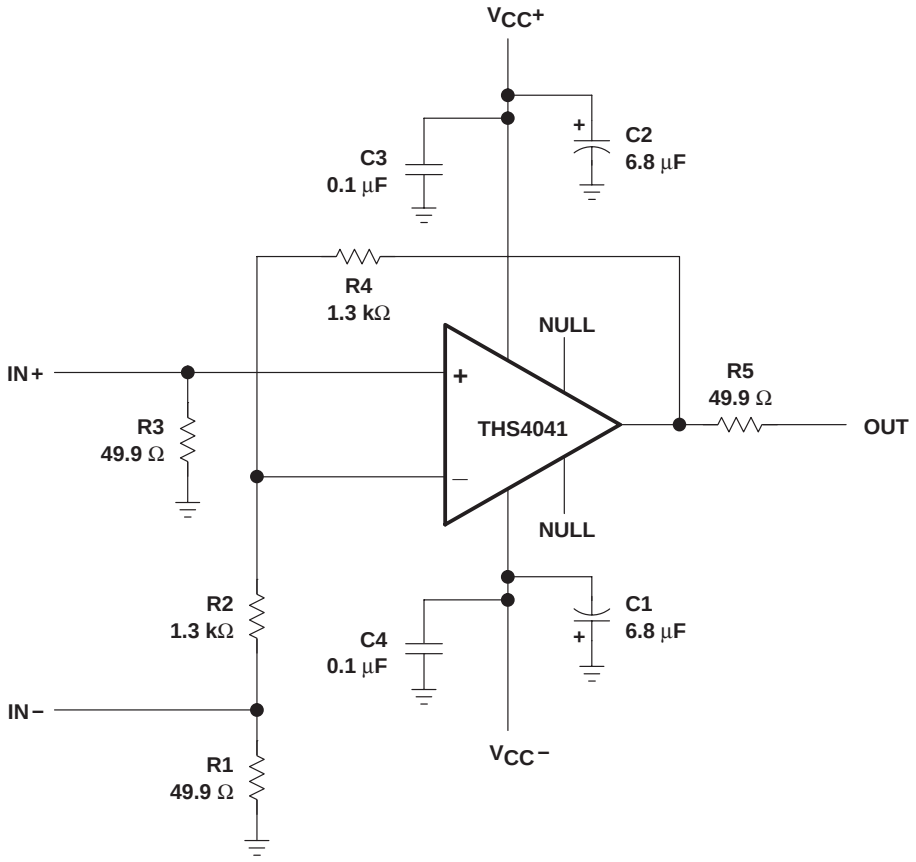


Figure 76. THS4041 Evaluation Board

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
THS4041CD	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	4041C
THS4041CD.A	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	4041C
THS4041CDGNR	Active	Production	HVSSOP (DGN) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	ACO
THS4041CDGNR.A	Active	Production	HVSSOP (DGN) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	ACO
THS4041CDR	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	4041C
THS4041CDR.A	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	4041C
THS4041ID	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	4041I
THS4041ID.A	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	4041I
THS4041IDGNR	Active	Production	HVSSOP (DGN) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ACP
THS4041IDGNR.A	Active	Production	HVSSOP (DGN) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ACP
THS4042CD	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	4042C
THS4042CD.A	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	4042C
THS4042CDG4	Active	Production	SOIC (D) | 8	75 | TUBE	-	Call TI	Call TI	0 to 70	
THS4042CDGN	Active	Production	HVSSOP (DGN) | 8	80 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-	ACC
THS4042CDGN.A	Active	Production	HVSSOP (DGN) | 8	80 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ACC
THS4042CDGNR	Active	Production	HVSSOP (DGN) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-	ACC
THS4042CDGNR.A	Active	Production	HVSSOP (DGN) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ACC
THS4042ID	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	4042I
THS4042ID.A	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	4042I
THS4042IDGN	Active	Production	HVSSOP (DGN) | 8	80 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-	ACD
THS4042IDGN.A	Active	Production	HVSSOP (DGN) | 8	80 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ACD
THS4042IDGNR	Active	Production	HVSSOP (DGN) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-	ACD
THS4042IDGNR.A	Active	Production	HVSSOP (DGN) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ACD

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF THS4041 :


- Automotive : THS4041-Q1

NOTE: Qualified Version Definitions:


- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

TAPE AND REEL INFORMATION

REEL DIMENSIONS

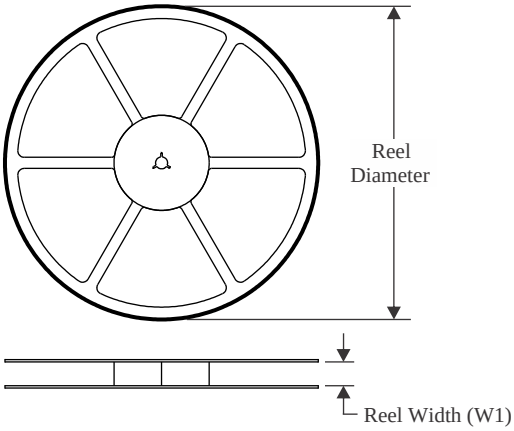


TAPE DIMENSIONS

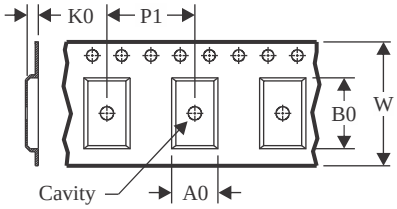

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

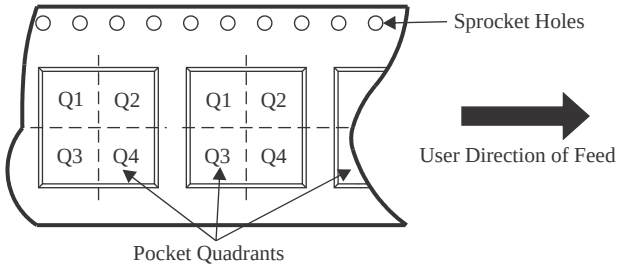

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
THS4041CDGNR	HVSSOP	DGN	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
THS4041CDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
THS4041IDGNR	HVSSOP	DGN	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
THS4042CDGNR	HVSSOP	DGN	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
THS4042IDGNR	HVSSOP	DGN	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1


TAPE AND REEL BOX DIMENSIONS

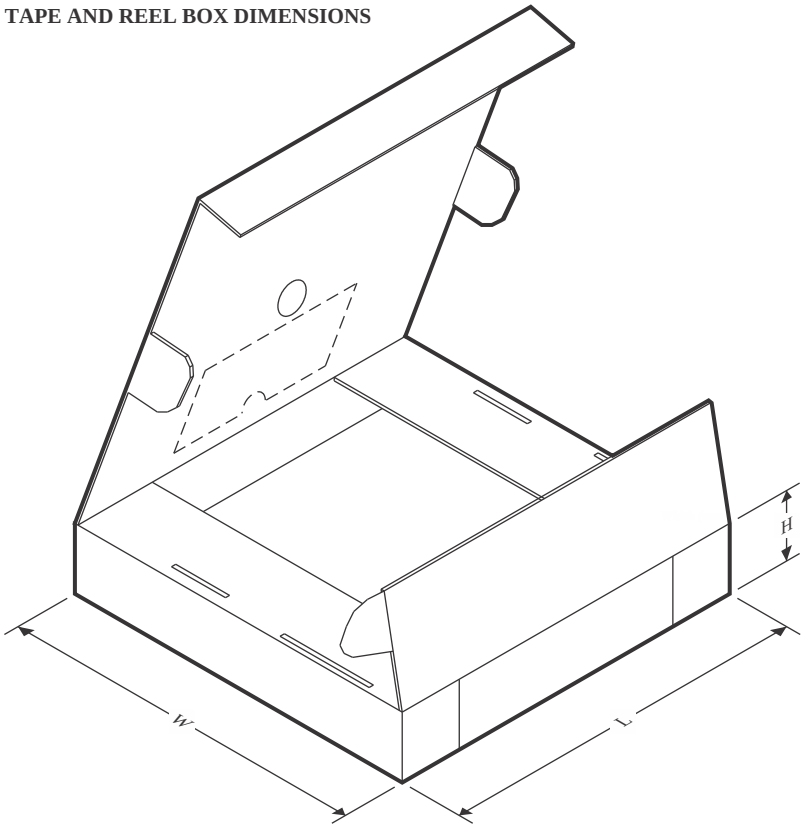

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
THS4041CDGNR	HVSSOP	DGN	8	2500	358.0	335.0	35.0
THS4041CDR	SOIC	D	8	2500	350.0	350.0	43.0
THS4041IDGNR	HVSSOP	DGN	8	2500	358.0	335.0	35.0
THS4042CDGNR	HVSSOP	DGN	8	2500	358.0	335.0	35.0
THS4042IDGNR	HVSSOP	DGN	8	2500	358.0	335.0	35.0

TUBE

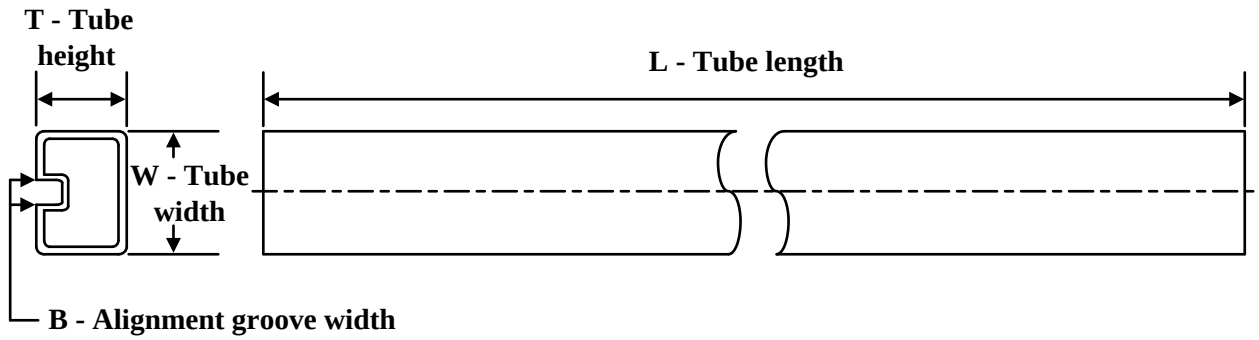

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
THS4041CD	D	SOIC	8	75	505.46	6.76	3810	4
THS4041CD.A	D	SOIC	8	75	505.46	6.76	3810	4
THS4041ID	D	SOIC	8	75	505.46	6.76	3810	4
THS4041ID.A	D	SOIC	8	75	505.46	6.76	3810	4
THS4042CD	D	SOIC	8	75	505.46	6.76	3810	4
THS4042CD.A	D	SOIC	8	75	505.46	6.76	3810	4
THS4042ID	D	SOIC	8	75	505.46	6.76	3810	4
THS4042ID.A	D	SOIC	8	75	505.46	6.76	3810	4

GENERIC PACKAGE VIEW


DGN 8

PowerPAD™ HVSSOP - 1.1 mm max height

3 x 3, 0.65 mm pitch

SMALL OUTLINE PACKAGE


This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

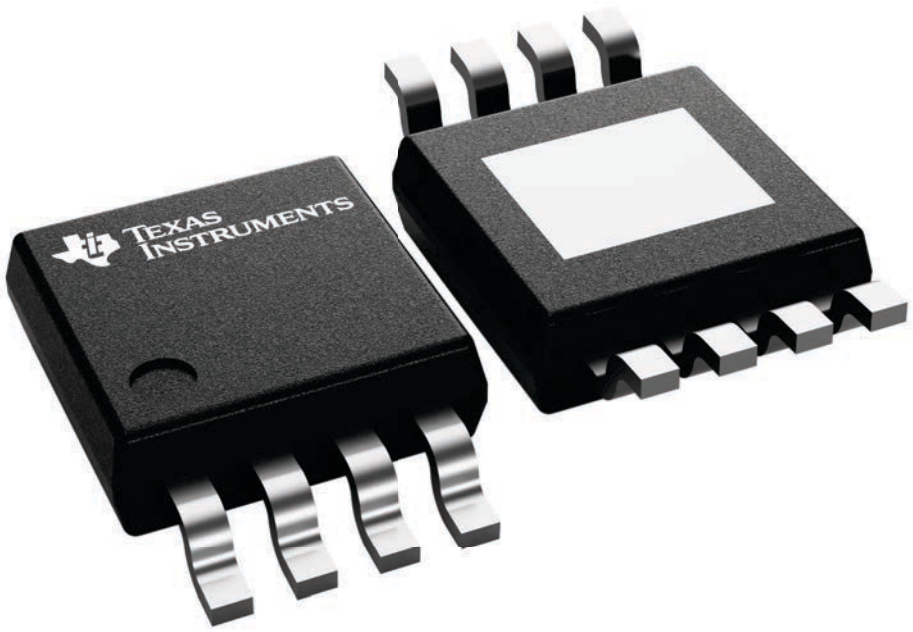

4225482/B


PACKAGE OUTLINE

DGN0008D



PowerPAD™ VSSOP - 1.1 mm max height


SMALL OUTLINE PACKAGE

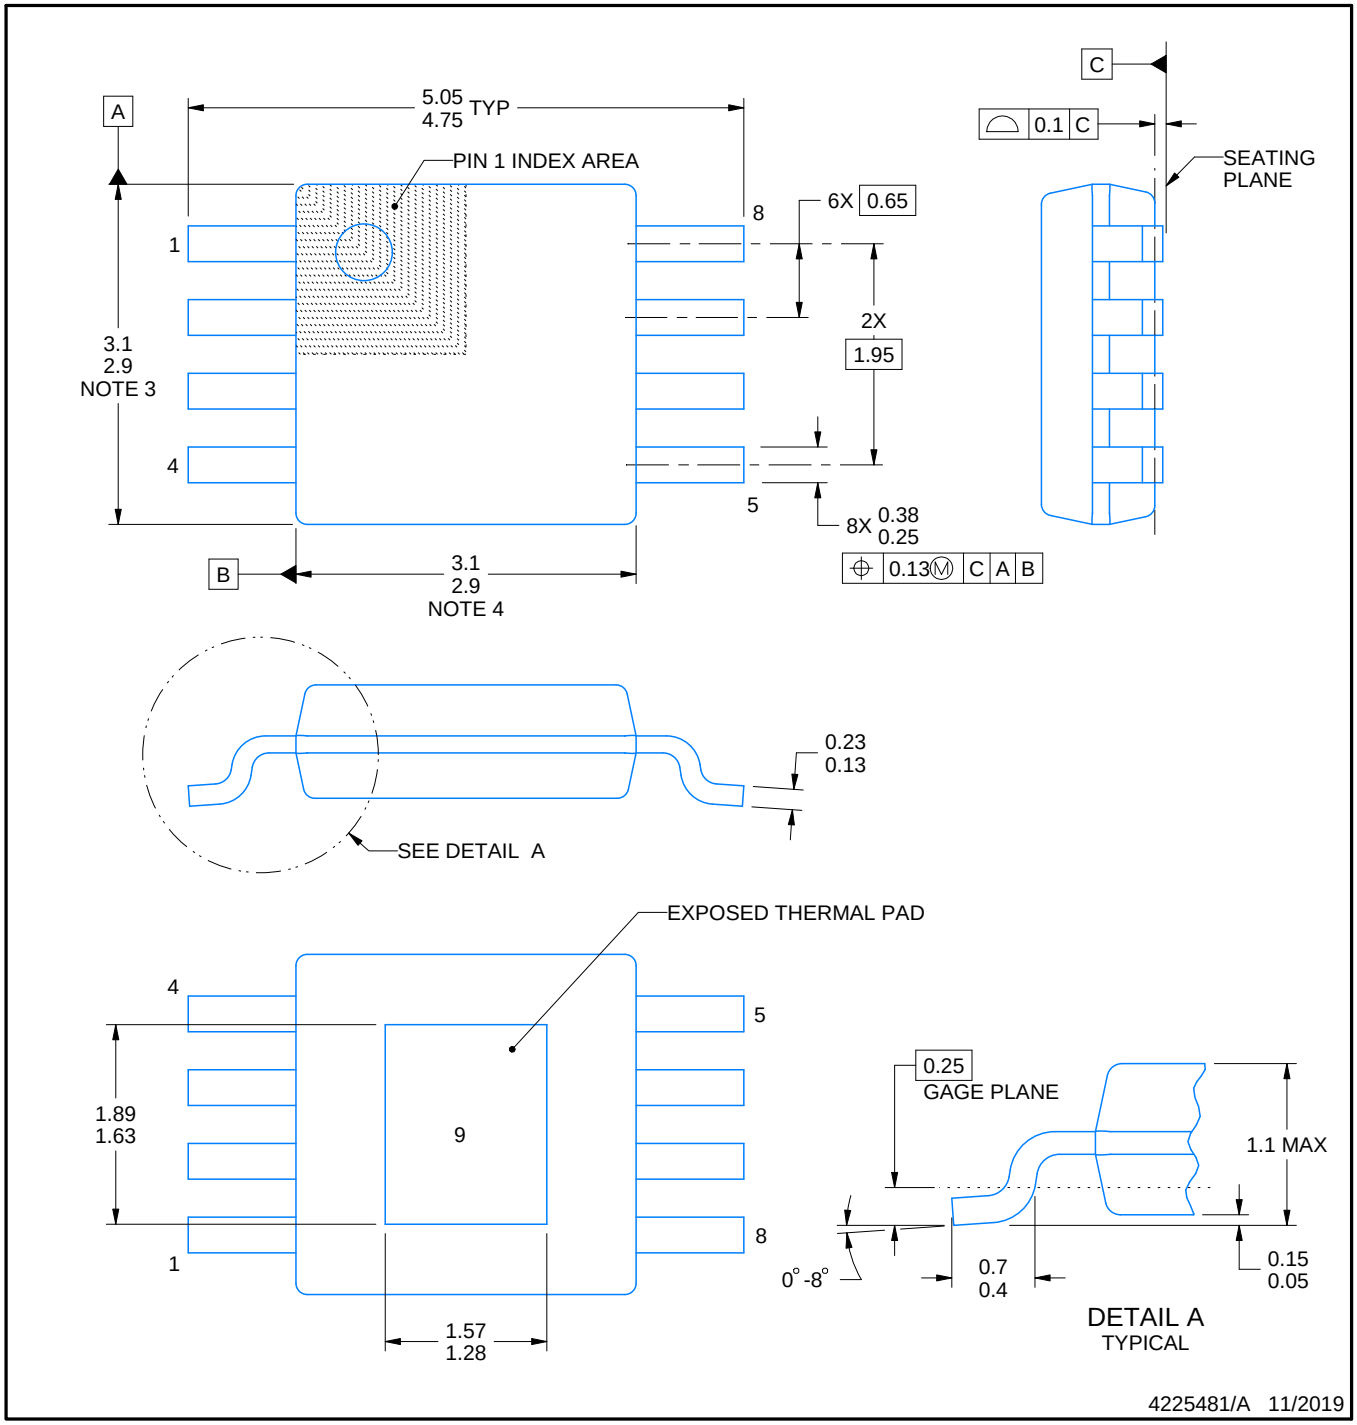


PowerPAD is a trademark of Texas Instruments.

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

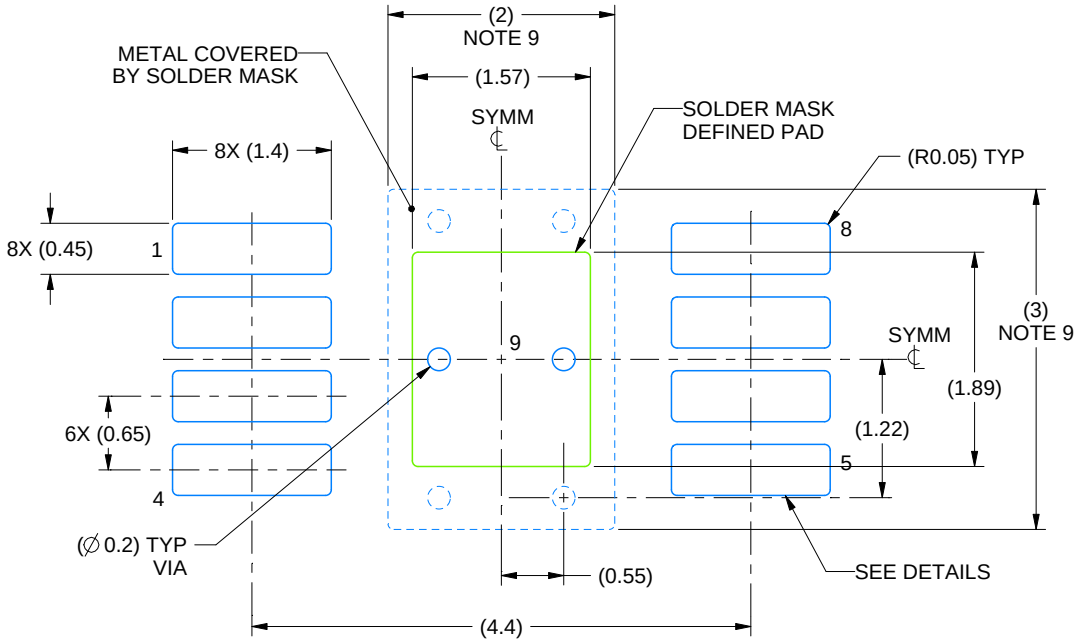

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 15X

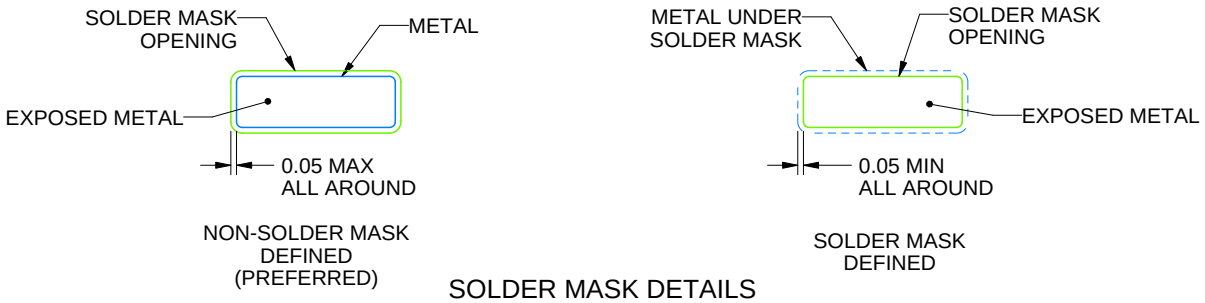


SOLDER MASK DETAILS

4225481/A 11/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

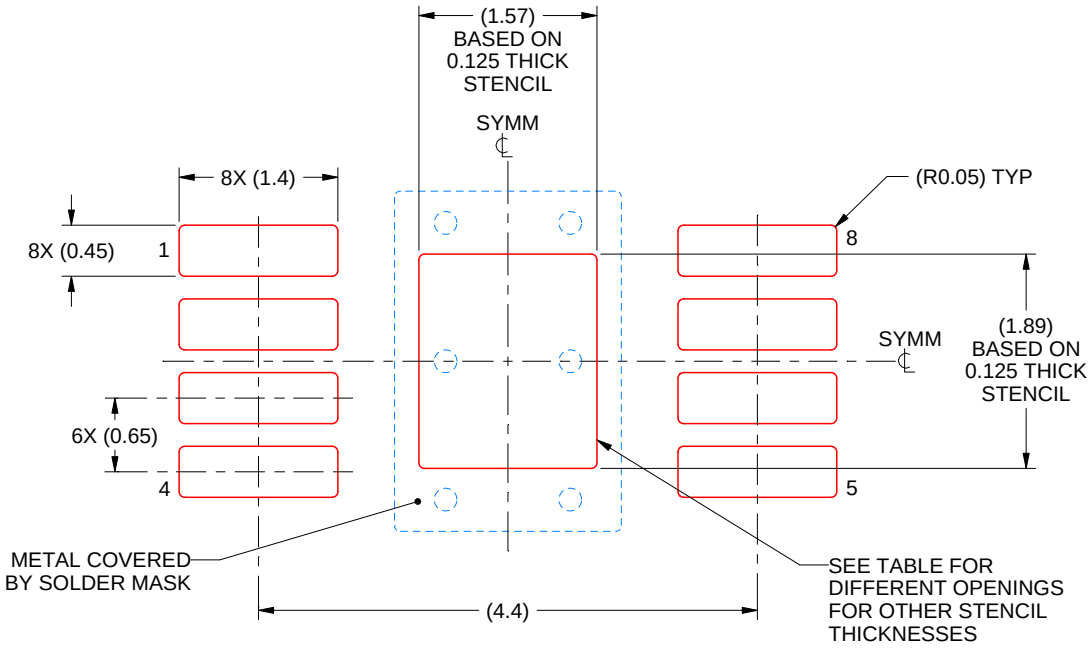


SOLDER PASTE EXAMPLE
EXPOSED PAD 9:
100% PRINTED SOLDER COVERAGE BY AREA
SCALE: 15X

STENCIL THICKNESS	SOLDER STENCIL OPENING
0.1	1.76 X 2.11
0.125	1.57 X 1.89 (SHOWN)
0.15	1.43 X 1.73
0.175	1.33 X 1.60

4225481/A 11/2019

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.




PACKAGE OUTLINE

D0008A


SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

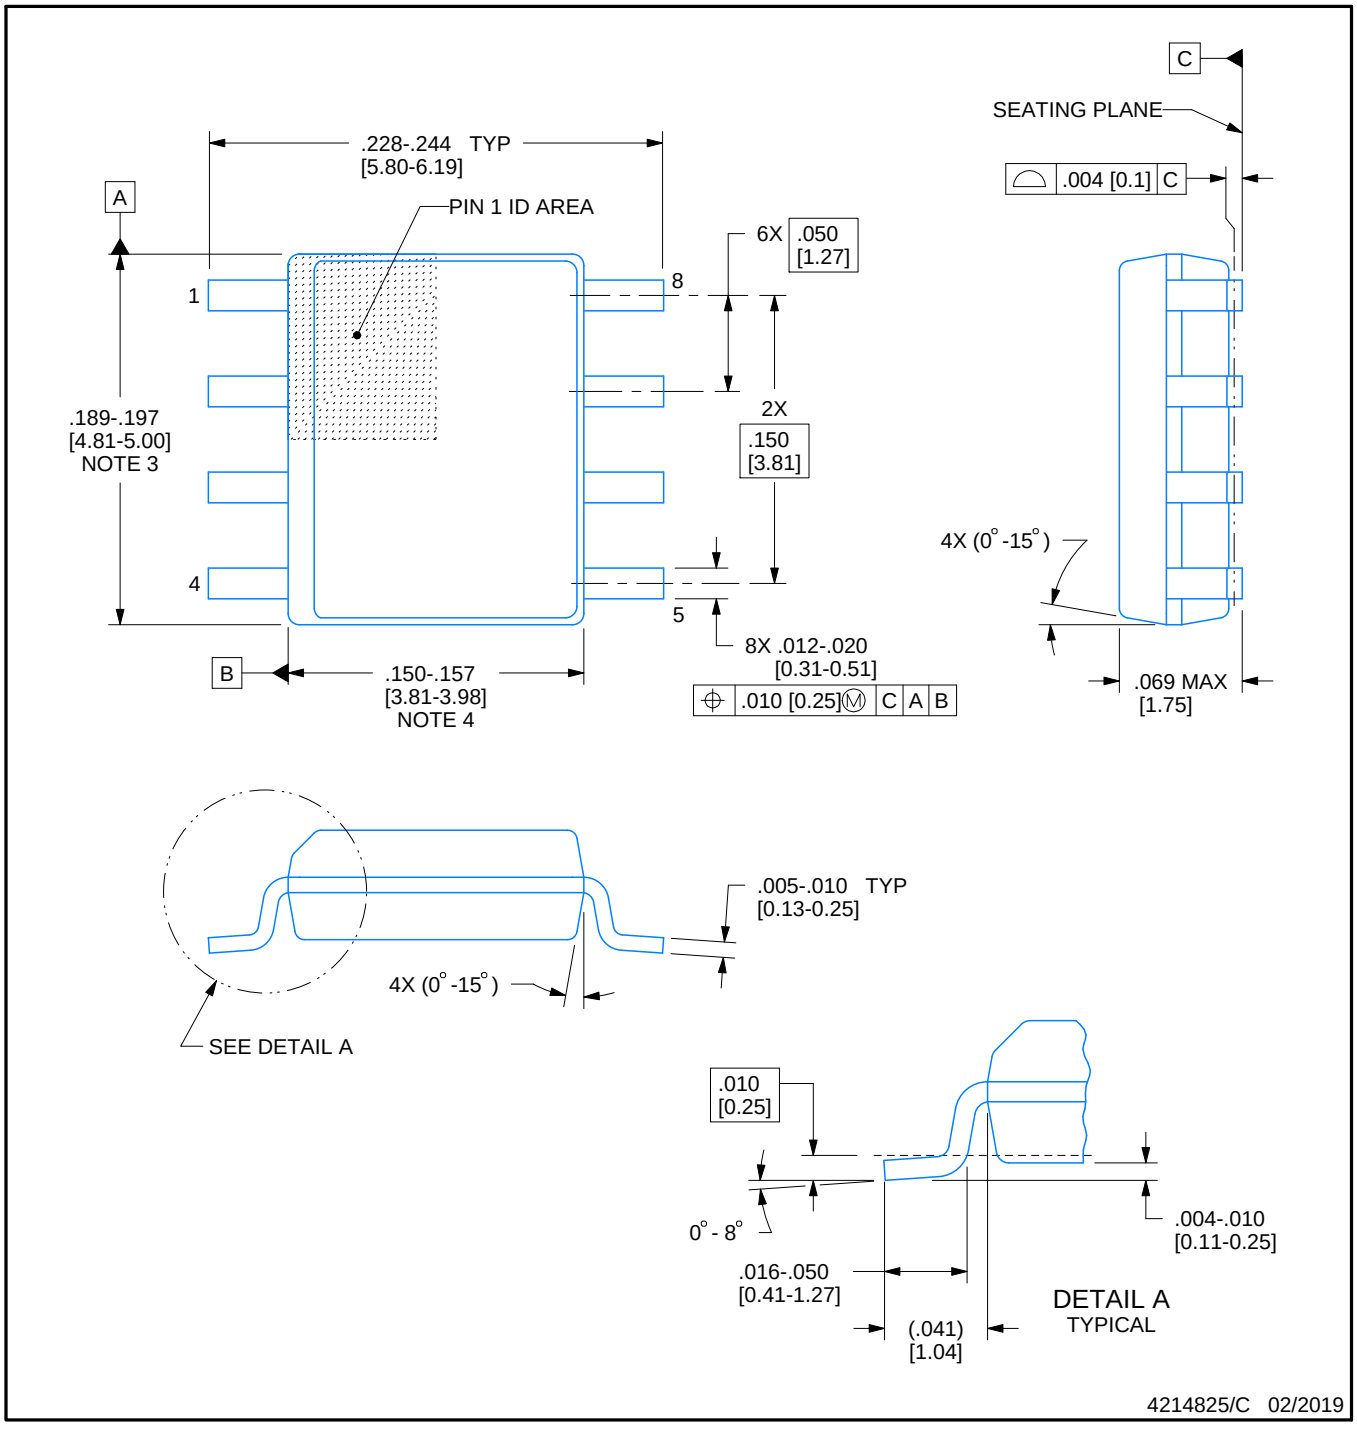


NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

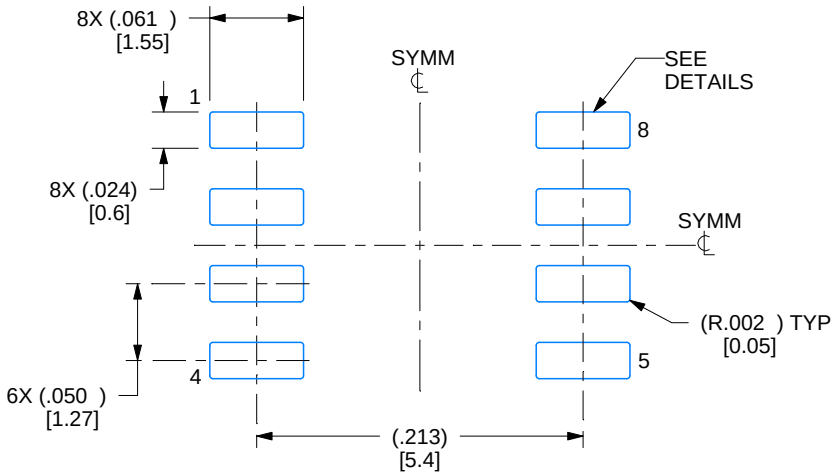

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

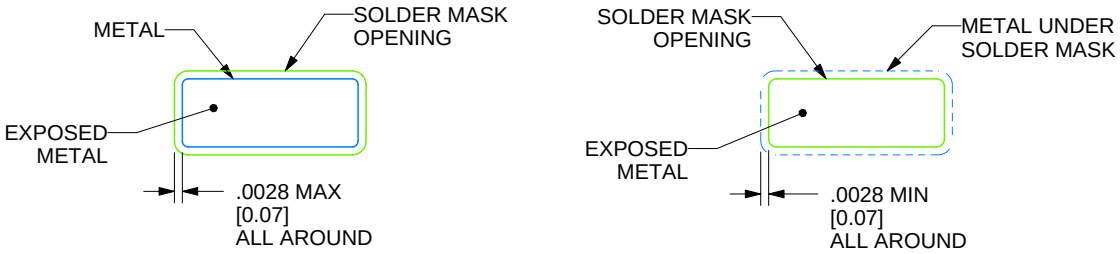

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

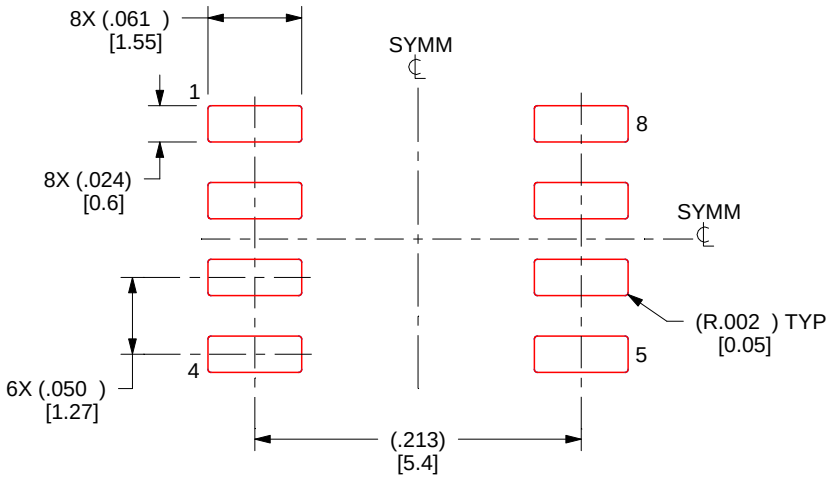

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025