


FEMALE M12 RIGHT ANGLE TO MALE M12 STRAIGHT CORDSET

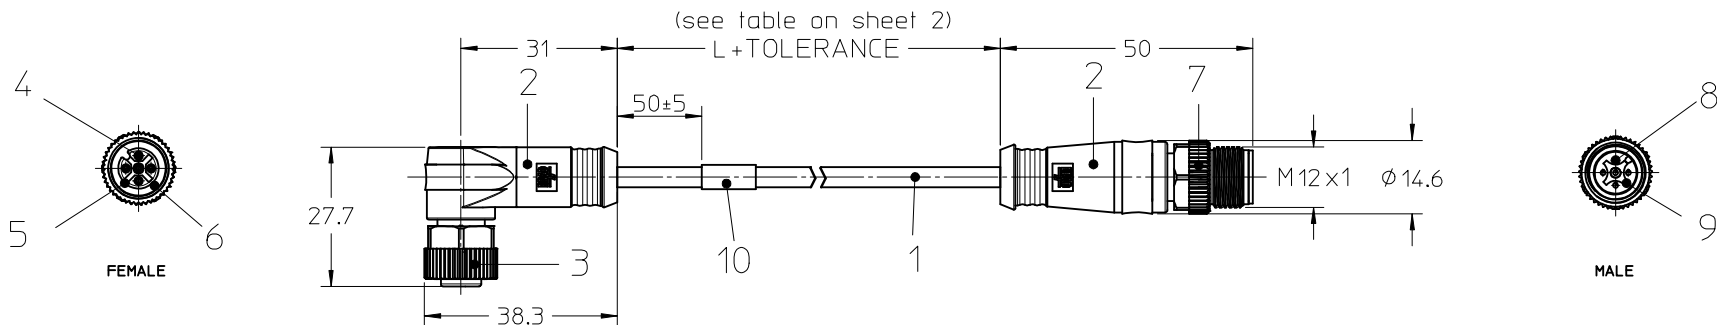

NOTES:

TEMPERATURE RANGE	SEE TABLE ON SHEET 2
CONTACT CURRENT RATING	3-5 POLES 4A 8 POLES 2A
VOLTAGE RATING	3-4 POLES 250V 5 POLES 60V 8 POLES 30V
PROTECTION CLASS	IP 67

TOLERANCES:	
≤ 1m	+40 mm
1m - 5m	+60 mm
5m - 10m	+80 mm
> 10m	+140 mm
> 20m	+160 mm
> 30m	+1%

Mating face view:

Shield connected to the housing

M12S 3 POLE	M12S 4 POLE	M12S 5 POLE	M12S 8 POLE
MALE	MALE	MALE	MALE
FEMALE	FEMALE	FEMALE	FEMALE
PIN # WIRE	PIN # WIRE	PIN # WIRE	PIN # WIRE
1 BROWN	1 BROWN	1 BROWN	1 WHITE
2 -	2 WHITE	2 WHITE	2 BROWN
3 BLUE	3 BLUE	3 BLUE	3 GREEN
4 BLACK	4 BLACK	4 BLACK	4 YELLOW
5 -	5 -	5 GREY	5 GREY
6 -	6 -	6 -	6 PINK
7 -	7 -	7 -	7 BLUE
8 -	8 -	8 -	8 RED

CODING REQUIRED TO
IEC 61076-2-101

Bill of Materials


ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
10	1	LABEL	-	-
9	1	INSERT XP MALE M12 SHIELD	PUR	BLACK
8	X	PIN MALE	BRASS	GOLD OVER NICKEL
7	1	KNU/HEX NUT M12 MALE	BRASS	CuNi3B
6	1	O-RING	FPM	RED
5	1	INSERT XP FEMALE M12 SHIELD	PUR	BLACK
4	X	CONTACT FEMALE	BRASS	GOLD OVER NICKEL
3	1	KNU/HEX NUT M12 FEMALE	BRASS	CuNi3B
2	-	OVERMOULD	TPU	BLACK
1	-	CABLE	SEE TABLE (SHEET 2)	-

ORIGINAL RELEASE EC NO: IPG2015-0505 DRWN:WSTRASZKIEWI 2014/12/08 CHKD:JMARSZALEK 2014/12/08 APPR:MIWASIECZKO 2014/12/11	QUALITY SYMBOLS ▽=0 ◻=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
A	REV		mm INCH		DRAWN BY DATE		TITLE CSE M12 M12 XP AC FE RA TPU MA STR XM molex		
			4 PLACES ± --- ± ---	WSTRASZKIEWI 2014/12/08	CHECKED BY DATE				
			3 PLACES ± --- ± ---	JMARSZALEK 2014/12/08	APPROVED BY DATE				
			2 PLACES ± --- ± ---	MIWASIECZKO 2014/12/11	MATERIAL NO.				
			1 PLACE ± --- ± ---	SEE TABLE	DOCUMENT NO.				
0 PLACE ± --- ± ---		ANGULAR ± 1 °		SD-120069-029		SHEET NO.			
DRAFT WHERE APPLICABLE		MUST REMAIN		1 OF 2					
WITHIN DIMENSIONS									

PART LIST

MOLEX PN	ENGINEERING No.	CABLE LENGTH "L" IN M
1200698684	883S31BS1M010	1M
1200698685	883S31BS1M020	2M
1200698686	883S31BS1M030	3M
1200698687	883S31BS1M050	5M
1200698688	883S31BS1M100	10M
1200698689	884S31BS1M010	1M
1200698690	884S31BS1M020	2M
1200698691	884S31BS1M030	3M
1200698692	884S31BS1M050	5M
1200698693	884S31BS1M100	10M
1200698694	885S31BS1M010	1M
1200698695	885S31BS1M020	2M
1200698696	885S31BS1M030	3M
1200698697	885S31BS1M050	5M
1200698698	885S31BS1M100	10M
1200698699	888S31BS2M010	1M
1200698700	888S31BS2M020	2M
1200698701	888S31BS2M030	3M
1200698702	888S31BS2M050	5M
1200698703	888S31BS2M100	10M

NUMERICAL CODE

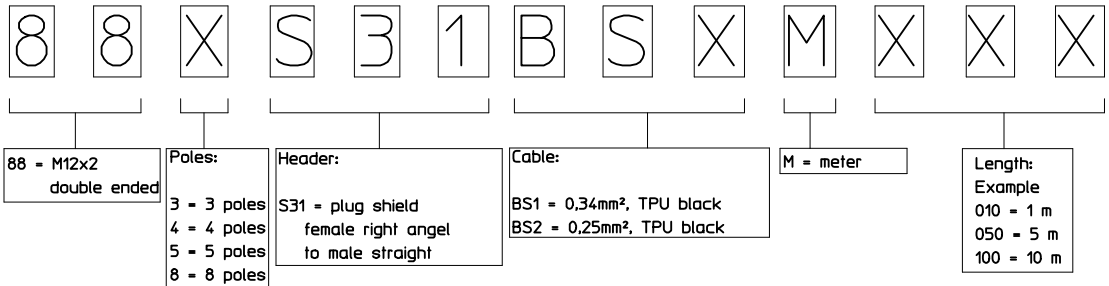

CABLE SPECIFICATION

CABLE TYPE	WIRE GAUGE	CABLE JACKET	UL	CSA	static	flexing	drag chain tested	shield	other
BS1 3P,4P,5P	0.34mm²	TPU black	STYLE 21215	yes	-40°C to +90°C 5xD	-25°C to +80°C 7.5xD	5 mio cycles	braid	WELD SLAG RESISTANCE
BS2 8P	0.25mm²	TPU black	STYLE 21215	yes	-40°C to +90°C 5xD	-25°C to +80°C 7.5xD	5 mio cycles	braid	WELD SLAG RESISTANCE

For Raw Cable Specification see SD-120209-003

ORIGINAL RELEASE
EC NO: IPG2015-0505
DRWN:WSTRASZKIEWI 2014/12/08
CHKD:JMARSZALEK 2014/12/08
APPR:MIWASIECZKO 2014/12/11

QUALITY SYMBOLS
▽=0
◻=0

DESCRIPTION
REV
A

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± ---
1 PLACE ± --- ± ---
0 PLACE ± --- ± ---
ANGULAR ± 1 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY
DRAWN BY DATE
WSTRASZKIEWI 2014/12/08
CHECKED BY DATE
JMARSZALEK 2014/12/08
APPROVED BY DATE
MIWASIECZKO 2014/12/11
MATERIAL NO.
SEE TABLE

SCALE

DESIGN UNITS
METRIC
THIRD ANGLE PROJECTION

CSE M12 M12 XP AC
FE RA TPU MA STR XM

molex

DOCUMENT NO.
SD-120069-029
SHEET NO.
2 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Id_frame_A3_P_ME_T
Rev E1 2012/01/25

9 8 7 6 5 4 3 2 1