T30UX Series with Analog Output

Important Information

For complete technical information about this product, including installation instructions, application requirements and guidelines, technical specifications, and accessories, go to www.bannerengineering.com and search for the instruction manual, p/n 257921.

Models

Models	Range	Frequency	Cable	Analog Output	Response Time
T30UXUA	100 mm to 1 m (3.9 in to 39 in)	224 kHz	2 m (6.5 ft) cable	0 to 10 V DC	45 ms or 105 ms selectable
T30UXUAQPMA			150 mm (6 in) PUR pigtail cable with 4-pin threaded M12 QD		
T30UXIA			2 m (6.5 ft) cable	4 to 20 mA	
T30UXIAQPMA			150 mm (6 in) PUR pigtail cable with 4-pin threaded M12 QD		
T30UXIA W/30			9 m (30 ft) cable		
T30UXUB	200 mm to 2 m (7.8 in to 78 in)	174 kHz	2 m (6.5 ft) cable	0 to 10 V DC	92 ms or 222 ms selectable
T30UXIB			2 m (6.5 ft) cable	4 to 20 mA	
T30UXUC	300 mm to 3 m (11.8 in to 118 in)	114 kHz	2 m (6.5 ft) cable	0 to 10 V DC	135 ms or 318 ms selectable
T30UXIC			2 m (6.5 ft) cable	4 to 20 mA	
T30UXICQPMA			150 mm (6 in) PUR pigtail cable with 4-pin threaded M12 QD		
T30UXIC W/30			9 m (30 ft) cable		

A model with a QD connector requires a mating cable.

Specifications

Sensing Range

"A" suffix models: 100 mm to 1 m (3.9 in to 39 in)
"B" suffix models: 200 mm to 2 m (7.8 in to 78 in)
"C" suffix models: 300 mm to 3 m (11.8 in to 118 in)

Ultrasonic Frequency

"A" suffix models: 224 kHz
"B" suffix models: 174 kHz
"C" suffix models: 114 kHz

Supply Voltage

10 V DC to 30 V DC (10% maximum ripple) at 40 mA, exclusive of load

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Output Configuration

Analog Output: 0 V DC to 10 V DC or 4 mA to 20 mA, depending on model

Output Rating

Analog Voltage Output: 2.5 kΩ min. load resistance; Minimum supply for a full 10 V output is 12 V DC (for supply voltages between 10 and 12, V out max. is at least V supply -2)
Analog Current Output: 1 kΩ max. at 24 V input; max. load resistance = (Vcc-4)/0.02Ω
For current output (4-20 mA) models, ideal results are achieved when the total load resistance
R = [(Vin – 4)/0.020]Ω. Example, at Vin = 24 V DC, R ≈ 1 kΩ (1 watt)

Minimum Window Size

10 mm (0.4 in)

Adjustments

Sensing window limits: TEACH-Mode of near and far window limits may be set using the push button or remotely via TEACH input.
Response speed selection: Fast or Slow (see or)
Advanced configuration options: Analog output slope, push button enabled/disabled, temperature compensation enabled/disabled (see)

Loss of Signal Indication

0 to 10V DC models: Analog output goes to 0 V
4 to 20 mA models: Analog output goes to 3.6 mA

Environmental Rating

Leakproof design, ratedIP67

Connections

2 m (6.5 ft) or 9 m (30 ft) shielded 4-conductor (with drain) PVC cable, 150 mm (6 in) PUR cable with an M12 connector (QPMA), or 4-pin integral M12 connector (Q8)

Output Response Time

"A" suffix models: 45 ms (fast); 105 ms (slow)
"B" suffix models: 92 ms (fast); 222 ms (slow)
"C" suffix models: 135 ms (fast); 318 ms (slow)

Output Protection Circuitry

Protected against short circuit conditions

Linearity

0.25% of distance

Resolution

"A" suffix models: 0.1% of distance (0.5 mm min.)
"B" suffix models: 0.1% of distance (1.0 mm min.)
"C" suffix models: 0.1% of distance (1.5 mm min.)

Application Note

The temperature warmup drift upon power-up is less than 1% of the sensing distance.

Temperature Effect

0.02% of distance/°C

Delay at Power-up

500 ms

Operating Conditions

–40 °C to +70 °C (–40 °F to +158 °F)
95% at +50 °C maximum relative humidity (non-condensing)

Required Overcurrent Protection

WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.
Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.
Supply wiring leads < 24 AWG shall not be spliced.
For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	2.0	30	0.5

Certifications

Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM


Turck Banner LTD Blenheim House
Blenheim Court
Wickford, Essex SS11 8YT
GREAT BRITAIN

© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com


141958
p/n: 141958 Rev. F

Dimensions


All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

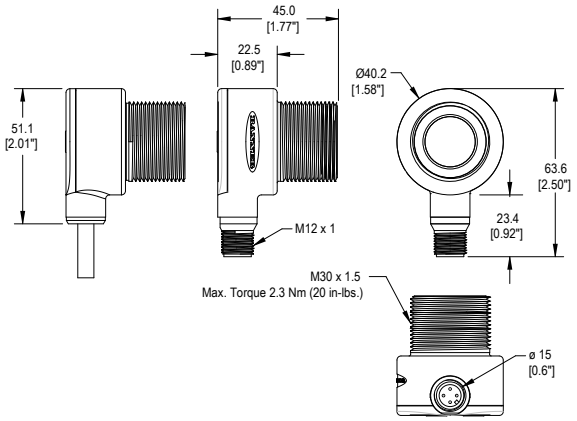

Wiring

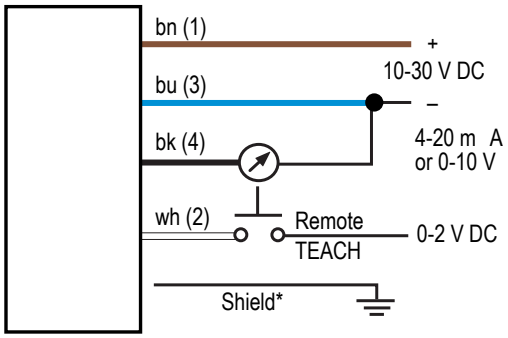

4-pin M12 male quick disconnect connector



Wiring Key
1 = Brown
2 = White
3 = Blue
4 = Black

Cable and QD hookups are functionally identical. It is recommended that the shield wire be connected to earth ground. Shielded cordsets are recommended for all QD models.

Sensor Configuration

For detailed configuration instructions, see the T30UX with Analog Output Product Manual.

Two TEACH methods may be used to configure the sensor:

- Teach individual minimum and maximum limits, or
- Use Auto-Window feature to center a sensing window around the taught position.

The sensor may be configured either via its push button, or via a remote switch. Remote configuration also may be used to disable the push button, preventing unauthorized personnel from adjusting the configuration settings. To access this feature, connect the white wire of the sensor to 0 V DC, with a remote configuration switch between the sensor and the voltage.

Configuration is accomplished by following the sequence of input pulses. The duration of each pulse (corresponding to a push button “click”), and the period between multiple pulses, are as “T”: **0.04 seconds < T < 0.8 seconds**

Remote line configuration requires a greater than 1 second pause between pulse sequences.

Contact Us

Banner Engineering Corp. | 9714 Tenth Avenue North | Plymouth, MN 55441, USA | Phone: + 1 888 373 6767

For worldwide locations and local representatives, visit www.bannerengineering.com.

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

© Banner Engineering Corp. All rights reserved. www.bannerengineering.com