Generated by Foxit PDF Creator © Foxit Software
http://www.foxitsoftware.com For evaluation only.

Multi coin acceptor output format:

At present our coin of output signal format has two kinds: PULSE and BYTE.


The output signal formats also may according to the customer need flexible modification.

1. PULSE


A. For a or several output signal pulses（In setting and decide，For instance you configure cast 1 yuan output 1 PULSE，Can also set the output 5 made five yuan PULSE），

B. PULSE Width can be divided into three kinds：25ms、45ms、65ms（by Fast、Medium、SlowSwitch to choose）。

C. When the switch in N.O. ， Output for low effective PULSE

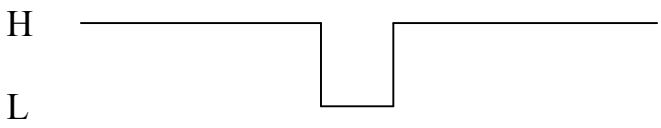

When the switch in N.C., output for high effective PULSE

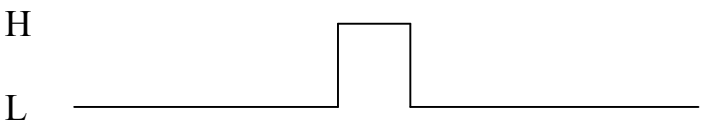

2. BYTE

A. The output signal in setting and decide (such as set shots for $1 output hexadecimal 01H, also can be set to throw 10 yuan output hexadecimal 0AH).

B. Using 2400Baud asynchronous transfer communications. (also 9600Baud) by 4,800 or

Generated by Foxit PDF Creator © Foxit Software
http://www.foxitsoftware.com For evaluation only.

A bit start bit, eight bit data bits, a bit accidentally parity, a bit stop bits

