


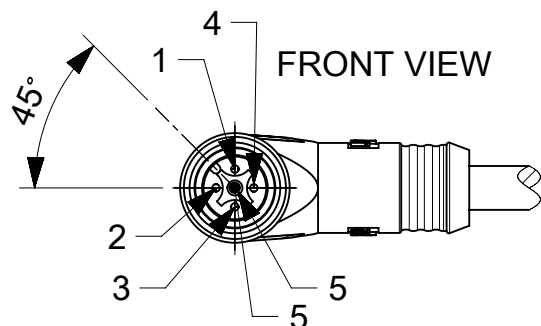


FRONT VIEW



STANDARD
SCREW & GASKET
Index of protection: IP65



BILL OF MATERIALS

14	0/2	I/D CARRIER
13	0/1	LABEL PLASTIC
12	0/1	WASHER
11	0/1	PCB
10	1	GASKET
9	1	SCREW
8	4	CONTACT DIN
7	1	INSERT DIN A
6	-	MOULDING MATERIAL BLACK PP
5	5	CONTACT MALE
4	1	M12 COUPLING NUT MALE
3	1	M12 INSERT 5P MALE
2	-	MOULDING MATERIAL BLACK TPU
1	-	CABLE
ITEM	QTY.	DESCRIPTION

DOCUMENT STATUS	P1	RELEASE DATE	2025/10/28	09:23:47
-----------------	----	--------------	------------	----------

L + Tolerance (see Table on sheet 3)

50 REF



Label

L + Tolerance (see Table on sheet 3)



50 REF REF

Label

DIN Connector views
for PN without LED

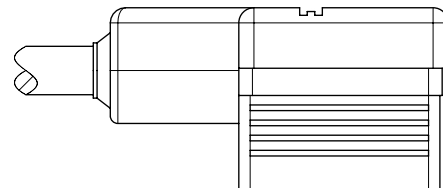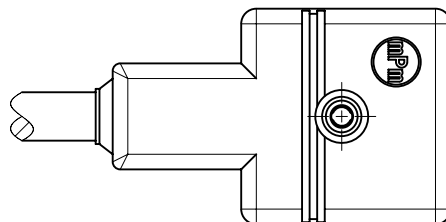

DIN Connector views
for PN with LED

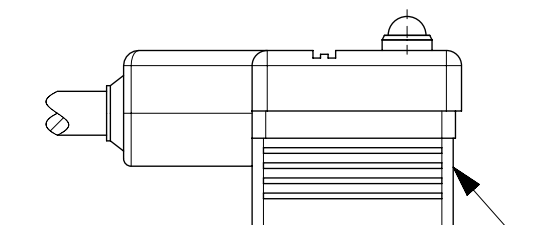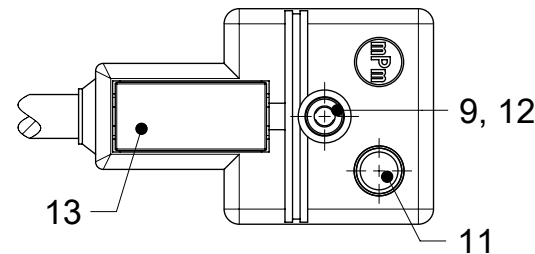


Electrical diagram printed in white

ELECTRICAL DIAGRAMS


M12

DIN S0

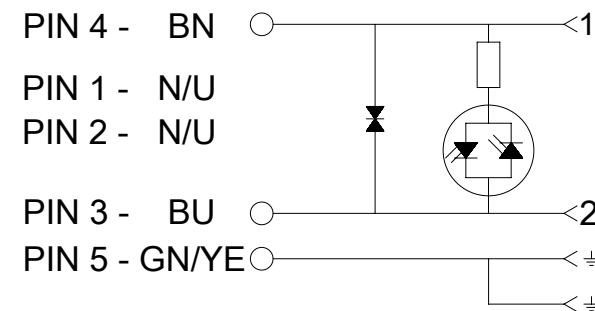


M12


DIN C4

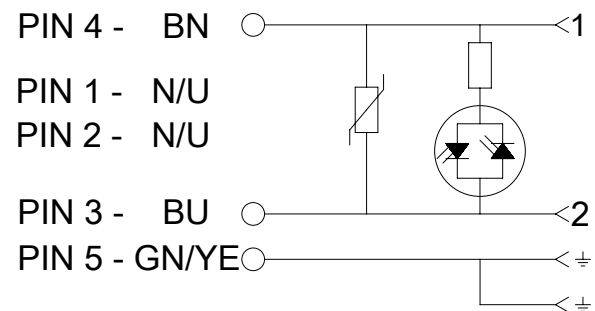

M12

DIN

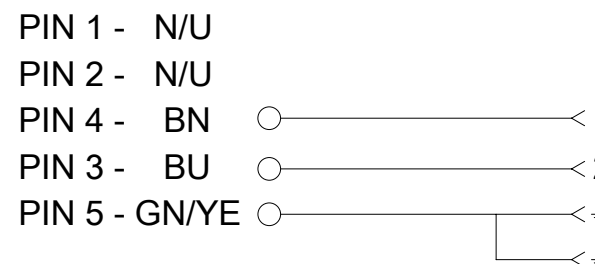

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515981				molex	
mm		1:1							
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 837786 DRWN: RAGHAH32025/10/21 CHK'D: GGA2025/10/28 APPR: GGA2025/10/28					
ANGULAR TOL ± 1.0 °									
4 PLACES		±		INITIAL REVISION: DRWN: APAWLAK012016/05/30 APPR: RSILLER2024/04/05					
3 PLACES		±							
2 PLACES		± 0.05		DOCUMENT NUMBER 1210350367 DOC TYPE PSD DOC PART 000 REVISION B2					
1 PLACE		± 0.3							
0 PLACES		± 0.5		MATERIAL NUMBER SEE SHEET 3 CUSTOMER GENERAL MARKET SHEET NUMBER 1 OF 3					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									
THIRD ANGLE PROJECTION 				DRAWING A3-SIZE		SERIES 121035			

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Others parts available upon request).

OPTIONS

E 8 5 0 X X X X X X X X X X

E=Form A
(18mm
contact
spacing)

8=MMC M12
Connector

5=5 Poles

0=Default Standard Wiring

Electrical configuration:
0 = Without circuit
A = S0 24V Yellow LED
B = C4 24V Yellow LED
C = S0 110V Yellow LED
D = C4 110V Yellow LED
E = S0 24V Green LED
F = C4 24V Green LED
G = S0 110V Green LED
H = C4 110V Green LED
J = S0 24V Red LED
K = C4 24V Red LED
L = S0 110V Red LED
M = C4 110V Red LED
S = C4 230V Yellow LED

DIN Earth Position - o'clock &
M12 connector body:
0 = Earth H6/H12, Male Straight
2 = Earth H6/H12, Male Right Angle

Cable type:
See Table

Units:
M=Meter











Length
Examples:
005=0.5 units
010=1 units
100=10 units

Overmold color:
Blank (Standard)=Black
A=Grey / G=Black / Y=Yellow

Coupling Nut:
Blank (Standard)=Knurled Brass Ni Plated
1=Hexagonal Stainless steel
5=Knurled Derlin
7=Knurled Brass Ni Plated, Teflon Coated
9=Knurled / Hexagonal Brass Ni Plated

H= 2 pcs. of I/D Carrier PVC Transparent
(Cables lxx & P82 always with
2 pcs. I/D Carrier)

R= NBR Integrated Gasket & Screw (IP67)



CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	SHIELD
A23	3	0.75mm ²	PVC BLACK	-	-	-20°C to +70°C, 3xO.D.	-15°C to +70°C, 5xO.D.	-
A58	3	20AWG	PVC BLACK	UL 2661	C22.2 II A 105°C/300V	-30°C to +105°C, 10xO.D.	-5°C to +105°C, 15xO.D.	-
B08	3	18AWG	PUR YELLOW	UL 20668	C22.2 II A 90°C/300V	-	-	-
B31	3	0.50mm ²	WSOR BLACK	UL 21215	-	-	-25°C to +80°C, 7.5xO.D.	-
E12	3	0.50mm ²	PVC BLACK	-	-	-20°C to +70°C, 3xO.D.	-15°C to +70°C, 5xO.D.	-
I12	3	0.50mm ²	CEI PVC GREY	-	-	-25°C to +70°C, 10xO.D.	-5°C to +70°C, 15xO.D.	-
P12	3	0.50mm ²	PUR BLACK	-	-	-40°C to +90°C, 7.5xO.D.	-15°C to +90°C, 12.5xO.D.	-
P82	3	0.34mm ²	PUR IRR ORANGE	-	-	-50°C to +105°C, 5xO.D.	-40°C to +105°C, 7.5xO.D.	-

Table of length tolerances [mm]		
Over	Up to and including	Tolerance
0	1000	±20
1000	3000	±30
3000	5000	±40
5000	10000	±50
10000	15000	±100
15000	20000	±150
20000		±L/100

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
DIMENSION UNITS		SCALE	CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515981							
mm		1:1								
GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 837786 DRWN: RAGHAH3 CHK'D: GGA APPR: GGA INITIAL REVISION: DRWN: APAWLAK01 APPR: RSILLER							
ANGULAR TOL ± 1.0 °										
4 PLACES	±									
3 PLACES	±									
2 PLACES	±	0.05								
1 PLACE	±	0.3	2025/10/21 2025/10/28 2024/04/05							
0 PLACES	±	0.5								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER	SHEET NUMBER
					A3-SIZE	121035	SEE SHEET 3		GENERAL MARKET	2 OF 3

molex				
E850 DIN A / MMC 5P MM				
PRODUCT CUSTOMER DRAWING				
DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
1210350367		PSD	000	B2

DOCUMENT STATUS	P1	RELEASE DATE	2025/10/28	09:23:47
-----------------	----	--------------	------------	----------

10	9	8	7	6	5	4	3	2	1
PART LIST									
Pos.	Part No.	Engineering No.	Cable Length						
1	1210350133	E85000P12M006	0.6m						
25	1210360178	E850A0P12M020	2m						
29	1210360192	E850B0P12M006	0.6m						
30	1210360193	E850B0P12M010	1m						
31	1210360194	E850B0P12M015	1.5m						
32	1210360195	E850B0P12M020	2m						
33	1210360196	E850B0P12M050	5m						
37	1210360209	E850B2P12M010	1m						
39	1210360211	E850B2P12M030	3m						
41	1210360356	E850B0P12M030	3m						
42	1210360399	E850B0P12M003	0.3m						
49	1210360491	E850A0A58M010	1m						
50	1210360492	E850A0A58M015	1.5m						
51	1210360493	E850A0A58M030	3m						
52	1210360494	E850A0A58M050	5m						
53	1210360495	E850A0A58M100	10m						
55	1210360497	E850B2P12M025G	2.5m						
60	1210360559	E850B0E12M050	5m						
62	1210360574	E850B0E12M020	2m						
70	1210360594	E850B0P12M100	10m						
71	1210360596	E850B2E12M006	0.6m						
74	1210360627	E850B0E12M010	1m						
84	1210360694	E850A0A58M006	0.6m						
86	1210360708	E850B0A23M030	3m						
88	1210360719	E850B2A23M017	1.7m						
89	1210360725	E850D0A23M030	3m						
92	1210360754	E850A0A58M005	0.5m						
101	1210360789	E850D0P12M020	2m						
107	1210360813	E850A0A58M007	0.7m						
109	1210360816	E850B0I12M020Y	2m						
110	1210360817	E850B0I12M030Y	3m						
112	1210360821	E850B2P12M015	1.5m						
134	1210360970	E850B0P12M010R	1m						
136	1210361900	E850B0A23M015	1.5m						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

mm

SCALE

1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 1.0 °

4 PLACES ±

3 PLACES ±

2 PLACES ± 0.05

1 PLACE ± 0.3

0 PLACES ± 0.5

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIRD ANGLE PROJECTION

DRAWING

A3-SIZE

SERIES

121035

MATERIAL NUMBER

SEE PART LIST

CUSTOMER

GENERAL MARKET

SHEET NUMBER

3 OF 3

CURRENT REV

DESC: REMOVED OBSOLETE

PART NUMBERS AS PER PCN#515981

EC NO: 837786

DRWN: RAGHAH3

CHK'D: GGA

APPR: GGA

2025/10/21

2025/10/28

2025/10/28

2025/10/28

INITIAL REVISION:

DRWN: APAWLAK01

APPR: RSILLER

2016/05/30

2024/04/05

DOCUMENT NUMBER

1210350367

DOC TYPE

PSD

DOC PART

000

REV

E

PRODUCT CUSTOMER DRAWING

1210350367

PSD

000

E

DOCUMENT STATUS

P1

RELEASE DATE

2025/10/28 09:23:47

| 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |

A diagram of a circular component, likely a wafer, divided into five numbered regions (1, 2, 3, 4, 5) by a central cross-shaped structure. Region 5 is the central circular area, and regions 1, 2, 3, and 4 are the four quadrants. A label 'LEADING PIN' with an arrow points to region 5.



PIN	WIRE COLOR
1	TERMINAL
2	TERMINAL
3	BLUE
4	BROWN
5	GREEN/YELLOW BLACK

OPTIONS

H= 2 pcs. of I/D Carrier PVC Transparent
(Cables lxx always with
2 pcs. I/D Carrier)_____


SCALE 1:2

Operating Temperature: -25°C +85°C

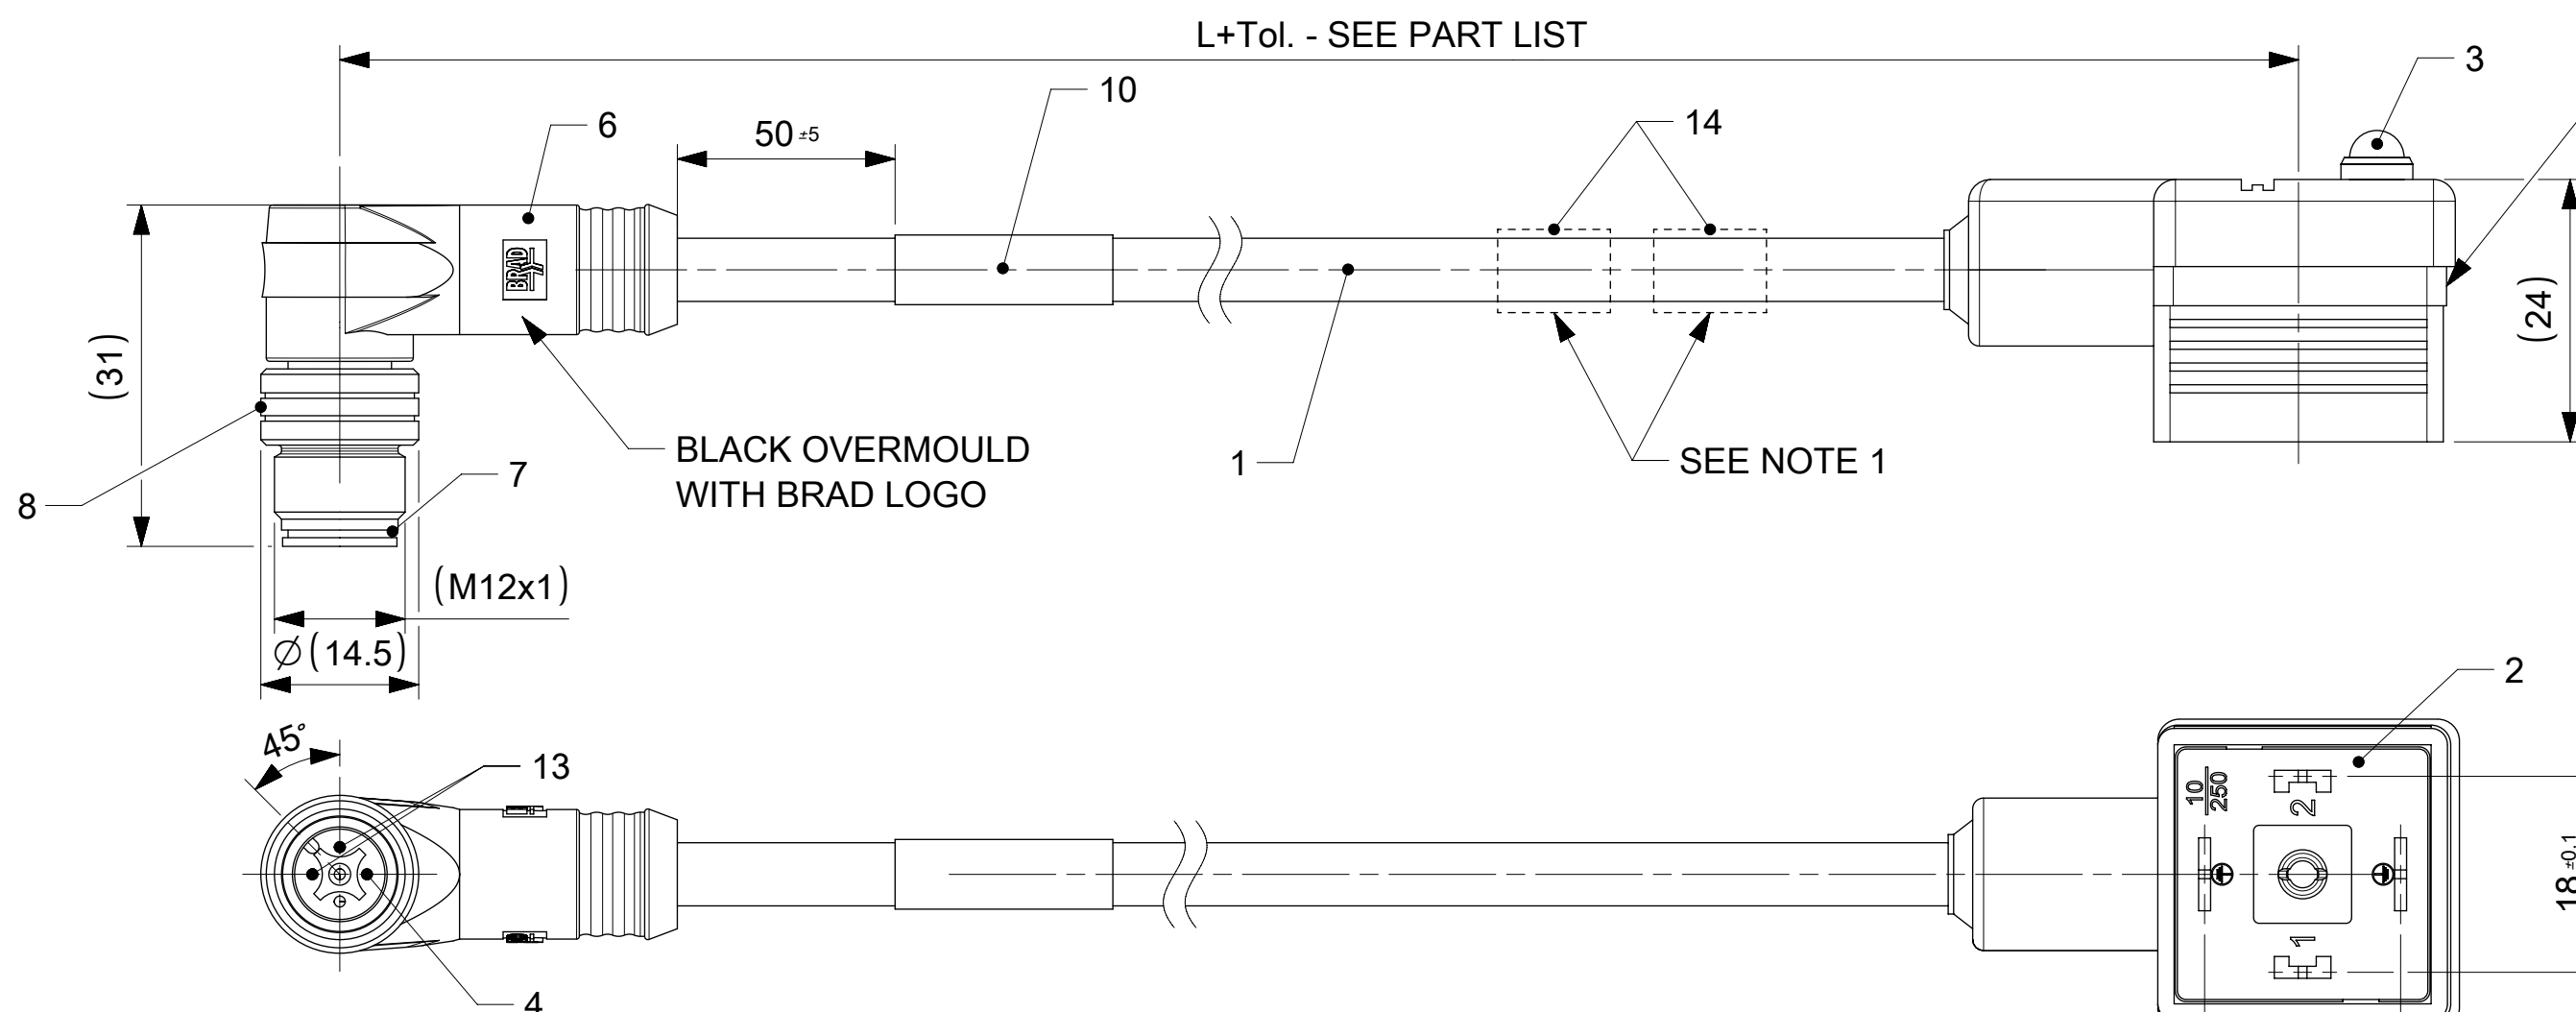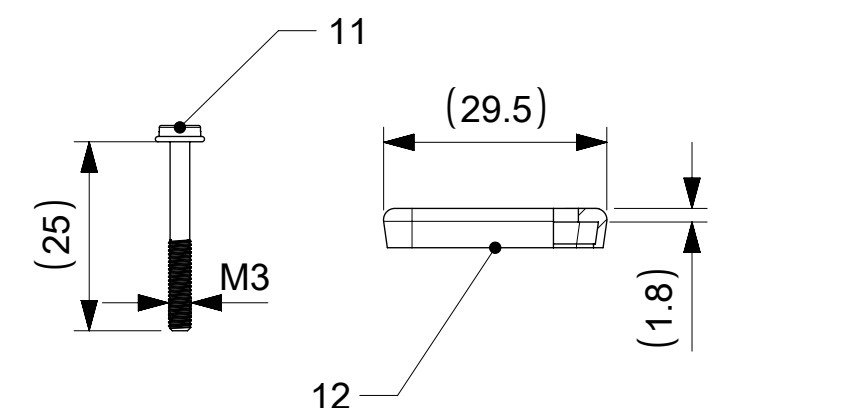


— SEE NOTE 1

CUSTOMER PRODUCT APPROVAL
APPROVED BY: _____
DATE: _____
MUST BE SIGNED AND RETURNED BEFORE PRODUCTION WILL BEGIN

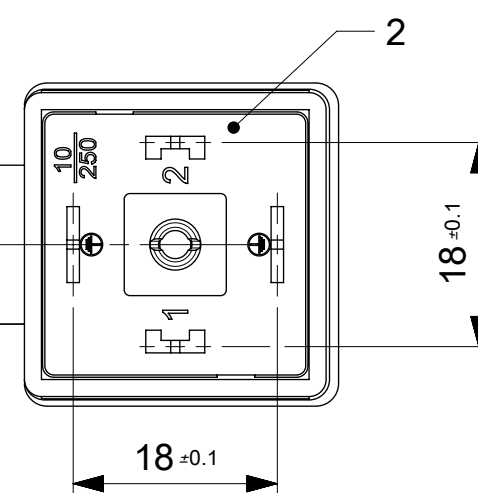

ELECTRICAL DIAGRAM : C4

DIN

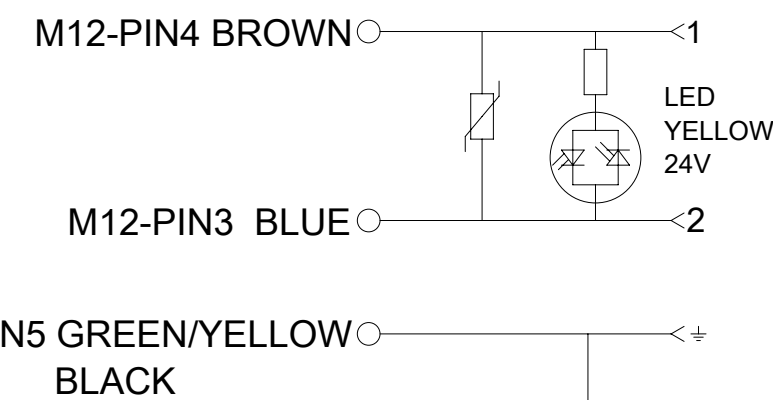

1. USE 2xI/D CARRIER IF H ON THE END OF PART No MATRIX OR GREY CABLE Ixx

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE	CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#517292				molex					
mm		1:1										
GENERAL TOLERANCES (UNLESS SPECIFIED)							EC NO: 838027			DIN/MMN 5P 24V MM 90 XM XXX		
ANGULAR TOL ± 1.0 °												
4 PLACES		±	DRWN: RAGHAH3		2025/09/18	PRODUCT CUSTOMER DRAWING						
3 PLACES		±	CHK'D: GGA		2025/10/30							
2 PLACES		± 0.05	APPR: GGA		2025/10/30	DOCUMENT NUMBER 1210360210						
1 PLACE		± 0.3	INITIAL REVISION:							DOC TYPE	DOC PART	REVISION
0 PLACES		± 0.5	DRWN: SSM		2018/07/25					PSD	000	A5
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER	SHEET NUMBER		
			A2-SIZE		121036	SEE SHEET 2		GENERAL MARKET		1 OF 2		

Table of length tolerances [mm]		
Over	Up to and including	Tolerance
0	1000	±20
1000	3000	±30
3000	5000	±40
5000	10000	±50
10000	15000	±100
15000	20000	±150
20000		±L/100

BOM

ITEM No.	QTY.	DESCRIPTION	MATERIAL	FINISH/COLOR
1	-	CABLE	SEE CABLE LIST	SEE CABLE LIST
2	1	MOUNTED INSERT ASSEMBLY	-	BLACK
3	1	PCB WITH COMPONENT	-	-
4	3	CONTACT MALE	BRASS	SELECTIVE GOLD OVER NICKEL
5	-	DIN MOULD COMPOUND	PP	BLACK
6	1	OVERMOULD	SEE MATRIX	SEE MATRIX
7	1	MALE INSERT	PUR	BLACK
8	1	M12 MALE COUPLING NUT	BRASS	Ni-PLATED
9	1	LABEL;PLASTIC	PLASTIC	WHITE
10	1	LABEL WRAP	VINYL	YELLOW
11	1	SCREW	-	-
12	1	GASKET	NBR	BLACK
13	1	PVC LINE TER	PVC	-
14	0/2	2x ID CARRIER	-	-

FORMAT: master-ib-prod-A
REVISION: J1
DATE: 00000000

[illegible]

PART LIST






MOLEX P/N	ENGINEERING No.	LENGTH(mm)
1210360711	E850B2A23M005	500
1210360713	E850B2A23M007	700
1210360719	E850B2A23M017	1700
1210360596	E850B2E12M006	600
1210360209	E850B2P12M010	1000
1210360821	E850B2P12M015	1500
1210360497	E850B2P12M025G	2500
1210360211	E850B2P12M030	3000

CABLE SPECIFICATION :

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	SHIELD
A23	3	0.75mm ²	PVC BLACK	-	-	-20°C to +70°C, 3xO.D.	-15°C to +70°C, 5xO.D.	-
B31	3	0.50mm ²	WSOR BLACK	UL 21215	-	-	-25°C to +80°C, 7.5xO.D.	-
E12	3	0.50mm ²	PVC BLACK	-	-	-20°C to +70°C, 3xO.D.	-15°C to +70°C, 5xO.D.	-
I12	3	0.50mm ²	CEI PVC GREY	-	-	-25°C to +70°C, 10xO.D.	-5°C to +70°C, 15xO.D.	-
P12	3	0.50mm ²	PUR BLACK	-	-	-40°C to +90°C, 7.5xO.D.	-15°C to +90°C, 12.5xO.D.	-

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																					
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#517292		molex															
mm		1:1																			
GENERAL TOLERANCES (UNLESS SPECIFIED)																					
ANGULAR TOL		± 1.0 °				DIN/MMN 5P 24V MM 90 XM XXX															
4 PLACES		±				EC NO: 838027		PRODUCT CUSTOMER DRAWING													
3 PLACES		±		DRWN: RAGHAH3 2025/09/18																	
2 PLACES		± 0.05		CHK'D: GGA 2025/10/30																	
1 PLACE		± 0.3		APPR: GGA 2025/10/30		DOCUMENT NUMBER 1210360210															
0 PLACES		± 0.5		INITIAL REVISION:						DOC TYPE		DOC PART		REVISION							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING A2-SIZE						SERIES 121036		MATERIAL NUMBER SEE SHEET 2		CUSTOMER GENERAL MARKET		SHEET NUMBER 2 OF 2					
						DRWN: SSM 2018/07/25		PSD										000		A5	
						APPR: SSILLER 2018/07/26															

Table of lenght tolerances [mm]		
Over	Up to and including	Tolerance
0	1000	±20
1000	3000	±30
3000	5000	±40
5000	10000	±50
10000	15000	±100
15000	20000	±150
20000		±L/100

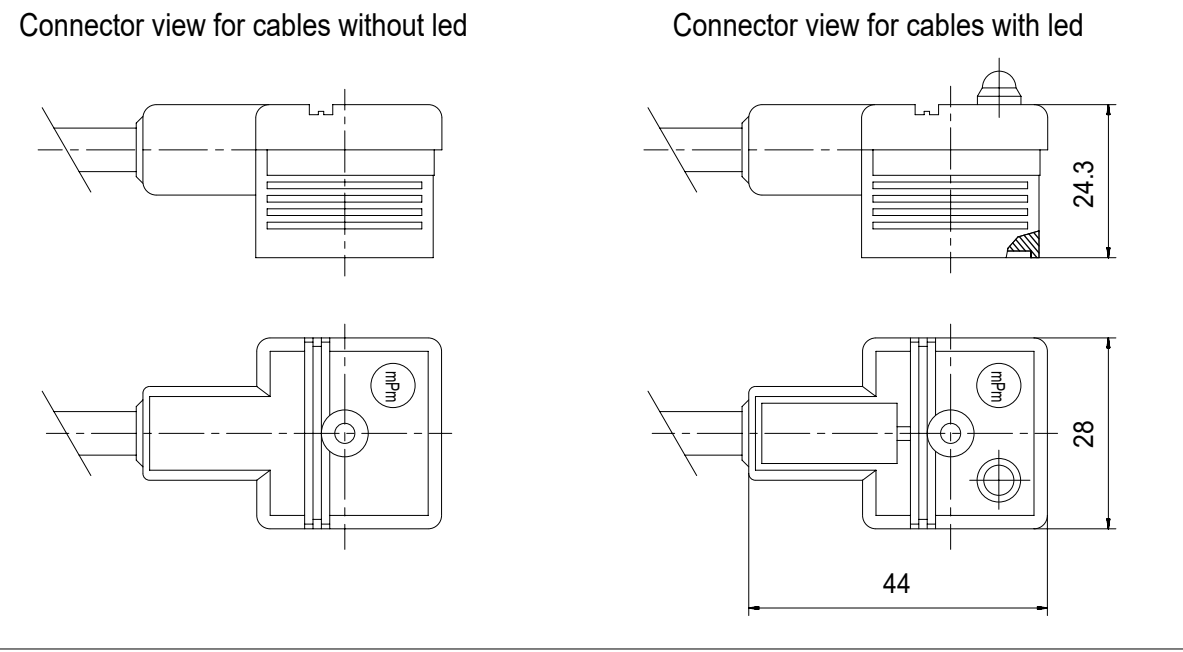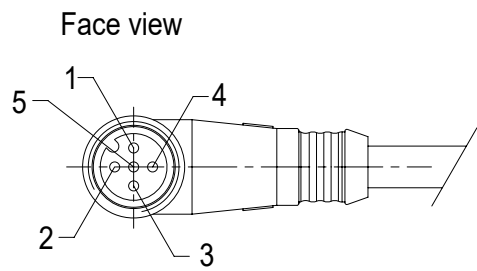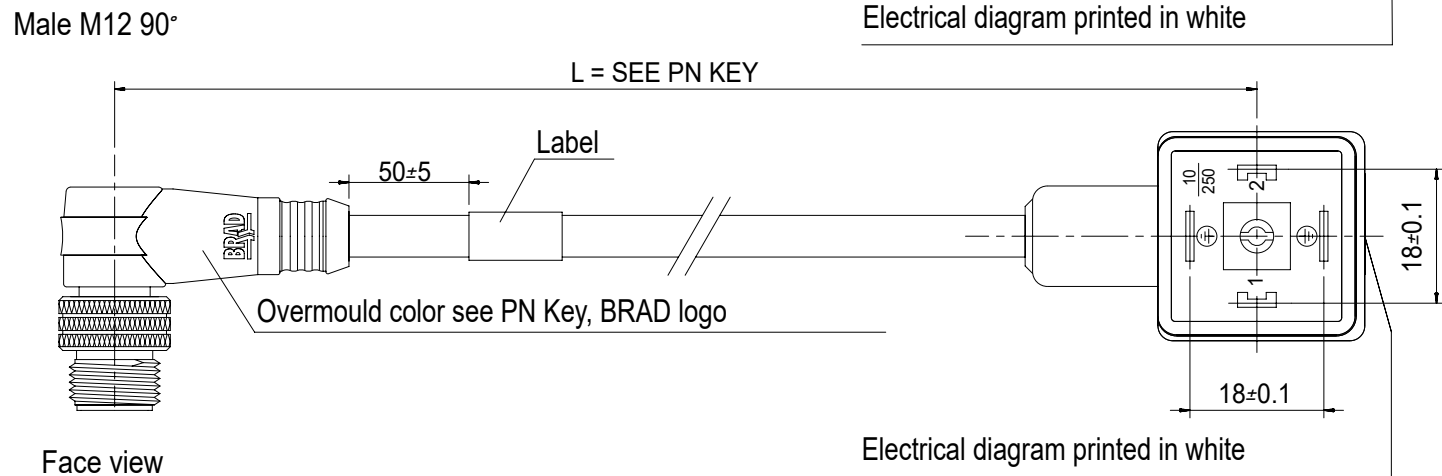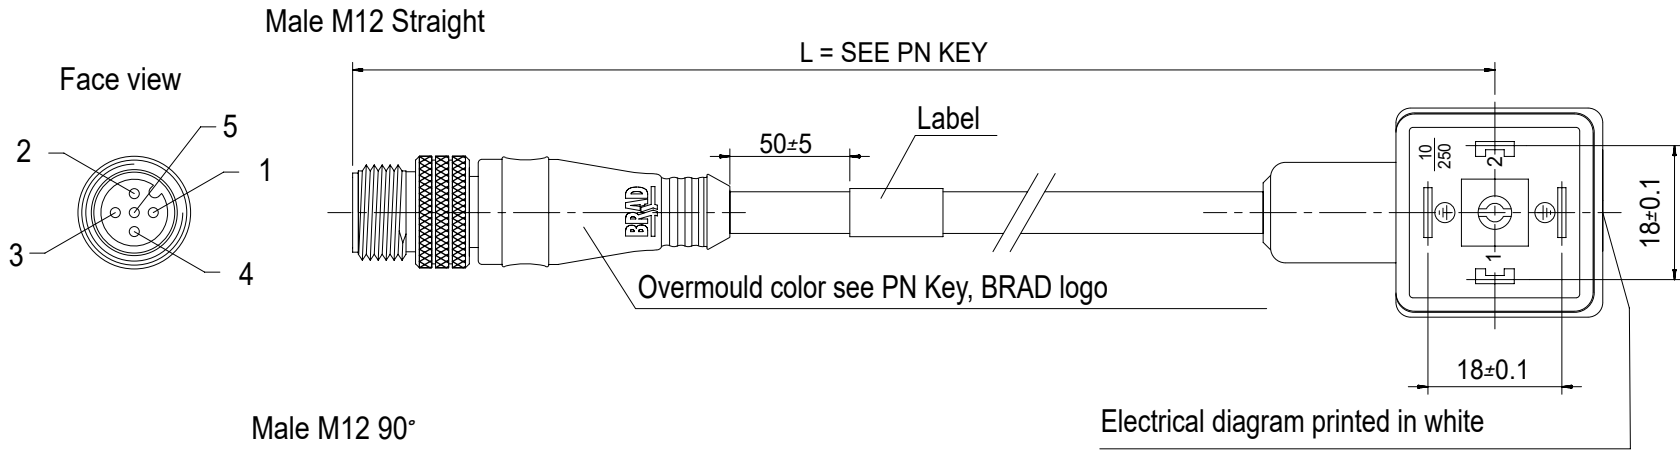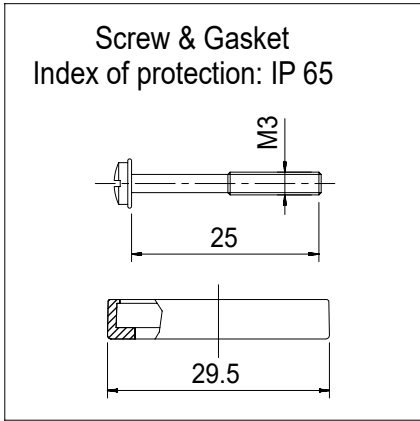

PART No MATRIX - PN Key

E	8	5	X	X	X	X	X	X	X	X	X	X	X	X
E = Form A (18mm contact spacing)	8 = MMC Single Keyway	5=5 Pole	Wiring details: 0 = Positive Switching (pin 3&4) 1 = Negative Switching (pin 1&4)		XXX = Cable Type				M = Metres F = Feet	Length: 020=2 Meters 050=5 Meters 200=20 Meters				H=I/D Carrier M12 Overmoulding color: Blank=Black Standard Y=Yellow A=Grey
														Coupling Nut Material: Blank=Standard 1=Stainless Steel 5=Delrin 7=Teflon coat

DIN Earth Position - o'clock & M12 connector body:
0 = Earth H6/H12, MALE Straight
2 = Earth H6/H12, MALE 90°

Electrical configuration:
0 = Without LED/Without circuit
A = S0 24V Yellow LED
B = C4 24V Yellow LED
C = S0 110V Yellow LED
D = C4 110V Yellow LED
E = S0 24V Green LED
F = C4 24V Green LED
G = S0 110V Green LED
H = C4 110V Green LED
J = S0 24V Red LED
K = C4 24V Red LED
L = S0 110V Red LED
M = C4 110V Red LED
S = C4 230V Yellow LED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#515981				molex					
mm		NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED)								E85XXXXXXXXXX DIN A + CORDSETS M12					
								PRODUCT CUSTOMER DRAWING					
4 PLACES ±				EC NO: 837779				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
3 PLACES ±				DRWN: PONNAM				2025/10/17		SD-121036-001	PSD	001	C2
2 PLACES ±				CHK'D: GGA				2025/10/28					
1 PLACE ±				APPR: GGA				2025/10/28					
0 PLACES ±				INITIAL REVISION:									
ANGULAR TOL ± °				DRWN: JMARSZALEK				2012/11/08					
				APPR: MIWASIECZKO				2012/11/09					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				FIRST ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER			
						A3-SIZE	121036	SEE SHEET 3	GENERAL MARKET	1 OF 3			

Electrical diagrams

Electrical diagram with circuit S0 (zener diode) for:


<u>CORDSET</u>	<u>CABLE</u>	<u>DIN</u>
M12-PIN 1	N/U	
M12-PIN 2	N/U	
M12-PIN 4	BROWN	
M12-PIN 3	BLUE	
M12-PIN 5	GREEN/YELLOW OR BLACK	

Electrical diagram with circuit C4 (VDR) for:

<u>CORDSET</u>	<u>CABLE</u>	<u>DIN</u>
M12-PIN 1	N/U	
M12-PIN 2	N/U	
M12-PIN 4	BROWN	
M12-PIN 3	BLUE	
M12-PIN 5	GREEN/YELLOW OR BLACK	

Cable type

Table Type	Jacket Material	Jacket Color	Wire cross section	Braid
A23	PVC	Black	0.75mm ²	no
A58	PVC	Black	20AWG	no
B08	PUR	Yellow	18AWG	no
E03	PVC	Black	0.34mm ²	no
E12	PVC	Black	0.5mm ²	no
I12	CEI PVC	Grey	0.5mm ²	no
P12	PUR	Black	0.5mm ²	no
P82	PUR IRR	Orange	0.34mm ²	no
S26	PVC	Yellow	0.34mm ²	yes
B31	PUR	Black	0.5mm ²	no

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#515981				molex							
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)								E85XXXXXXXXXX DIN A + CORDSETS M12							
		MM	INCH	EC NO: 837779 DRWN: PONNAM 2025/10/17 CHK'D: GGA 2025/10/28 APPR: GGA 2025/10/28				PRODUCT CUSTOMER DRAWING							
4 PLACES	±	±													
3 PLACES	±	±													
2 PLACES	±	±													
1 PLACE	±	±													
0 PLACES				INITIAL REVISION:				DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
ANGULAR TOL ± °				DRWN: JMARSZALEK 2012/11/08 APPR: MIWASIECZKO 2012/11/09				SD-121036-001		PSD		001		C2	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				FIRST ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				A3-SIZE		121036		SEE SHEET 3		GENERAL MARKET		2 OF 3			

	10	9	8	7	6	5	4	3	2	1																																																																																																								
F	PART LIST <table><tr><th>Pos.</th><th>Molex PN:</th><th>Engineering No:</th></tr><tr><td>1</td><td>1210350133</td><td>E85000P12M006</td></tr><tr><td>2</td><td>1210360178</td><td>E850A0P12M020</td></tr><tr><td>3</td><td>1210360192</td><td>E850B0P12M006</td></tr><tr><td>4</td><td>1210360193</td><td>E850B0P12M010</td></tr><tr><td>5</td><td>1210360194</td><td>E850B0P12M015</td></tr><tr><td>6</td><td>1210360195</td><td>E850B0P12M020</td></tr><tr><td>7</td><td>1210360196</td><td>E850B0P12M050</td></tr><tr><td>8</td><td>1210360209</td><td>E850B2P12M010</td></tr><tr><td>9</td><td>1210360211</td><td>E850B2P12M030</td></tr><tr><td>10</td><td>1210360356</td><td>E850B0P12M030</td></tr><tr><td>11</td><td>1210360399</td><td>E850B0P12M003</td></tr><tr><td>12</td><td>1210360491</td><td>E850A0A58M010</td></tr><tr><td>13</td><td>1210360492</td><td>E850A0A58M015</td></tr><tr><td>14</td><td>1210360493</td><td>E850A0A58M030</td></tr><tr><td>15</td><td>1210360494</td><td>E850A0A58M050</td></tr><tr><td>16</td><td>1210360495</td><td>E850A0A58M100</td></tr><tr><td>17</td><td>1210360497</td><td>E850B2P12M025G</td></tr><tr><td>18</td><td>1210360559</td><td>E850B0E12M050</td></tr><tr><td>19</td><td>1210360574</td><td>E850B0E12M020</td></tr><tr><td>21</td><td>1210360594</td><td>E850B0P12M100</td></tr><tr><td>22</td><td>1210360596</td><td>E850B2E12M006</td></tr><tr><td>23</td><td>1210360627</td><td>E850B0E12M010</td></tr><tr><td>24</td><td>1210360694</td><td>E850A0A58M006</td></tr><tr><td>25</td><td>1210360708</td><td>E850B0A23M030</td></tr><tr><td>26</td><td>1210360719</td><td>E850B2A23M017</td></tr><tr><td>27</td><td>1210360725</td><td>E850D0A23M030</td></tr><tr><td>28</td><td>1210360754</td><td>E850A0A58M005</td></tr><tr><td>29</td><td>1210360789</td><td>E850D0P12M020</td></tr><tr><td>30</td><td>1210360813</td><td>E850A0A58M007</td></tr><tr><td>31</td><td>1210360816</td><td>E850B0I12M020Y</td></tr><tr><td>32</td><td>1210360817</td><td>E850B0I12M030Y</td></tr><tr><td>33</td><td>1210360821</td><td>E850B2P12M015</td></tr><tr><td>35</td><td>1210361900</td><td>E850B0A23M015</td></tr></table>											Pos.	Molex PN:	Engineering No:	1	1210350133	E85000P12M006	2	1210360178	E850A0P12M020	3	1210360192	E850B0P12M006	4	1210360193	E850B0P12M010	5	1210360194	E850B0P12M015	6	1210360195	E850B0P12M020	7	1210360196	E850B0P12M050	8	1210360209	E850B2P12M010	9	1210360211	E850B2P12M030	10	1210360356	E850B0P12M030	11	1210360399	E850B0P12M003	12	1210360491	E850A0A58M010	13	1210360492	E850A0A58M015	14	1210360493	E850A0A58M030	15	1210360494	E850A0A58M050	16	1210360495	E850A0A58M100	17	1210360497	E850B2P12M025G	18	1210360559	E850B0E12M050	19	1210360574	E850B0E12M020	21	1210360594	E850B0P12M100	22	1210360596	E850B2E12M006	23	1210360627	E850B0E12M010	24	1210360694	E850A0A58M006	25	1210360708	E850B0A23M030	26	1210360719	E850B2A23M017	27	1210360725	E850D0A23M030	28	1210360754	E850A0A58M005	29	1210360789	E850D0P12M020	30	1210360813	E850A0A58M007	31	1210360816	E850B0I12M020Y	32	1210360817	E850B0I12M030Y	33	1210360821	E850B2P12M015	35	1210361900	E850B0A23M015	F
Pos.	Molex PN:	Engineering No:																																																																																																																
1	1210350133	E85000P12M006																																																																																																																
2	1210360178	E850A0P12M020																																																																																																																
3	1210360192	E850B0P12M006																																																																																																																
4	1210360193	E850B0P12M010																																																																																																																
5	1210360194	E850B0P12M015																																																																																																																
6	1210360195	E850B0P12M020																																																																																																																
7	1210360196	E850B0P12M050																																																																																																																
8	1210360209	E850B2P12M010																																																																																																																
9	1210360211	E850B2P12M030																																																																																																																
10	1210360356	E850B0P12M030																																																																																																																
11	1210360399	E850B0P12M003																																																																																																																
12	1210360491	E850A0A58M010																																																																																																																
13	1210360492	E850A0A58M015																																																																																																																
14	1210360493	E850A0A58M030																																																																																																																
15	1210360494	E850A0A58M050																																																																																																																
16	1210360495	E850A0A58M100																																																																																																																
17	1210360497	E850B2P12M025G																																																																																																																
18	1210360559	E850B0E12M050																																																																																																																
19	1210360574	E850B0E12M020																																																																																																																
21	1210360594	E850B0P12M100																																																																																																																
22	1210360596	E850B2E12M006																																																																																																																
23	1210360627	E850B0E12M010																																																																																																																
24	1210360694	E850A0A58M006																																																																																																																
25	1210360708	E850B0A23M030																																																																																																																
26	1210360719	E850B2A23M017																																																																																																																
27	1210360725	E850D0A23M030																																																																																																																
28	1210360754	E850A0A58M005																																																																																																																
29	1210360789	E850D0P12M020																																																																																																																
30	1210360813	E850A0A58M007																																																																																																																
31	1210360816	E850B0I12M020Y																																																																																																																
32	1210360817	E850B0I12M030Y																																																																																																																
33	1210360821	E850B2P12M015																																																																																																																
35	1210361900	E850B0A23M015																																																																																																																
E												E																																																																																																						
D												D																																																																																																						
C												C																																																																																																						
B												B																																																																																																						
A												A																																																																																																						
DOCUMENT STATUS		P1	RELEASE DATE	2025/10/28	11:08:25																																																																																																													
9		8		7		6		5		4		3		2		1																																																																																																		
FORMAT: Met-lega-master-ib-prod-A3																																																																																																																		
REVISION: E1																																																																																																																		
DATE: 2021/05/01																																																																																																																		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#515981				molex E85XXXXXXXXXX DIN A + CORDSETS M12							
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)															
	MM	INCH													
4 PLACES	±		±	EC NO: 837779 DRWN: PONNAM 2025/10/17 CHK'D: GGA 2025/10/28 APPR: GGA 2025/10/28				PRODUCT CUSTOMER DRAWING							
3 PLACES	±		±												
2 PLACES	±		±												
1 PLACE	±		±												
0 PLACES	±		±	INITIAL REVISION:				DOCUMENT NUMBER							
ANGULAR TOL ± °				DRWN: JMARSZALEK 2012/11/08				SD-121036-001							
				APPR: MIWASIECZKO 2012/11/09				PSD							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				FIRST ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		121036		SEE SHEET 3		GENERAL MARKET		3 OF 3	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#515981				molex				
mm		NTS										
GENERAL TOLERANCES (UNLESS SPECIFIED)								E85XXXXXXXXXX DIN A + CORDSETS M12				
	MM	INCH		EC NO: 837779 DRWN: PONNAM 2025/10/17 CHK'D: GGA 2025/10/28 APPR: GGA 2025/10/28				PRODUCT CUSTOMER DRAWING				
4 PLACES	±	±										
3 PLACES	±	±										
2 PLACES	±	±										
1 PLACE	±	±										
0 PLACES	±	±		INITIAL REVISION: DRWN: JMARSZALEK 2012/11/08 APPR: MIWASIECZKO 2012/11/09				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
ANGULAR TOL		± °						SD-121036-001		PSD	001	C2
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				FIRST ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
						A3-SIZE	121036	SEE SHEET 3		GENERAL MARKET		3 OF 3