

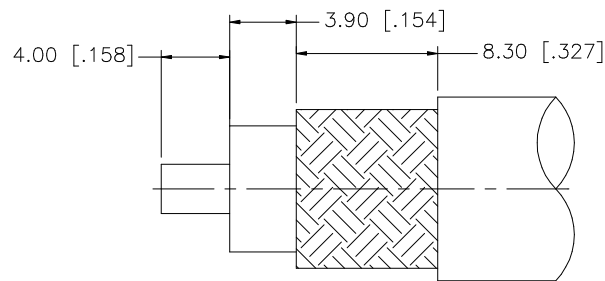
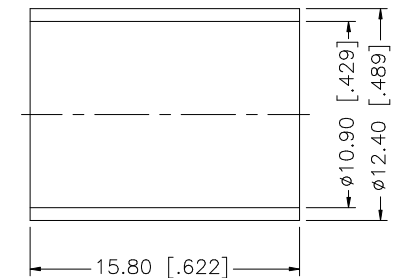


REV.	DATE	DESCRIPTION
NC	05/05/97	INITIAL RELEASE
A	01/11/07	UPDATE DRAWING FORMAT

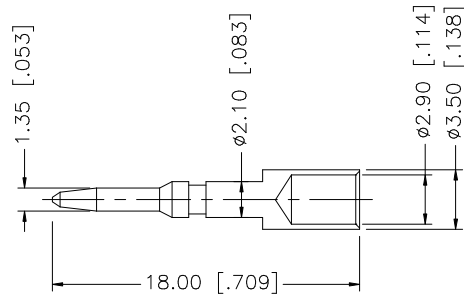

RECOMMENDED
CABLE STRIPPING DIM'S

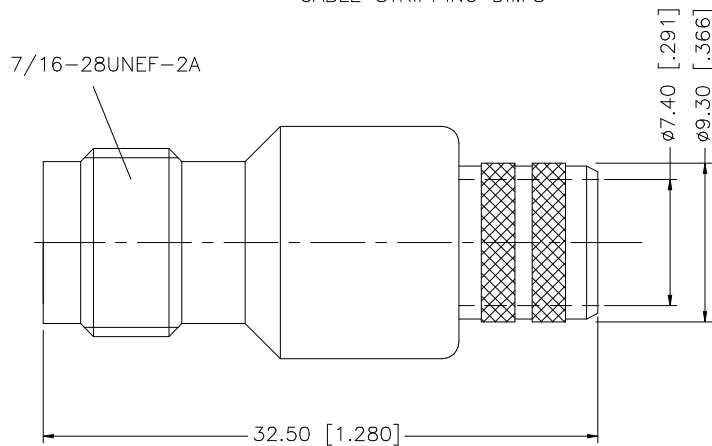

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .118"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex					
7						DRAWN	G.R.S.	01/11/07							
6						CHECKED									
5						ISSUED				PART DESCRIPTION					
4	FERRULE	COPPER	NICKEL	1		DO NOT SCALE DRAWING	SHEET	1 OF 1		TNC REVERSE POLARITY CRIMP JACK (FOR BELDEN 9913, 9914)					
3	CONTACT PIN	BRASS	GOLD	1	PART NO.					122392RP					
2	INSULATOR	TEFLON	NATURAL	1	DWG. NO.					122392RP.DWG					
1	BODY	BRASS	NICKEL	1	CAD FILE					REV. A					
DESCRIPTION		MATERIAL		FINISH	QTY	C:/122/122392RP.DWG				SIZE A		SCALE NA			