


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	
A		REVISED SHAPE	6/18/12	

APPROVED: _____

DATE: _____ TITLE: _____

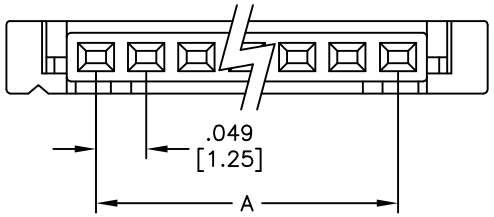

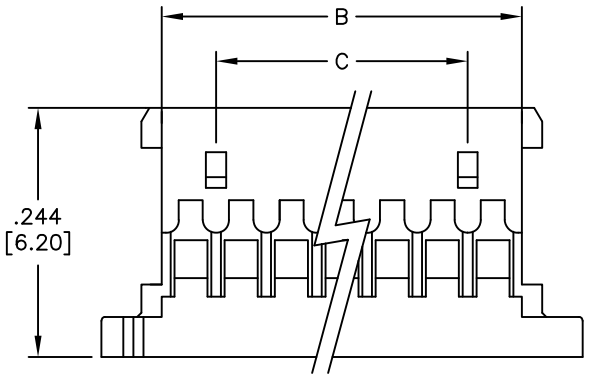

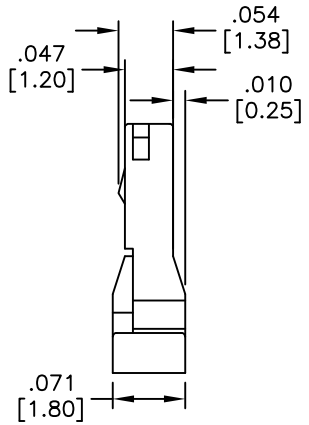

Positions: 2 thru 16, 18, 20, 22, 24, 26, 28, 30

A =.049 [1.25] X No. of Spaces

B =.049 [1.25] X No. of Spaces + .057 [1.45]

C =.049 [1.25] X No. of Spaces – .049 [1.25]

DIM. C 2P, 3P (NONE)

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V–0

Insulator color: White

Electrical:

Voltage rating: 125 VAC/DC max

Current rating: 1 Amp max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: –25°C to +85°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	11/30/10
CHECKED	AH	11/30/10
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .049 [1.25] PITCH CRIMP HOUSING
SINGLE ROW, 2 THRU 30 POSITIONS

SIZE	PART NO.	REV.
X	125CH-G-XX	A

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1