1-Piece Fixing Ties with Arrowhead, with Disc

With a diverse range of fixing possibilities these ties are ideal for use in many different industries, including automotive, aerospace, white goods manufacture and panel building.

Features and benefits


- Easy to install without the need for a tool
- Arrowhead simply locks into place
- Disc adjusts tie for pressures from various directions and minimises access of dust, dirt and water
- Cable tie head always situated in a defined position
- KSFT-types with specially rounded arrowhead minimise the assembly height




The Disc at the head of the T50SOSSFT6.5E protects the bore against dirt and splashes.

Material specification please see page 26.


1-Piece Fixing Ties with Arrowhead, with Disc, for round holes



T50SOSKSFT5.4E



T50SOSSFT6.5E



T50SOSKSFT6.5E

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Disc Ø	Hole Ø (FH)	Panel Thickness	Material	Colour	Tools	Article-No.
PT2ASFT6.5PT0.7-1.5-E	3.4	112.7	20.0	230	16.0	6.3 - 6.7	0.7 - 1.5	PEEK	Beige (BGE)	2;4-6	126-00183
T30SOS-AS-SFT6.5-E	3.5	126.4	25.0	200	16	6.5 - 7.0	0.8 - 1.5	PA66HS	Black (BK)	2;4-6	126-00255
T50SOSKSFT5SE	4.6	156.0	35.0	180	16.0	4.8 - 5.2	0.7 - 1.3	PA66HS	Natural (NA)	2-10	126-00111
	4.6	156.0	35.0	180	16.0	4.8 - 5.2	0.7 - 1.3	PA66HS	Black (BK)	2-10	126-00099
T50SOSKSFT5.4E	4.6	156.0	35.0	180	16.0	5.2 - 5.6	0.7 - 1.3	PA66HS	Black (BK)	2-10	126-00075
T50SOSKSFT6.5E	4.6	156.0	35.0	180	16.0	6.3 - 6.7	0.7 - 1.3	PA66HS	Black (BK)	2-10	126-00081
T50SOSKSFT6.5S2-E	4.6	157.5	35.0	225	16.0	6.3 - 6.7	1.7 - 2.3	PA66HS	Black (BK)	2-10	126-00086
T50SOSSFT6.5E	4.6	158.8	30.0	225	16.0	6.3 - 6.7	1.9 - 2.5	PA66HS	Black (BK)	2-10	126-03102
T50SL8	4.6	165.0	35.0	225	20.0	8.0	0.8 - 1.5	PA66	Black (BK)	2;4-6;8	126-01900
T50SST5	4.6	170.0	31.0	225	16.2	6.1 - 6.5	0.7 - 1.5	PA66	Natural (NA)	2-10	126-02300
	4.6	170.0	31.0	225	16.2	6.1 - 6.5	0.7 - 1.5	PA66HS	Black (BK)	2-10	126-00017
T50SD6	5.0	160.0	31.0	200	18.0	6.3 - 7.5	0.6 - 1.8	PA66HS	Black (BK)	2-10	111-85350
T50MD7	5.0	225.0	59.0	225	16.0	6.8 - 7.2	0.8 - 2.0	PA66HS	Black (BK)	2-10	111-85850

All dimensions in mm. Subject to technical changes.


Recommended Tools									
	2 MK20	3 MK21	4 MK3SP	5 MK3PNSP2	6 EVO7	7 MK7HT	8 MK7P	9 MK6	10 EVO9
	551	551	552	552	554	555	556	557	554

For more information on toolings please refer to the Application Tooling chapter.


Date of issue: 10/2017

1-Piece Fixing Tie with Arrowhead, with Disc

1-Piece Fixing Tie with Arrowhead, with Disc, releasable

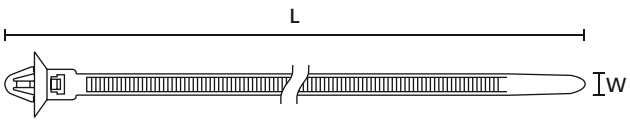

RT50SD6

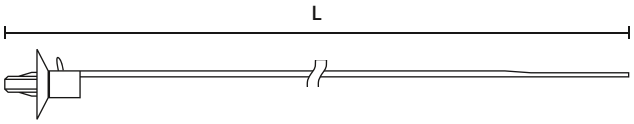

RT50SD6

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Disc Ø	Hole Ø (FH)	Panel Thickness	Material	Colour	Tools	Article-No.
RT50SD6	5.0	160.0	31.0	225	18.0	6.3 - 7.5	0.6 - 1.8	PA66HS	Black (BK)	2-10	111-85480

All dimensions in mm. Subject to technical changes.

Recommended Tools									
	2 MK20	3 MK21	4 MK3SP	5 MK3PNSP2	6 EVO7	7 MK7HT	8 MK7P	9 MK6	10 EVO9
	551	551	552	552	554	555	556	557	554

For more information on toolings please refer to the Application Tooling chapter.

Date of issue: 10/2017

Material Specification Overview

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
Aluminium-alloy	AL	-40 °C to +180 °C	Natural (NA)		• Corrosion resistant • Antimagnetic	RoHS
Chloroprene	CR	-20 °C to +80 °C	Black (BK)		• Weather-resistant • High yield strength	RoHS
Ethylene Tetrafluoroethylene (Tefzel®)	E/TFE	-80 °C to +170 °C	Blue (BU)	UL 94 V0	• Resistance to radioactivity • UV- resistant, not moisture sensitive • Good chemical resistance to: acids, bases, oxidizing agents	RoHS
Polyacetal	POM	-40 °C to +90 °C, (+110 °C, 500 h)	Natural (NA)	UL 94 HB	• Limited brittleness sensitivity • Flexible at low temperature • Not moisture sensitive • Robust on impacts	RoHS
Polyamide 11	PA11	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	• Bio-plastic, derived from vegetable oil • Strong impact resistance at low temperature • Very low moisture absorption • Weather-resistant • Good chemical resistanc	HF RoHS
Polyamide 12	PA12	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	• Good chemical resistance to: acids, bases, oxidizing agents • UV- resistant	HF RoHS
Polyamide 4.6	PA46	-40 °C to +150 °C (5000 h), +195 °C (500 h)	Natural (NA), Grey (GY)	UL 94 V2	• Resistance to high temperatures • Very moisture sensitive • Low smoke sensitiv	HF LFH RoHS
Polyamide 6	PA6	-40 °C to +80 °C	Black (BK)	UL 94 V2	• High yield strength	RoHS
Polyamide 6, high impact modified	PA6HIR	-40 °C to +80 °C	Black (BK)	UL 94 HB	• Limited brittleness sensitivity • Higher flexibility at low temperature	RoHS
Polyamide 6.6	PA66	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK), Natural (NA)	UL 94 V2	• High yield strength	HF RoHS
Polyamide 6.6, glass-fibre reinforced	PA66GF13, PA66GF15	-40 °C to +105 °C	Black (BK)	UL 94 HB	• Good resistance to: lubricants, vehicle fuel, salt water and a lot of solvent	HF RoHS
Polyamide 6.6, heat and UV stabilised	PA66HSW	-40 °C to +105 °C	Black (BK)	UL 94 V2	• High yield strength • Modified elevated max. temperature • UV-resistant	HF RoHS
Polyamide 6.6, heat stabilised	PA66HS	-40 °C to +105 °C	Black (BK), Natural (NA)	UL 94 V2	• High yield strength • Modified elevated max. temperature	HF RoHS
Polyamide 6.6, high impact modified	PA66HIR	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	• Limited brittleness sensitivity • Higher flexibility at low temperature	RoHS
Polyamide 6.6, high impact modified, heat and UV stabilised	PA66HIRHSW	-40 °C to +110 °C	Black (BK)	UL 94 HB	• Limited brittleness sensitivity • Higher flexibility at low temperature • Modified elevated max. temperature • High yield strength, UV-resistant	RoHS
Polyamide 6.6, high impact modified, heat stabilised	PA66HIRHS	-40 °C to +105 °C	Black (BK)	UL 94 HB	• Limited brittleness sensitivity • Higher flexibility at low temperature • Modified elevated max. temperature	RoHS
Polyamide 6.6, high impact modified, ScanBlack	PA66HIR(S)	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	• Limited brittleness sensitivity • Higher flexibility at low temperature	RoHS
Polyamide 6.6, UV-resistant	PA66W	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 V2	• High yield strength • UV-resistant	HF RoHS

Date of issue: 10/2017

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
Polyamide 6.6, with metal particles	PA66MP	-40 °C to +85 °C, (+105 °C, 500 h)	Blue (BU)	UL 94 HB	• High yield strength • Metal and X-Ray detectable	HF RoHS
Polyamide 6.6, with metal particles	PA66MP+	-40 °C to +85 °C	Blue (BU)	not flame retardant	• High yield strength • Metal and x-ray detectable	HF RoHS
Polyamide 6.6 V0	PA66V0	-40 °C to +85 °C	White (WH)	UL 94 V0	• High yield strength • Low smoke emission	HF LFH RoHS
Polyester	SP	-50 °C to +150 °C	Black (BK)	halogen free	• UV-resistant • Good chemical resistance to: most acids, alkaliks and oils	HF LFH RoHS
Polyetheretherketone	PEEK	-55 °C to +240 °C	Beige (BGE)	UL 94 V0	• Resistance to radioactivity • Not moisture sensitive • Good chemical resistance to: acids, bases, oxidizing agents	HF LFH RoHS
Polyethylene	PE	-40 °C to +50 °C	Black (BK), Grey (GY)	UL 94 HB	• Low moisture absorption • Good chemical oilsresistance to: most acids, alcohol and oils	HF RoHS
Polyolefin	PO	-40 °C to +90 °C	Black (BK)	UL 94 V0	• Low smoke emissions	HF LFH RoHS
Polypropylene	PP	-40 °C to +115 °C	Black (BK), Natural (NA)	UL 94 HB	• Floats in water • Moderate yield strength • Good chemical resistance to: organic acids	HF RoHS
Polypropylene, Ethylene-Propylene-Dien-Terpolymere-rubber free of Nitrosamine	PP, EPDM	-20 °C to +95 °C	Black (BK)	UL 94 HB	• Good resistance to high temperatures • Good chemical and abrasion resistance	HF RoHS
Polypropylene with metal particles	PPMP	-40 °C to +115 °C	Blue (BU)	UL 94 HB	• Metal and X-Ray detectable • Heat resistant • Moderate yield strength • Good chemical resistance	RoHS
Polypropylene with metal particles	PPMP+	-40 °C to +85 °C	Blue (BU)	not flame retardant	• High yield strength • Metal and x-ray detectable	HF RoHS
Polyvinylchloride	PVC	-10 °C to +70 °C	Black (BK), Natural (NA)	UL 94 V0	• Low moisture absorption • Good chemical resistance to: acids, ethanol and oil	RoHS
Stainless Steel	SS304, SS316	-80 °C to +538 °C	Natural (NA)	non-burning	• Corrosion resistant • Antimagnetic • Weather resistant • Outstanding chemical resistance	HF LFH RoHS
Thermoplastic Polyurethane	TPU	-40 °C to +85 °C	Black (BK)	UL 94 HB	• High elastic • Good chemical resistance to: acids, bases and oxidizing agents	HF RoHS

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In additon to Tefzel® from DuPont HellermannTyton is also using equivalent E/TFE raw material from other suppliers.
*These details are only rough guide values. They should not be regarded as a material specification and are no substitute for a suitability test. Please see our datasheets for further details.

**More colours on request.

N = **Minimum Loop Tensile Strength for Cable Ties (Newton)**

HF = Halogenfree
LFH = Limited Fire Hazard
RoHS = Restriction of Hazardous Substances

Date of issue: 10/2017