



REV.	DESCRIPTION/ECO NO.	DATE
A	PROD. RELEASED	11/4/98
B	WIRE DESIGN PLACEMENT	12/9/03
	CORRECT.	
C	ADD LOCATION OF WIRES	7/12/07
	IN COMPOUND & NOTES	

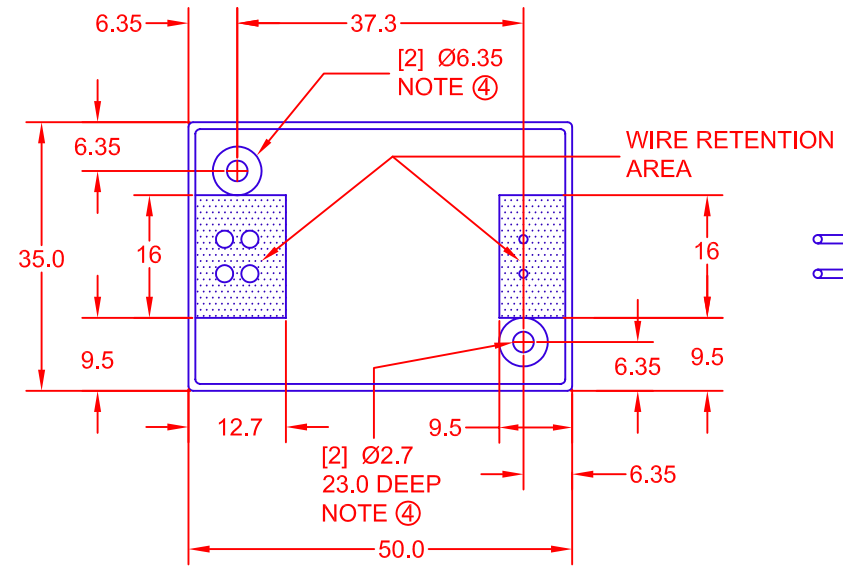

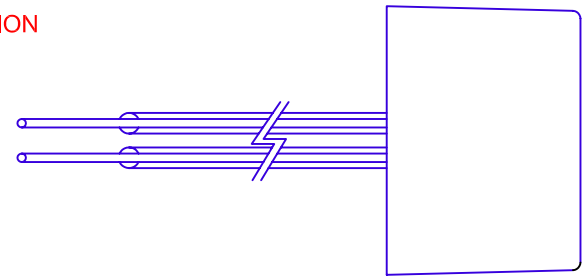

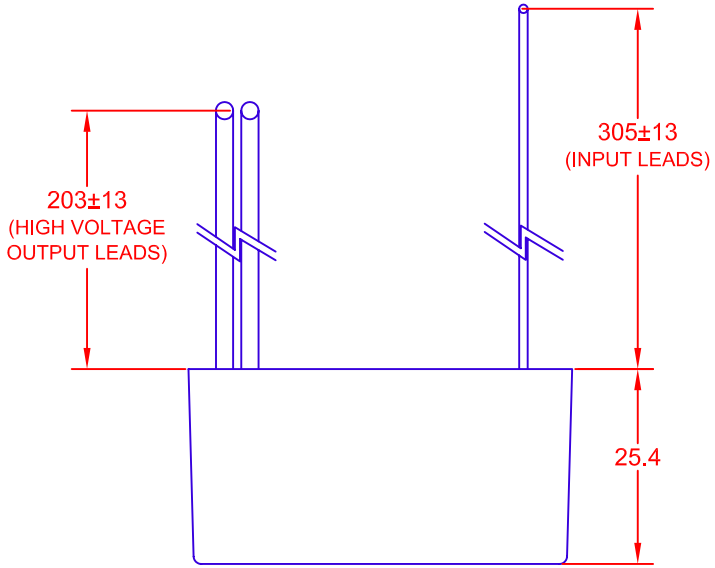

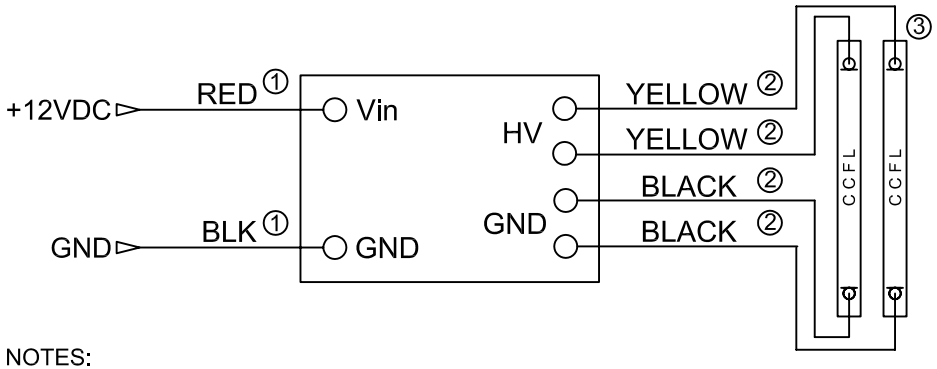

NOTES:

① REVERSE POLARITY TO INVERTER INPUT WILL CAUSE AN OPEN CIRCUIT IN INTERNAL FUSE.

② WIRE SIZE 22 AWG, SOFT FLEXIBLE PVC INSULATION NOMINAL O.D. 2.3mm TEMPERATURE RANGE -80 TO +105 C.

③ REFERENCE DRAWING BXA-12529 FOR SINGLE LAMP OPERATION.

④ USE 6-32-0.75 INCH LONG TYPE F SCREWS IN LOCATIONS.

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	10.0	12.0	13.2
INPUT CURRENT: (mA)	200	260	500
OUTPUT VOLTAGE: (Vrms)	950	1000	1050
OUTPUT CURRENT 2 X (mA)	4.5	5.5	6.5
OUTPUT FREQUENCY: (kHz)	25	35	45
OPERATING TEMP: (CELSIUS)	0	25	50

METRIC

THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS

TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.5
2 PL +/- 0.3
ANGLE +/- 0

JKL COMPONENTS CORPORATION

TITLE: 12 VDC INPUT, DUAL OUTPUT, ENCAPSULATED CCFL INVERTER

DRAWN BY	APP'V'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.
L. WENGSTROM	L.R.	7/12/07	A	55335	BXA-12529/PS1

- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED

SCALE: NONE

RELEASED DATE: 11/4/98

REVISION DATE: 7/12/07

REV. NO.: C

SHEET 1 OF 1