OMRON

Miniature Inductive Prox

E2C

Cylindrical Inductive Sensors with Separate Amplifiers Provide Variable Detecting Capabilities

- Separate amplifier allows sensor to fit in space-confined sites, providing easy access for monitoring and remote adjustments
- Detecting distance and differential travel can be adjusted to meet specific application requirements
- Adjustable differential travel to set switching trigger point available on some amplifiers



Ordering Information

■ SENSORS

Miniature Sizes

Sensor type	Shielded				
Size	2.0 mm dia.	3.5 mm dia.	3.8 mm dia.	M5	5.4 mm dia.
Nominal detecting distance	0.5 mm (0.02 in)	0.8 mm (0.03 in)	0.8 mm (0.03 in)	1 mm (0.04 in)	1 mm (0.04 in)
Part number	**E2C-CR5B**	**E2C-CR8A**	**E2C-CR8B**	**E2C-X1A**	**E2C-C1A**

Standard Sizes

Sensor type	Shielded				Unshielded
Size	M8	M12	M18	M30	40 mm dia.
Nominal detecting distance	1.5 mm (0.06 in)	2 mm (0.08 in)	5 mm (0.20 in)	10 mm (0.39 in)	20 mm (0.79 in)
Part number	**E2C-X1R5A**	**E2C-X2A**	**E2C-X5A**	**E2C-X10A**	**E2C-C20MA**

■ AMPLIFIERS

Socket-Mount Types

Size	1/16 DIN		Miniature			
Applicable sensors	All models		E2C-CR8A, E2C-CR8B, E2C-X1A, E2C-C1A, E2C-X1R5A		E2C-CR5B	
Supply voltage	90 to 264 VAC, 50/60 Hz	10 to 30 VDC	10 to 30 VDC			
Output type	Transistor and relay	Open collector NPN and PNP	NPN	PNP	NPN	PNP
Part number	**E2C-AK4A**	**E2C-AM4A**	**E2C-GE4A**	**E2C-GF4A**	**E2C-GE4B**	**E2C-GF4B**

■ AMPLIFIERS

Track-Mount Types

Size	Prewired	Screw terminal
Applicable sensors	E2C-CR8A, E2C-X1A, E2C-C1A E2C-X1R5A, E2C-X2A	E2C-CR8A, E2C-X1A, E2C-C1A, E2C-X1R5A
Supply voltage	10 to 30 VDC,	
Output type	NPN with alarm output	Open collector NPN and PNP
Part number	**E2C-JC4AP**	**E2C-WH4AF**

■ ACCESSORIES

Description			Part number
Mounting brackets for sensors		Fits 3.5 mm and 3.8 mm dia. unthreaded sensor	**Y92E-F3R5**
		Fits M8 size threaded sensor	**Y92E-B8**
		Fits M12 size threaded sensor	**Y92E-B12**
		Fits M18 size threaded sensor	**Y92E-B18**
		Fits M30 size threaded sensor	**Y92E-B30**
Sockets for amplifiers	E2C-AK4A amplifier	Bottom surface or track mounting, top screw terminals	**P2CF-11**
		Panel mounting, bottom solder terminal	**PL11**
		Back mounting, for use with Y92F-30 mounting adapter, bottom screw terminals	**P3G-11**
	E2C-AM4A amplifier	Bottom surface or track mounting, top screw terminals	**P2CF-08**
		Panel mounting, bottom solder terminals	**PL08**
		Back mounting, for use with Y92F-30 mounting adapter, bottom screw terminals	**P3G-08**
	E2C-G❑4❑ amplifiers	Bottom surface or track mounting, top screw terminals	**PYF08A-E**
		Panel mounting, bottom solder terminals	**PY08**
		Bottom surface mounting, bottom screw terminals	**PYF08M**
Panel mounting adapters for E2C-A❑4A amplifiers		Fits behind panel; ideal for side by side installation. Use P2CF-❑❑ sockets.	**Y92F-30**
		Installs through panel front; amplifier face fits bezel, rear of amplifier clips to adapter. Use P3G-❑❑ sockets. Charcoal gray.	**Y92F-70**
Protective covers for E2C-A❑4A amplifiers		Hard plastic cover; not for use with Y92F-70 panel adapter	**Y92A-48**
		Soft plastic cover; not for use with Y92F-70 panel adapter	**Y92A-48D**
Mounting track		DIN rail, 50 cm (1.64 ft) length	**PFP-50N**
		DIN rail, 1 m (3.28 ft) length	**PFP-100N**
		End plate	**PFP-M**
		Spacer	**PFP-S**

■ REPLACEMENT PARTS

Description		Part number
Mounting hardware includes one pair of metal nuts and washers	Fits M5 size sensors (supplied with each sensor)	**M5-MHWS**
	Fits M8 size sensors (supplied with each sensor)	**M8-MHWS**
	Fits M12 size sensors (supplied with each sensor)	**M12-MHWS**
	Fits M18 size sensors (supplied with each sensor)	**M18-MHWS**
	Fits M30 size sensors (supplied with each sensor)	**M30-MHWS**

Specifications

■ MINIATURE SENSORS

Part number		E2C-CR5B	E2C-CR8A	E2C-CR8B	E2C-X1A	E2C-C1A
Sensor type		Inductive				
Body	Size	2.0 mm dia.	3.5 mm dia.	3.8 mm dia.	M5	5.4 mm dia.
	Type	Shielded				
Required amplifier		E2C-AK4A, E2C-AM4A, E2C-GE4B or E2C-GF4B	E2C-AK4A, E2C-AM4A, E2C-GE4A, E2C-GF4A, E2C-JC4AP or E2C-WH4AF			
Detectable object type		Metallic objects				
Usable setting distance at ambient (with standard target)		0 to 0.5 mm (0 to 0.02 in)	0 to 0.8 mm (0 to 0.03 in)		0 to 1.0 mm (0 to 0.04 in)	
Usable setting distance at 0° to 40°C (with standard target)		0 to 0.7 mm (0 to 0.028 in)	0 to 1.2 mm (0 to 0.047 in)		0 to 1.5 mm (0 to 0.059 in)	
Standard target size (mild steel, L x W x H)		5 x 5 x 1 mm (0.20 x 0.20 x 0.04 in)				
Differential travel		See "Differential Travel" tables				
Response frequency		1 kHz				
Materials	Housing	304 stainless steel				Nickel-plated brass
	Sensing face	ABS				
	Cable sheath	Polyethylene				
Mounting		—	Optional mounting strap Y92E-F3R5, order separately		Two lock washers and M5 nuts included	—
Connections	Prewired	Two-conductor cable, 3 m (9.8 ft) length				
Weight with cable		10 g (0.4 oz.)	40 g (1.4 oz.)		45 g (1.6 oz.)	
Enclosure ratings	UL	—				
	NEMA	1,2	1, 3, 4, 6, 12, 13			
	IEC 144	IP64	IP67			
Approvals	UL	—				
	CSA	—				
Ambient operating temperature		-25° to 70°C (-13° to 158°F)				
Vibration		10 to 55 Hz, 1.5 mm (0.06 in) double amplitude, 2 hours each, X and Y directions				
Shock		50 G's, 3 times each, X and Y directions				

■ STANDARD SIZE SENSORS

Part number		E2C-X1R5A	E2C-X2A	E2C-X5A	E2C-X10A	E2C-C20MA
Sensor type		Inductive				
Body	Size	M8	M12	M18	M30	40 mm dia.
	Type	Shielded				Unshielded
Required amplifier		E2C-JC4AP, E2C-AK4A or E2C-AM4A		E2C-AK4A or E2C-AM4A		
Detectable object type		Metallic objects				
Usable setting distance at ambient (with standard target)		0 to 1.5 mm (0 to 0.06 in)	0 to 2 mm (0 to 0.08 in)	0 to 5 mm (0 to 0.20 in)	0 to 10 mm (0 to 0.39 in)	0 to 20 mm (0 to 0.79 in)
Usable setting distance 0° to 40°C (with standard target)		0 to 2 mm (0 to 0.079 in)	0 to 2.5 mm (0 to 0.098 in)	0 to 7 mm (0 to 0.276 in)	0 to 15 mm (0 to 0.591 in)	0 to 28 mm (0 to 1.102 in)
Standard target size (mild steel, L x W x H)		8 x 8 x 1 mm (0.32 x 0.32 x 0.04 in)	12 x 12 x 1 mm (0.47 x 0.47 x 0.04 in)	18 x 18 x 1 mm (0.71 x 0.71 x 0.04 in)	30 x 30 x 1 mm (1.18 x 1.18 x 0.04 in)	50 x 50 x 1 mm (1.97 x 1.97 x 0.04 in)
Differential travel		See "Differential Travel" tables				
Response frequency		800 Hz		350 Hz	100 Hz	50 Hz
Materials	Housing	Nickel-plated brass				
	Sensing face	ABS				
	Cable sheath	Polyethylene				
Mounting		Two lock washers and M8 nuts included. Bracket Y92E-B8 optional.	Two lock washers and M12 nuts included. Bracket Y92E-B12 optional.	Two lock washers and M18 nuts included. Bracket Y92E-B18 optional.	Two lock washers and M30 nuts included. Bracket Y92E-B30 optional.	—
Connections	Prewired	Two-conductor cable, 3 m (9.8 ft) length				
Weight with cable		50 g (1.8 oz.)	60 g (2.1 oz.)	140 g (4.9 oz.)	270 g (9.5 oz.)	300 g (10.6 oz.)
Enclosure ratings	UL	—				
	NEMA	1, 3, 4, 6, 12, 13				
	IEC 144	IP67				
Approvals	UL	—				
	CSA	—				
Ambient operating temperature		-25° to 70°C (-13° to 158°F)				
Vibration		10 to 55 Hz, 1.5 mm (0.06 in) double amplitude, 2 hours each, X and Y directions				
Shock		50 G's, 3 times each, X and Y directions				

■ AMPLIFIERS

Socket-Mount Type

Part number			E2C-AK4A	E2C-AM4A	E2C-GE4A	E2C-GF4A	E2C-GE4B	E2C-GF4B
Supply voltage			90 to 264 VAC, 50/60 Hz	10 to 30 VDC				
Current consumption			55 mA max.	25 mA max.				
Differential travel			See "Differential Travel" tables					
Control output	Relay	Type	SPDT	—				
		Max. load	2 A, 250 VAC (p.f. = 1)	—				
		Min. load	1 mA, 5 VDC	—				
	DC solid-state	Type	Transistor, SPST	One NPN open collector, one PNP open collector	NPN open collector with pull-up	PNP open collector with pull-down	NPN open collector with pull-up	PNP open collector with pull-down
		Max. load	50 mA, 40 VDC	200 mA	100 mA			
		Max. on-state voltage drop	2 VDC	1.5 VDC				
Indicators			Output Operation (red LED) and Output Stability (red LED)		Output Operation (red LED)			
Materials	Case		Plastic					
Mounting			Requires P2CF-11, PL11 or P3G-11 socket (not included). Order separately from Accessories.	Requires P2CF-08, PL08 or P3G-08 socket (not included). Order separately from Accessories.	Requires PYF08A-E, PY08 or PYF08M socket (not included). Order separately from Accessories.			
Connections			Plated steel screw terminals or solder terminals, refer to sockets in Accessories section.					
Weight (not including socket)			250 g (8.8 oz.)	140 g (4.9 oz.)	20 g (0.7 oz.)			
Enclosure ratings	UL		—					
	NEMA		1					
	IEC 144		IP 40					
Approvals	UL		—					
	CSA		—					
Ambient operating temperature			-10° to 55°C (14° to 131°F)					
Vibration			10 to 25 Hz, 2 mm (0.08 in) double amplitude, 2 hours each, X and Y directions					
Shock			10 G's, 3 times each, X and Y directions					

■ AMPLIFIERS

Track-Mount Type

Part number			E2C-JC4AP	E2C-WH4AF
Supply voltage			10 to 30 VDC	
Current consumption			45 mA	25 mA
Differential travel			See "Differential Travel" tables	
Control output	DC solid-state	Type	NPN open collector	One NPN open collector, one PNP open collector
		Max. load	100 mA	200 mA
		Max. on-state voltage drop	1 VDC	0.7 VDC
Alarm output		Type	NPN open collector	Not provided
		Max. load	50 mA	—
Indicators			Output Operation (red LED), Output Stability (green LED)	Output Operation (red LED)
Materials		Case	Plastic	
Mounting			DIN rail track, E39-L48 mounting bracket, or two side through holes	DIN rail track or bottom surface with two through holes
Connections			Prewired, 4-conductor cable, 2 m (6.56 ft) length	Terminal screws or direct connection to S308 sensor controller with E99-C connector (included).
Weight			80 g (2.8 oz.) with cable	80 g (2.8 oz.) with cable
Enclosure ratings		UL	—	
		NEMA	1	
		IEC 144	IP 40	
Approvals		UL	—	
		CSA	—	
Ambient operating temperature			-10° to 55°C (14° to 131°F)	
Vibration			10 to 25 Hz, 2 mm (0.08 in) double amplitude, 2 hours each, X and Y directions	
Shock			10 G's, 3 times each, X and Y directions	

■ DIFFERENTIAL TRAVEL

E2C-AK4A and E2C-AM4A amplifiers

Amplifier part number	Sensor part number	Differential travel (% of detecting distance)	
		At minimum detecting distance	At maximum detecting distance
E2C-AK4A	E2C-CR5B E2C-CR8A E2C-CR8B E2C-X1A E2C-C1A E2C-X1R5A E2C-X2A E2C-X5A E2C-X10A E2C-C20MA	1 to 5%, adjustable	1 to 5%, adjustable
E2C-AM4A	E2C-CR5B E2C-CR8A E2C-CR8B E2C-X1A E2C-C1A E2C-X1R5A E2C-X2A E2C-X5A E2C-X10A E2C-C20MA	1 to 5%, adjustable	1 to 5%, adjustable

E2C-G❑4A, E2C-G❑4B and E2C-WH4AF amplifiers


Amplifier part number	Sensor part number	Differential travel (% of detecting distance)	
		At minimum detecting distance	At maximum detecting distance
E2C-G❑4A	E2C-CR8A,8B	2.0 to 4.7%, fixed	3.8 to 6.0%, fixed
	E2C-X1A	0.9 to 1.9%, fixed	0.4 to 3.8%, fixed
	E2C-C1A	0.5 to 2.6%, fixed	0.1 to 4.3%, fixed
	E2C-X1R5A	1.7 to 4.2%, fixed	2.7 to 6.0%, fixed
E2C-G❑4B	E2C-CR5B	1.6 to 17.6%, fixed	4.4 to 19.2%, fixed
E2C-JC4AP, E2C-WH4AF	E2C-CR8A	2.0 to 4.7%, fixed	3.8 to 6.0%, fixed
	E2C-X1A	0.9 to 1.9%, fixed	0.4 to 3.8%, fixed
	E2C-C1A	0.5 to 2.6%, fixed	0.1 to 4.3%, fixed
	E2C-X1R5A	1.7 to 4.2%, fixed	2.7 to 6.0%, fixed

Operation

■ OUTPUT CIRCUIT DIAGRAMS


E2C-AK4A Amplifier

AC input, transistor and relay outputs

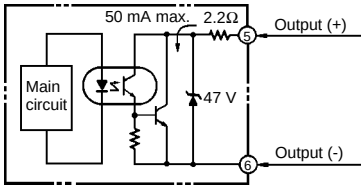


E2C-AM4A Amplifier

DC input, open collector NPN and PNP outputs

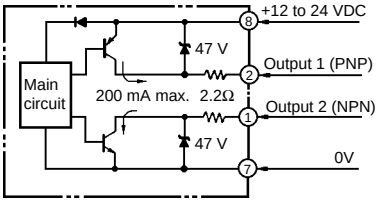


E2C-GE4❑ Amplifiers

DC input, NPN or PNP outputs

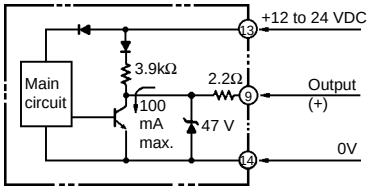


E2C-GF4❑ Amplifiers

DC input, NPN and PNP outputs

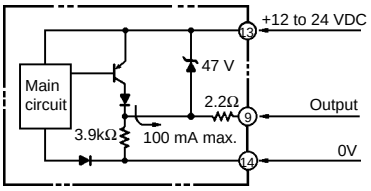


E2C-WH4AF Amplifier

DC input, open collector NPN and PNP outputs

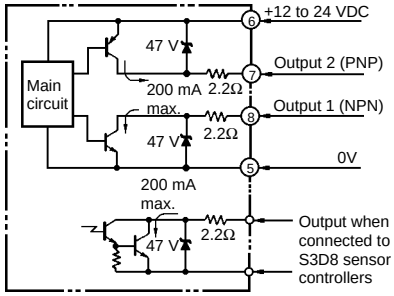

E2C-JC4AP Amplifier

DC input, open collector NPN output with alarm

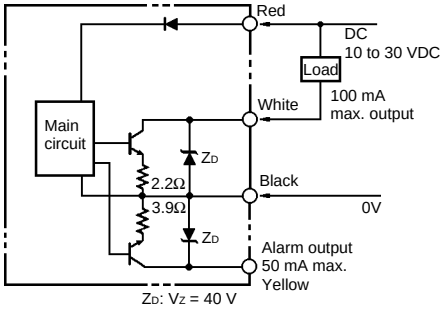


ZD: VZ = 40 V


Engineering Data

■ OPERATING RANGE


Shielded 2 mm dia. sensor
E2C-CR5B

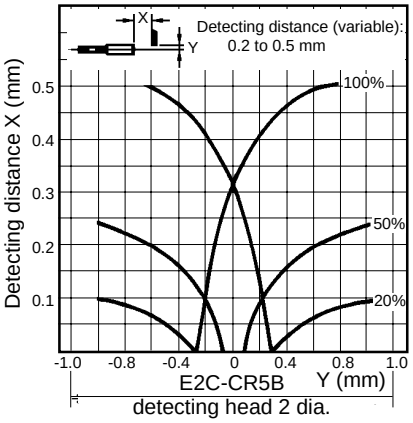


Shielded 3.5 mm & 3.8 mm dia. sensor
E2C-CR8A, E2C-CR8B

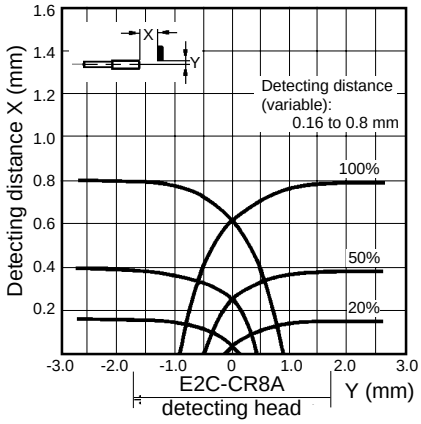


Shielded M5 and 5.4 mm dia. sensors
E2C-X1A, E2C-C1A

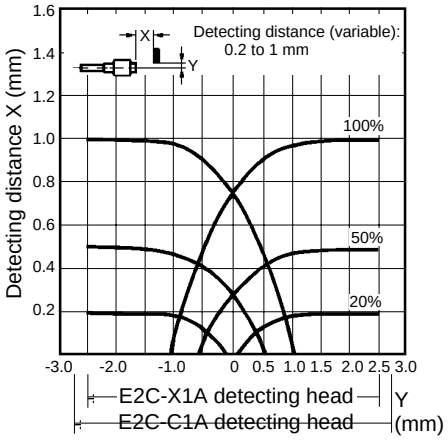


Shielded M8 sensor
E2C-X1R5A

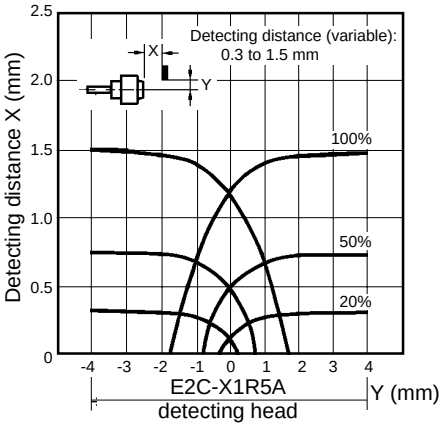


Shielded M12 sensor
E2C-X2A

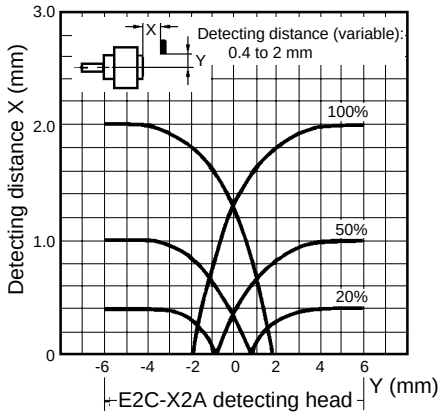


Shielded M18 sensor
E2C-X5A

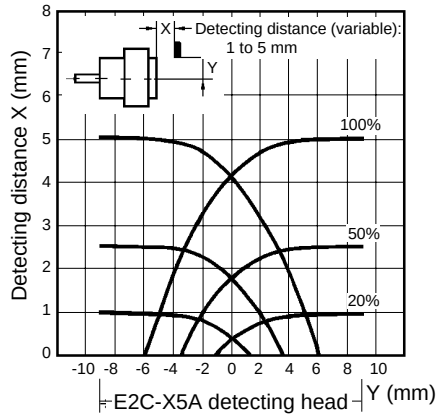

Shielded M30 sensor
E2C-X10A

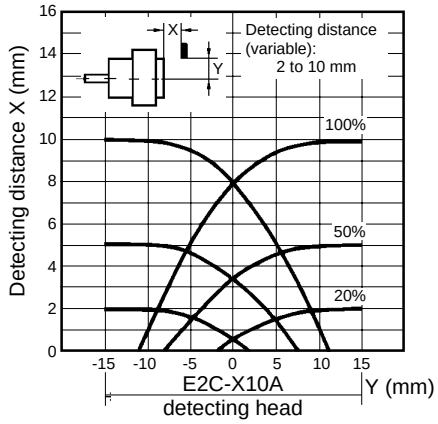


Unshielded 40 mm dia. sensor
E2C-C20MA

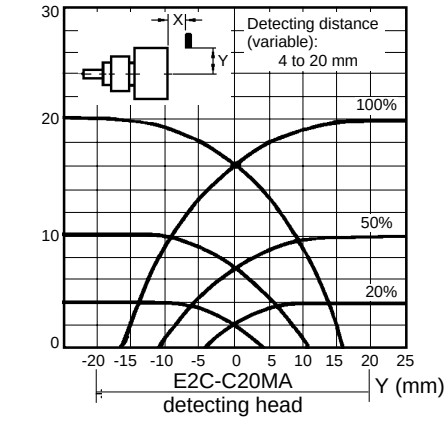


■ DETECTING DISTANCE vs. SIZE AND MATERIAL OF TARGET


Shielded 2 mm dia. sensor
E2C-CR5B

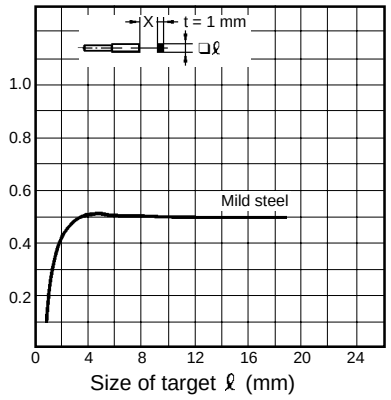


Shielded 3.5 mm & 3.8 mm dia. sensor
E2C-CR8A, E2C-CR8B

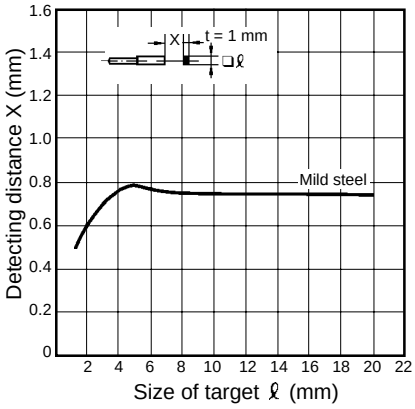


Shielded M5 and 5.4 mm dia. sensors
E2C-X1A, E2C-C1A

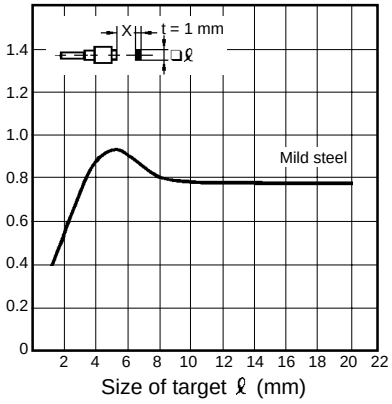


Shielded M8 sensor
E2C-X1R5A

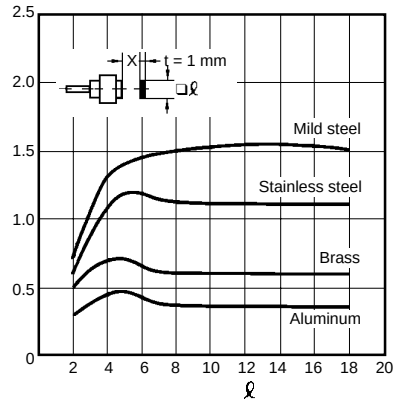


Shielded M12 sensor
E2C-X2A

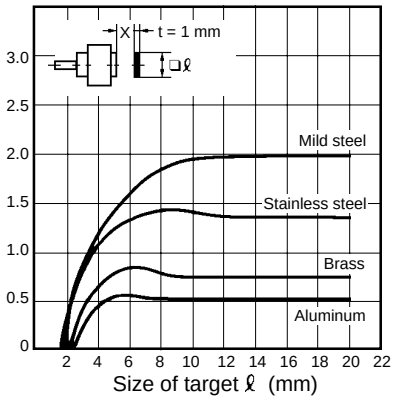


Shielded M18 sensor
E2C-X5A

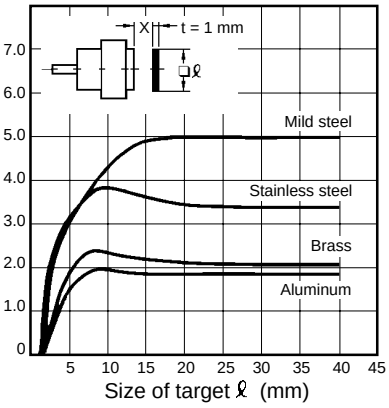

Shielded M30 sensor
E2C-X10A

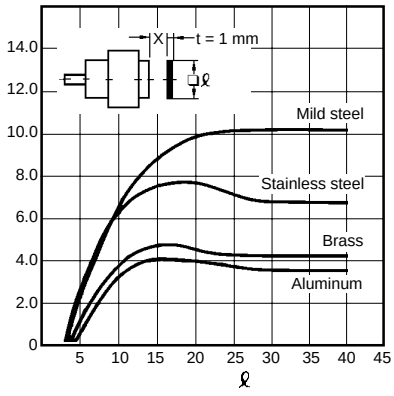

Unshielded 40 mm dia. sensor
E2C-C20MA

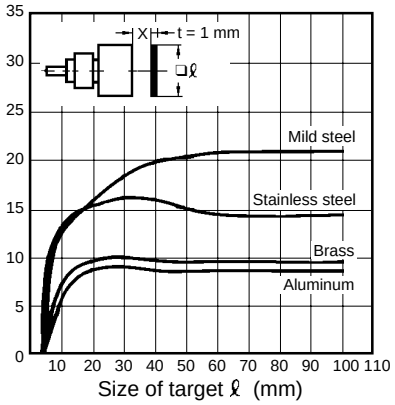

Note: If the target is a nonferrous metal, the operating distance of the proximity sensor decreases. However, with a piece of foil measuring about 0.01 mm (0.0004 inch) in thickness, the detecting distance is equivalent to that with a ferrous metal. Note that the proximity sensor cannot detect extremely thin evaporated films and non-conductive targets.


Dimensions

Unit: mm (inch)


■ SENSORS

Miniature Sizes

E2C-CR5B

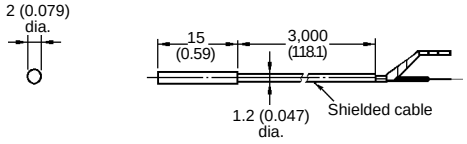


E2C-CR8A, E2C-CR8B

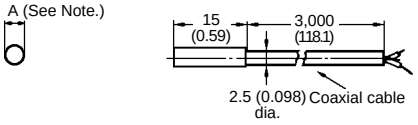


Note: For E2C-CR8A, A= 3.5 mm (0.14 in)
For E2C-CR8B, A=3.8 mm (0.15 in)

E2C-X1A

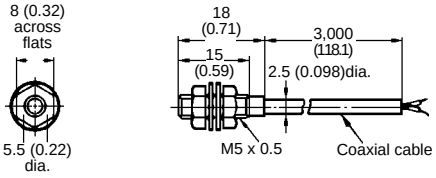


E2C-C1A

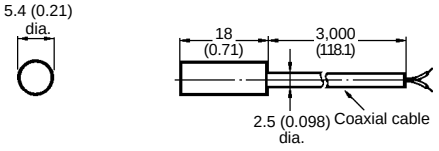


Standard Sizes


E2C-X1R5A

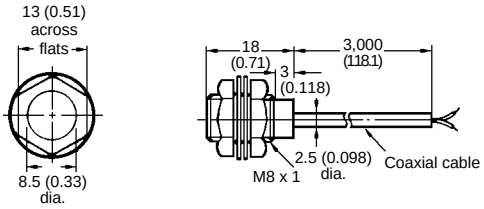


E2C-X2A

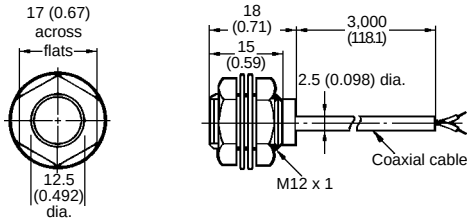


E2C-X5A

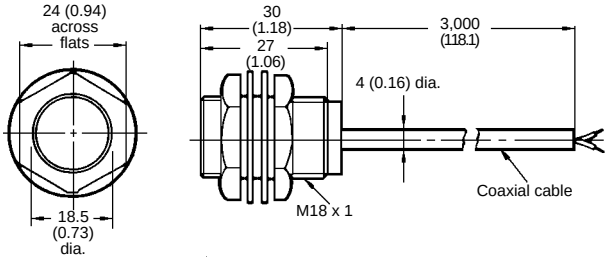

E2C-X10A

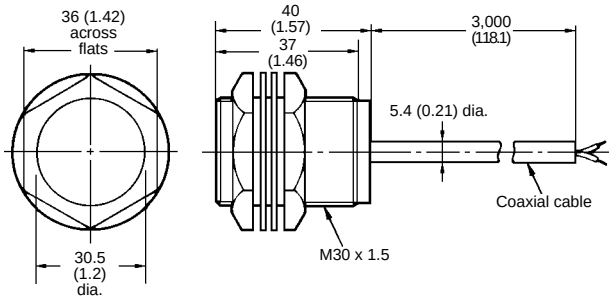


E2C-C20MA

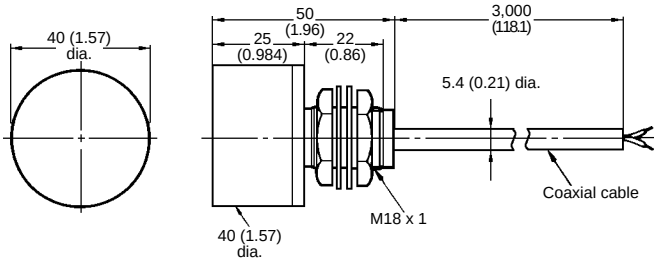

■ SOCKET-MOUNT AMPLIFIERS


1/16 DIN Size

E2C-AK4A AC type, fits 11-pin sockets
E2C-AM4A DC type, fits 8-pin sockets

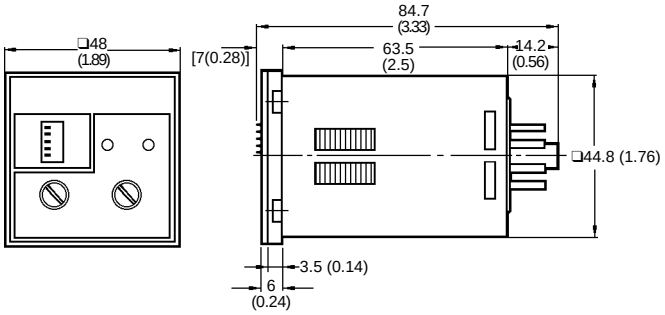


Miniature

E2C-G□4□




■ TRACK-MOUNT AMPLIFIERS


E2C-JC4AP

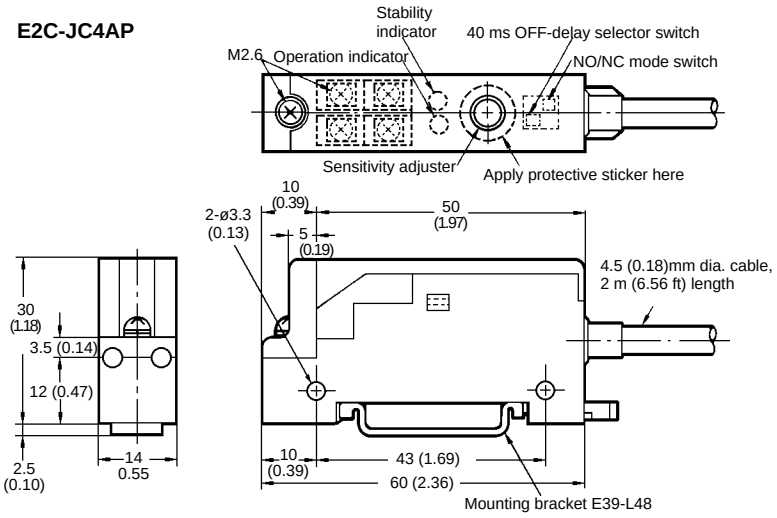

E2C-WH4AF

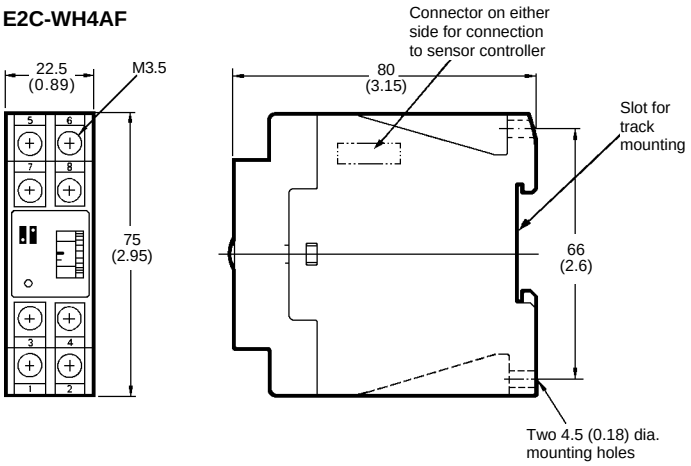


Mounting holes

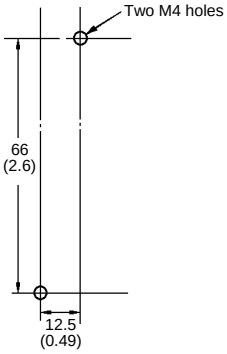

Note: When E2C-WH4AF amplifier is connected to S3D8 sensor controller, using the E99-C connector supplied, the amplifier is powered by the controller and the output is connected to the sensor controller.

■ OPTIONAL MOUNTING BRACKETS FOR STANDARD SIZE THREADED SENSORS




Part number	Drawing dimensions						Applicable sensor models
	A	B	C	D	E	F	
Y92E-B8	18 (0.71) ± 0.2	10 (0.39) max.	18 (0.71)	8 (0.31) dia.	28 (1.10) max.	M4 x 20 bolt	E2C-X1R5A
Y92E-B12	24 (0.94) ± 0.2	12.5 (0.49) max.	20 (0.79)	12 (0.47) dia.	37 (1.46) max.	M4 x 25 bolt	E2C-X2A
Y92E-B18	32 (1.26) ± 0.2	17 (0.67) max.	30 (1.18)	18 (0.71) dia.	47 (1.85) max.	M5 x 32 bolt	E2C-X5A
Y92E-B30	45 (1.77) ± 0.2	17 (0.67) max.	50 (1.97)	30 (1.18) dia.	60 (2.36) max.	M5 x 50 bolt	E2C-X10A


■ SOCKETS FOR AMPLIFIERS

11-Pin Sockets for E2C-AK4A Amplifier

P2CF-11 Bottom surface or track mounting socket

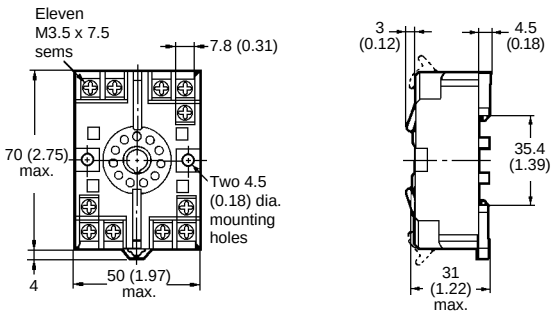


Terminal arrangement




(Top view)


Mounting holes



PL11 Panel mounting socket

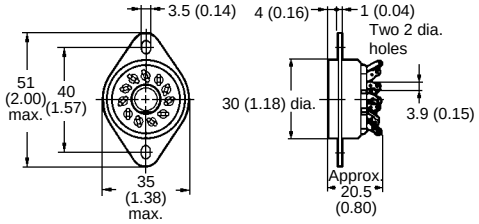


Terminal arrangement




(Bottom view)


Mounting holes



P3G-11 Back mounting socket

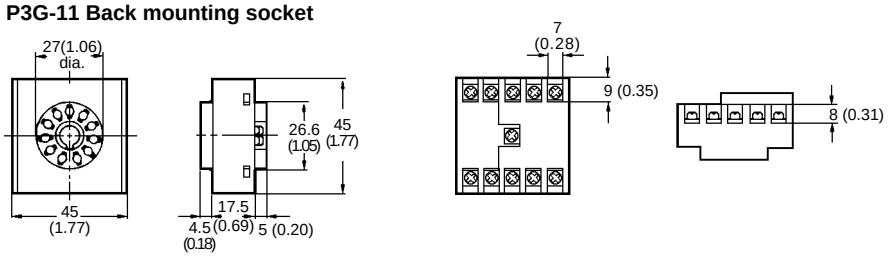


Terminal arrangement




(Bottom view)

8-Pin Sockets for E2C-AM4A Amplifier

P2CF-08 Bottom surface or track mounting socket

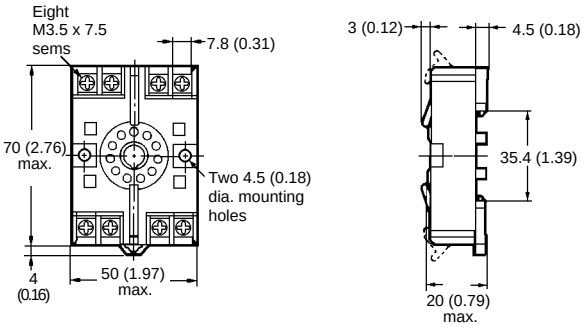


Terminal arrangement




(Top view)

Mounting holes




8-Pin Sockets for E2C-AM4A Amplifier (continued)

PL08 Panel mounting socket

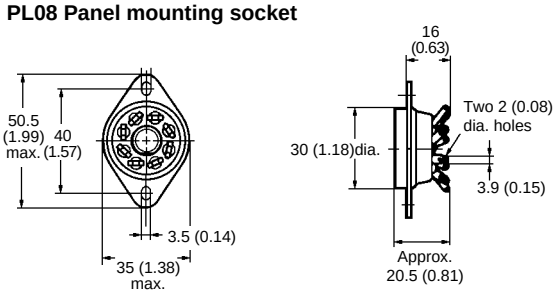


Terminal arrangement




(Bottom view)


Mounting holes



P3G-08 Back mounting socket

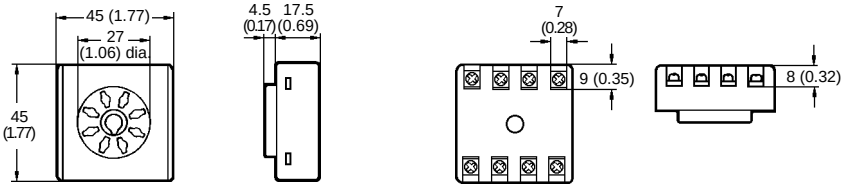


Terminal arrangement




(Bottom view)

Sockets for E2C-G❑4❑ Amplifiers

PYF08A-E Bottom surface or track mounting socket

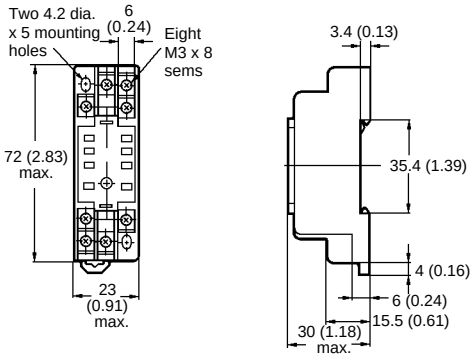


Terminal arrangement




(Bottom view)


Mounting holes

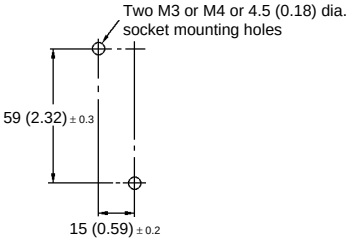

PY08 Panel mounting socket

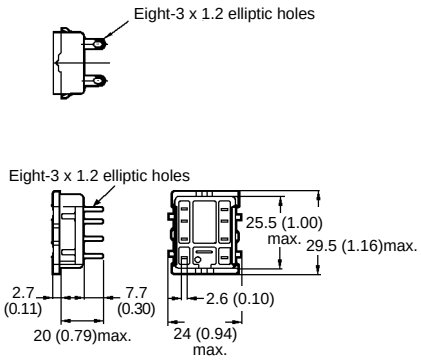


Terminal arrangement




(Bottom view)


Panel cutout



PYF08M Bottom surface mounting socket

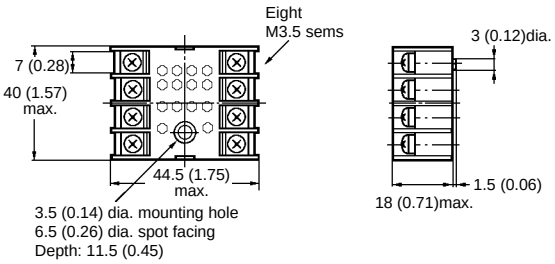


Terminal arrangement



(Top view)

Mounting holes




■ PANEL MOUNTING ADAPTERS


For E2C-A❑4A Amplifiers

Y92F-30 Mounting adapter

Adapter installs behind the panel. It is ideal for side by side installation. Use P2CF-❑❑ sockets

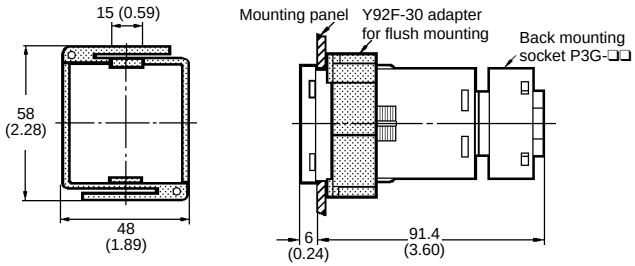


Panel cutout




Note: Recommended panel thickness is 1 to 3.2 mm.

Y92F-70 Mounting adapter


Charcoal gray panel adapter installs through panel front. Amplifier face fits bezel, rear of amplifier clips to adapter. Use P3G-❑❑ sockets.



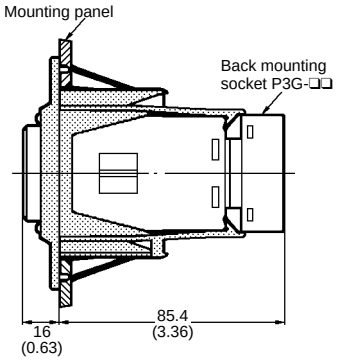

Note: With Type H3BF-8, dimension * should read as 16.7 mm (.657").

Panel cutout




Note: Recommended panel thickness is 1 to 3.2 mm.

■ PROTECTIVE COVERS

For E2C-A❑4A Amplifiers


Y92A-48 Hard plastic cover, Y92A-48D Soft plastic cover

Hard plastic cover Y92A-48 and soft plastic cover Y92A-48D snap onto the front of the amplifier to protect it from dust, dirt and water drip. The Y92A-48 hard plastic cover projects 4 mm from the front of the amplifier. Y92A-48D soft plastic cover fits snugly over the front.




■ MOUNTING TRACK AND ACCESSORIES


PFP-100N/PFP-50N DIN Rail

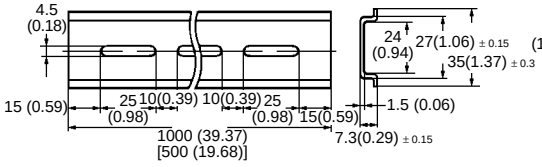

PFP-M End Plate

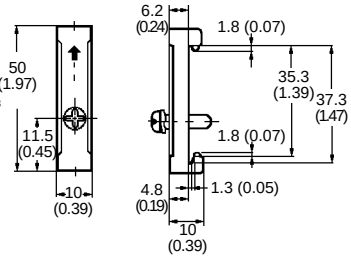

PFP-S Spacer

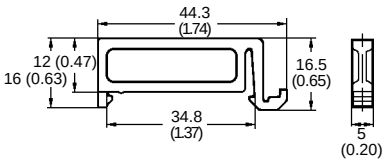

OMRON

OMRON ELECTRONICS LLC
One East Commerce Drive
Schaumburg, IL 60173
1-800-55-OMRON

OMRON ON-LINE
Global - http://www.omron.com
USA - http://www.omron.com/oei
Canada - http://www.omron.com/oci

OMRON CANADA, INC.
885 Milner Avenue
Scarborough, Ontario M1B 5V8
416-286-6465

Cat. No. CEDSAX4 11/01

Specifications subject to change without notice.

Printed in the U.S.A.