


REF. THIS DOC SUPERSEDES A-CAD DOC SD-130035-007 REV-B

FEMALE J3

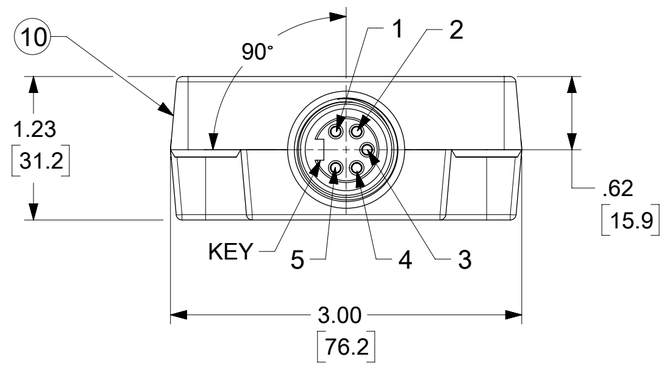


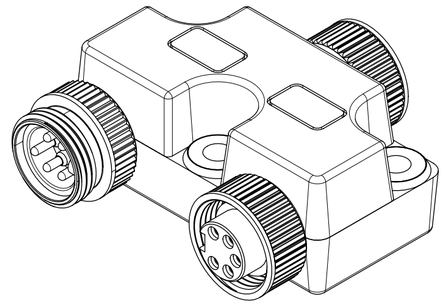


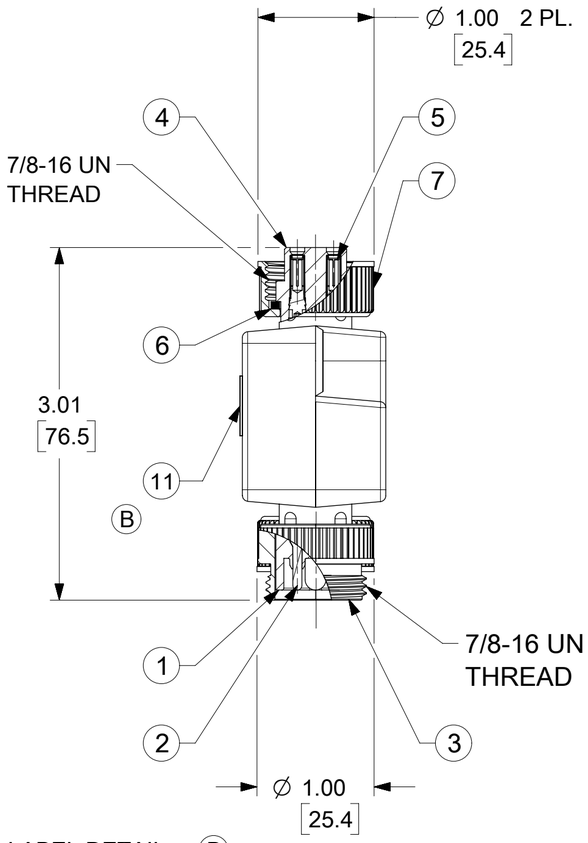


11 ID LABEL DETAIL B

ENG. P/N
VOLTS/AMPS
YY/MM/DD

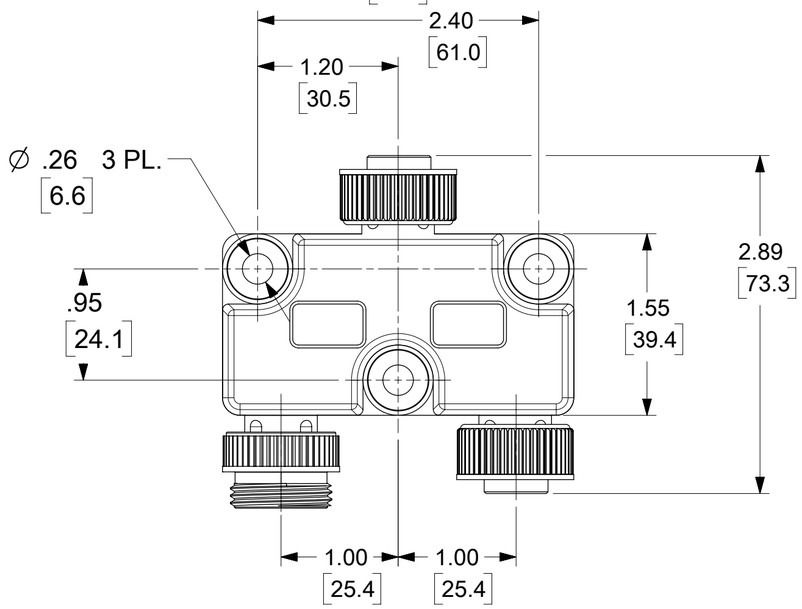

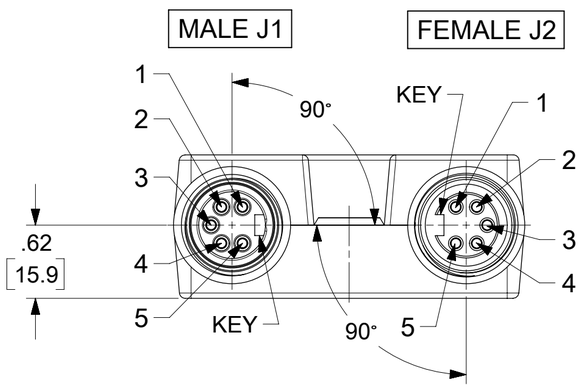

FEMALE J3

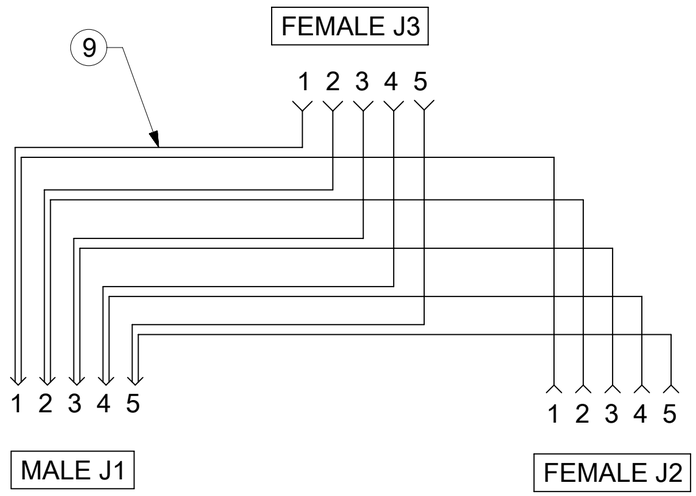

WIRING SCHEMATIC

ITEM	DESCRIPTION	MATERIAL	FINISH
11	ID LABEL	POLYPROPYLENE	CLEAR
10	OVERMOLD	TPE	GRAY
9	WIRE, 18AWG, UL1015	PVC INSULATION	
8	SLEEVE	NYLON	WHITE
7	FEMALE COUPLING	ZINC DIE-CAST	BLACK E-COAT
6	FRICTION RING	NYLON	WHITE
5	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
4	FEMALE INSERT	TPE	BLACK
3	MALE COUPLING	ZINC DIE-CAST	BLACK E-COAT
2	CONTACT PIN	Cu ALLOY	GOLD PLATED
1	MALE INSERT	TPE	BLACK

NOTES:
1. MATERIAL: AS NOTED
2. FINISH: AS NOTED
3. ELECTRICAL:
   VOLTAGE; 600VDC
   CURRENT: 8A
4. TEMP RATING: -20°TO +80°C
5. PROTECTION: IP67 (WHEN MATED)
6. COUPLING THREAD: AS NOTED
7. UL RECOGNIZED FILE: E152210
8. ALL DIMS ARE FOR REFERENCE UNLESS TOLERANCED OR NOTED OTHERWISE

PART NO.	ENG. NO.
1300350071	DN3200

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FP = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS: INCH
SCALE: 1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	±
2 PLACES	±	±
1 PLACE	±	±
0 PLACES	±	±
ANGULAR TOL	± °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: ADD ID LABEL PER MFG REQUEST

EC NO: 709543
DRWN: RSTONE 2022/06/07
CHK'D: ALEON01 2022/06/22
APPR: BWOODMAN 2022/06/27

INITIAL REVISION:
DRWN: BW 2009/08/24
APPR: JM 2009/08/26

molex

MINI-CHANGE 5 POLE PASSIVE Y BLOCK

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1300350071	PSD	000	B

THIRD ANGLE PROJECTION | DRAWING: C-SIZE | SERIES: 130035 | MATERIAL NUMBER: SEE P/N CHART | CUSTOMER: GENERAL MARKET | SHEET NUMBER: 1 OF 1

DOCUMENT STATUS: P1 | RELEASE DATE: 2022/06/27 21:47:07

FORMAT: IN-master-lb-prod-C
REVISION: 01
DATE: 2021/05/01