


PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300480170	E11A06310M010	3' 3" +2.19"/-0" [1M +55.6/-0 mm]
1300480172	E11A06310M050	16' 4" +6.5"/-0" [5M +165.0/-0 mm]


AUX VIEW
SCALE 1:4



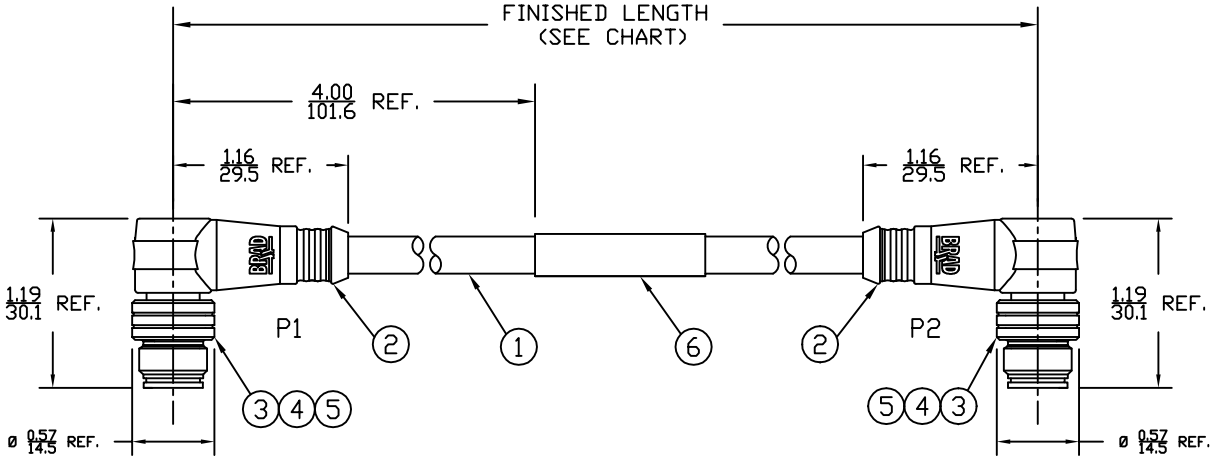


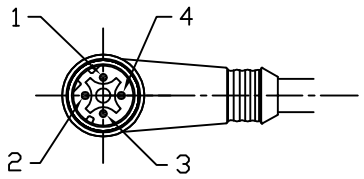

MALE- FACE VIEW



WIRING DIAGRAM

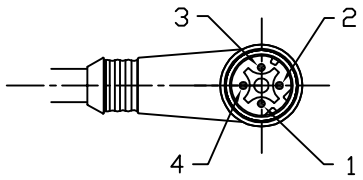

MALE- FACE VIEW

NOTES:

1) MATERIAL: SEE TABLE

2) FINISHES: SEE TABLE

3) CABLE: #22/4 SHIELDED PUR

4) ELECTRICAL DATA:
ACCORDING TO CAT5e ETHERNET STANDARD
MAX. VOLTAGE: 30V
MAX. CURRENT 1.5A

5) ENVIRONMENTAL:
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO 75°C

6) WRAP LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE.

7) ASSEMBLY IS RoHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	LABEL	PLASTIC FILM	BLACK/YELLOW
5	2	INSERT	PUR	BLACK
4	8	PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	2	M12 COUPLING NUT	BRASS	NICKEL
2	2	OVERMOLD	PUR	BLACK
1	1	ETHERNET CABLE-CAT5E	PUR JACKET	TEAL

SD RELEASE 7/13/09 —
EC NO: WEU2010-0005
DRWN: VOU
CH'KD: BWOODMAN
APPR: JFMURPHY 2009/07/20
DESCRIPTION
1
REV

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±----	±----
3 PLACES	±----	±.005
2 PLACES	±----	±.010
1 PLACE	±----	±.020
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 3:4
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: VOU DATE: 2009/07/06
CHECKED BY: BWOODMAN DATE: 2009/07/31
APPROVED BY: ---- DATE: ----

TITLE: MICRO-CHANGE CABLE ASSY
4P M/MP 90/90 D-CODE
#22/4 SHIELDED PUR

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-120108-025
SHEET NO.: 1 OF 1

SIZE: A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION