



MATERIAL NO.	ENGINEERING NO.	STD MATERIAL	UV MATERIAL
1300550014	ENSP6F5	1A	
1300550015	ENSP6F5-V		1B

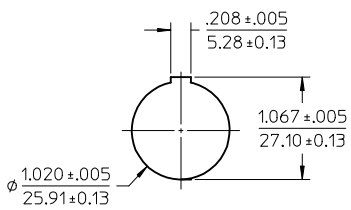


PANEL CUT OUT
PANEL THK: .125 MAX. W/GASKET
.187 MAX. W/OUT GASKET
.062 MIN.

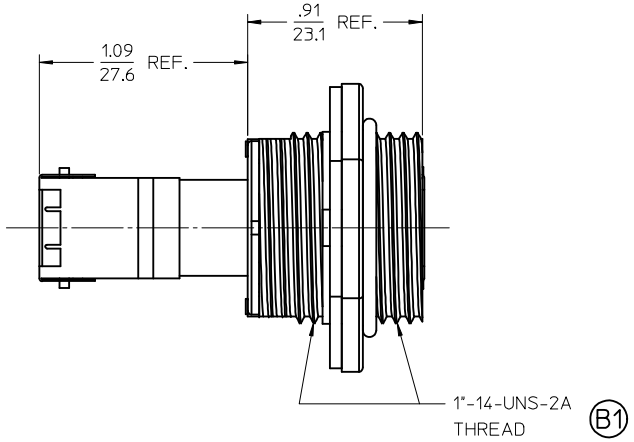

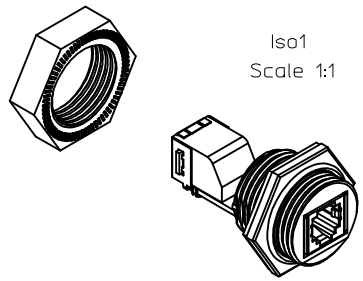

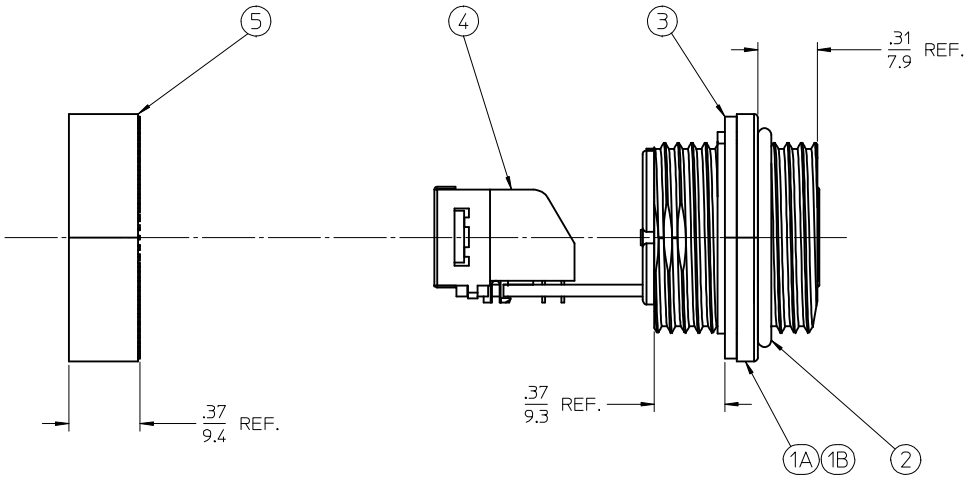

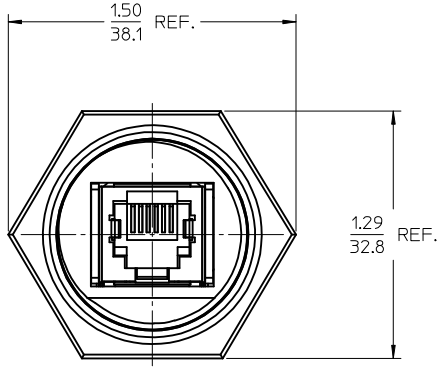

NOTES:
1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. ELECTRICAL SPEC: VOLTAGE 125 VDC, CURRENT: 1.5 AMPS
4. OPERATING TEMP: -20 TO 80°C (-4 TO 176°F)
5. ENVIRONMENTAL: IP67

ITEM	DESCRIPTION	MATERIAL	FINISH
5	PANEL NUT	ABS	BLACK
4	RJ-11/PCB SUB ASSEMBLY		
3	BULKHEAD GASKET	NITRILE	BLACK
2	O-RING	VITON	BROWN
1B	RECEPTACLE HOUSING (UV)	ASA	BLACK
1A	RECEPTACLE HOUSING	ABS	BLACK

CORRECT THREAD DIM
EC NO: IPG2017-0838 2017/03/03
DRWN:MZIELINSKI 2017/03/06
CH'KD:RSTONE 2017/03/13
APPR:BWOODMAN
DESCRIPTION
B1
REV

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
ANGULAR ±---°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 2:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

	DRAWN BY	DATE
	RSTONE	2010/06/24
	CHECKED BY	DATE
	B.WOODMAN	2010/06/25
	APPROVED BY	DATE
	DTITUS	2010/06/28

TITLE: INDUSTRIAL ETHERNET RJ-11 BULKHEAD FEED THRU

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-130055-001
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION