

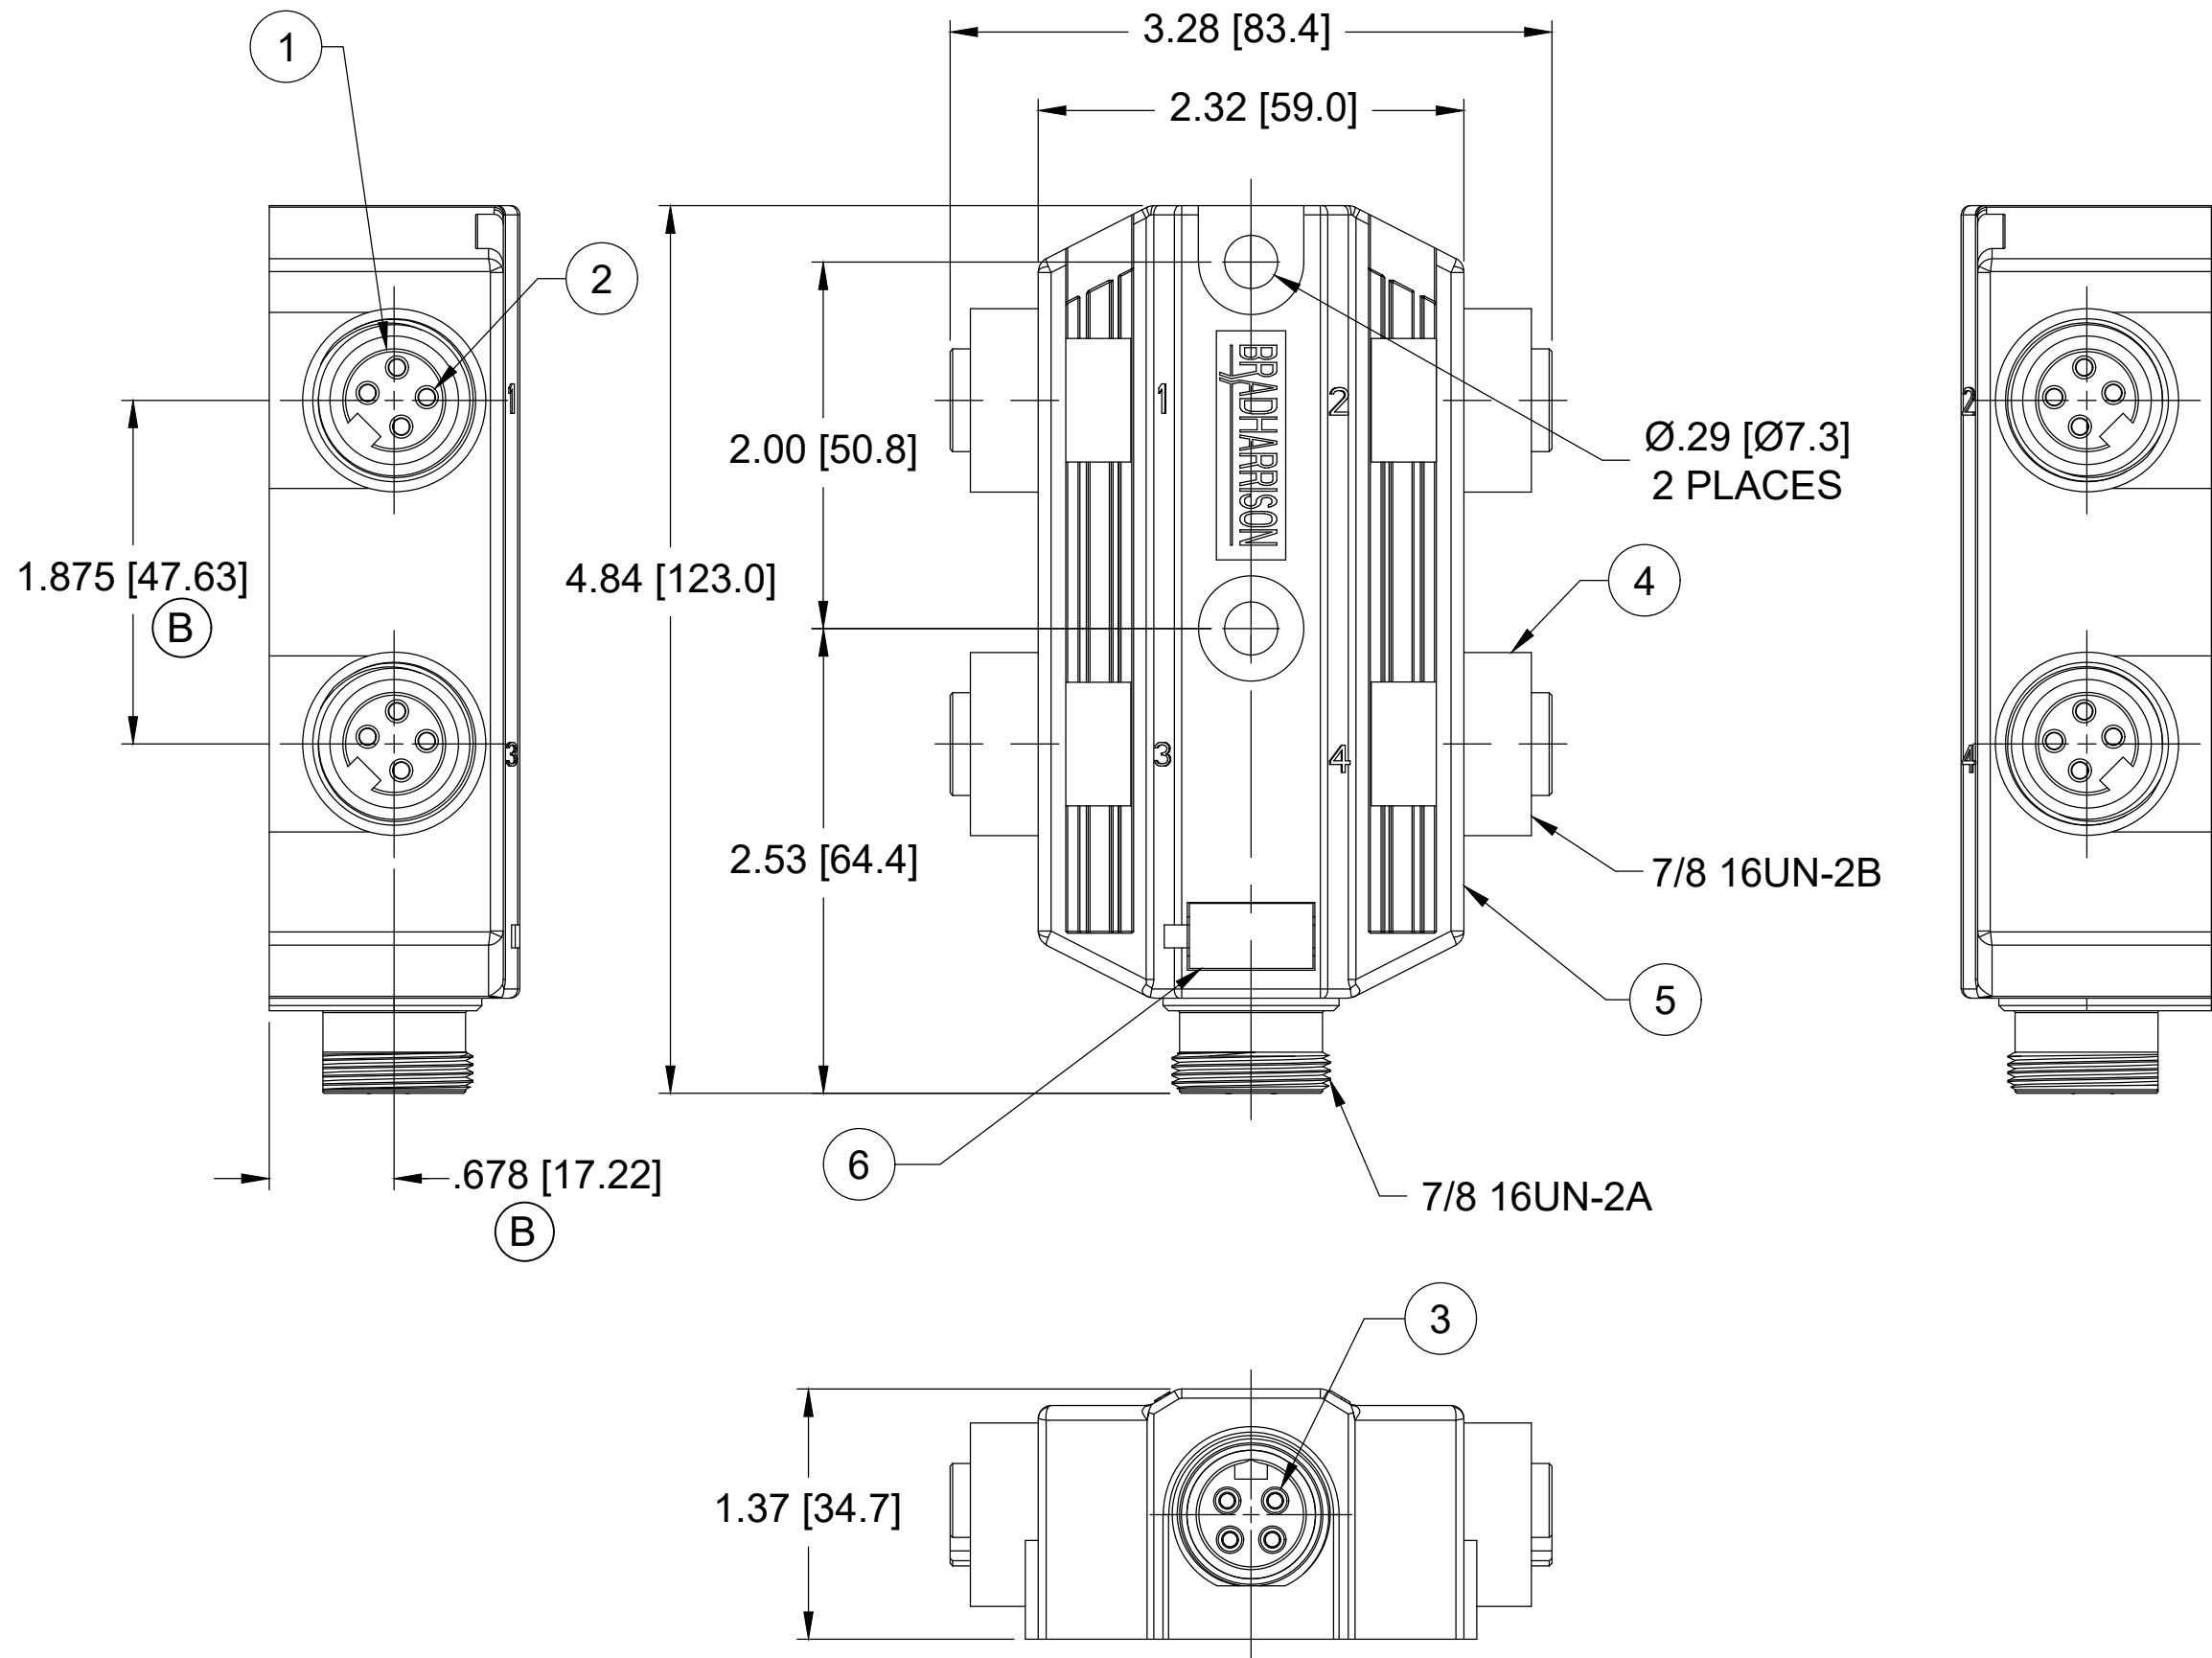




MATERIAL NUMBER	ENGINEERING NUMBER
1300600065	DNAUX4000

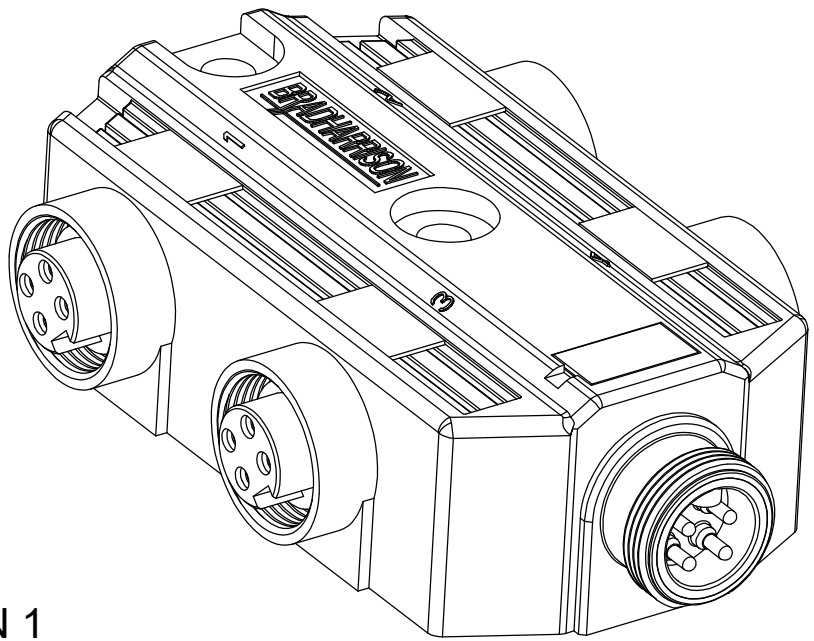

SCHEMATIC

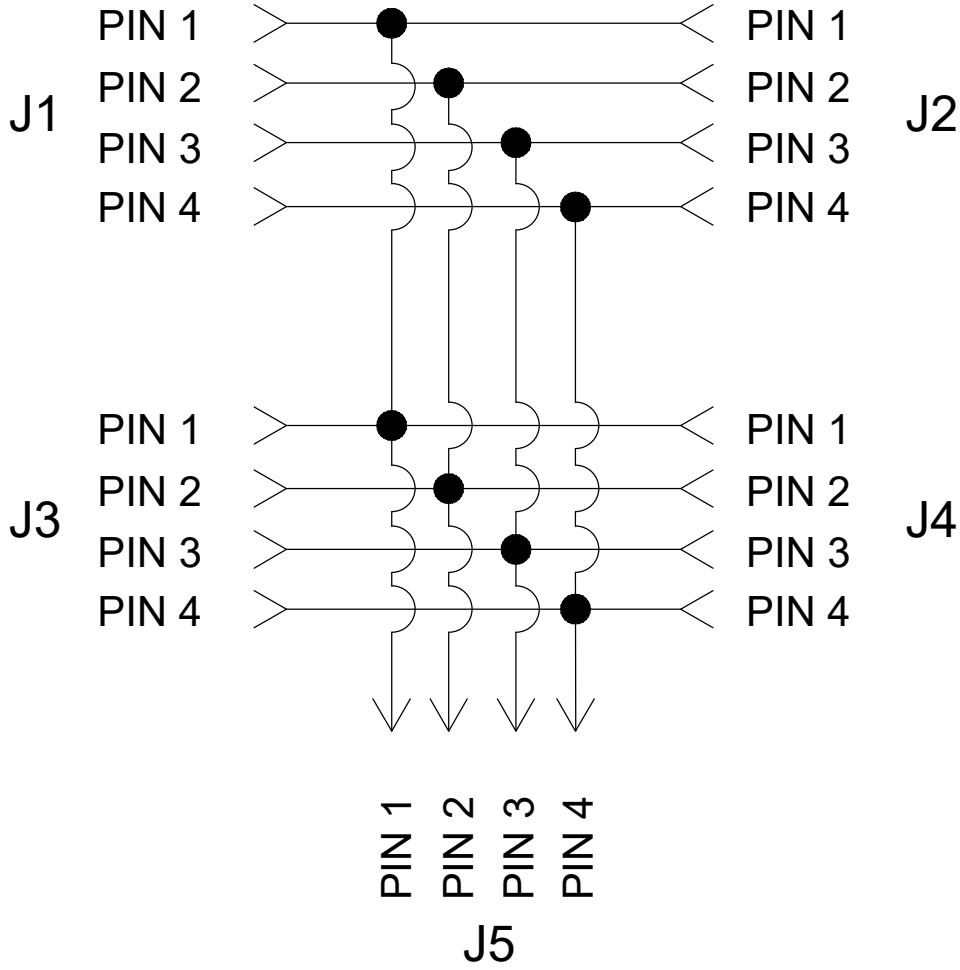

FEMALE FACE VIEW




MALE FACE VIEW

NOTES:

- MATERIAL: AS NOTED
- FINISH: AS NOTED
- ELECTRICAL:
VOLTAGE RATING: 600 VAC/VDC
CURRENT: 10A
- TEMP RATING: 0° TO +60°C
- PROTECTION: IP67 (WHEN MATED)
- COUPLING THREAD- AS NOTED
- UL LISTED FILE: E152210 (B)
- ALL DIMENSIONS ARE FOR REFERENCE
UNLESS TOLERANCED OR NOTED OTHERWISE

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	TPE	YELLOW
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL
4	RECEPTACLE SHELL	ZINC DIE CAST	BLACK E-COATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
	POTTING MATERIAL	EPOXY	TRANSLUCENT

DOCUMENT STATUS	P1	RELEASE DATE	2020/10/23	13:29:09
-----------------	----	--------------	------------	----------

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
FA =0 FE =0 FP =0	DIMENSION UNITS		SCALE		CURRENT REV DESC: ITEM#1 WAS PVC. ADDED UL LISTED NO. ADDED DIM.										
	INCH/MM		NTS												
	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 645633 DRWN: ABENJAMINLW2020/09/09 CHK'D: RSTONE2020/09/29 APPR: BWOODMAN2020/10/23 INITIAL REVISION: DRWN: KJOZWIK2010/01/25 APPR: JFMURPHY2010/01/29 ANGULAR TOL ± 0.5 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										
		mm	INCH												
4 PLACES		± ----	± ----												
3 PLACES		± ----	± ----												
2 PLACES		±0.13	±0.01												
1 PLACE		±0.25	±0.02												
DIVISIONAL SYMBOLS	0 PLACES		± ----	± ----	DOCUMENT NUMBER SD-130060-010					DOC TYPE PSD		DOC PART 001		REVISION B	
THIRD ANGLE PROJECTION				DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER			
				C-SIZE		130060		SEE CHART		GENERAL MARKET		1 OF 1			