


13	12	11	10	9	8	7	6	5	4	3	2	1
POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH								
3	1300640065	CC3030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640187	CC4030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640245	CC4030A48M100	32	10M +318-0MM (32'10" +12.5"-0")								

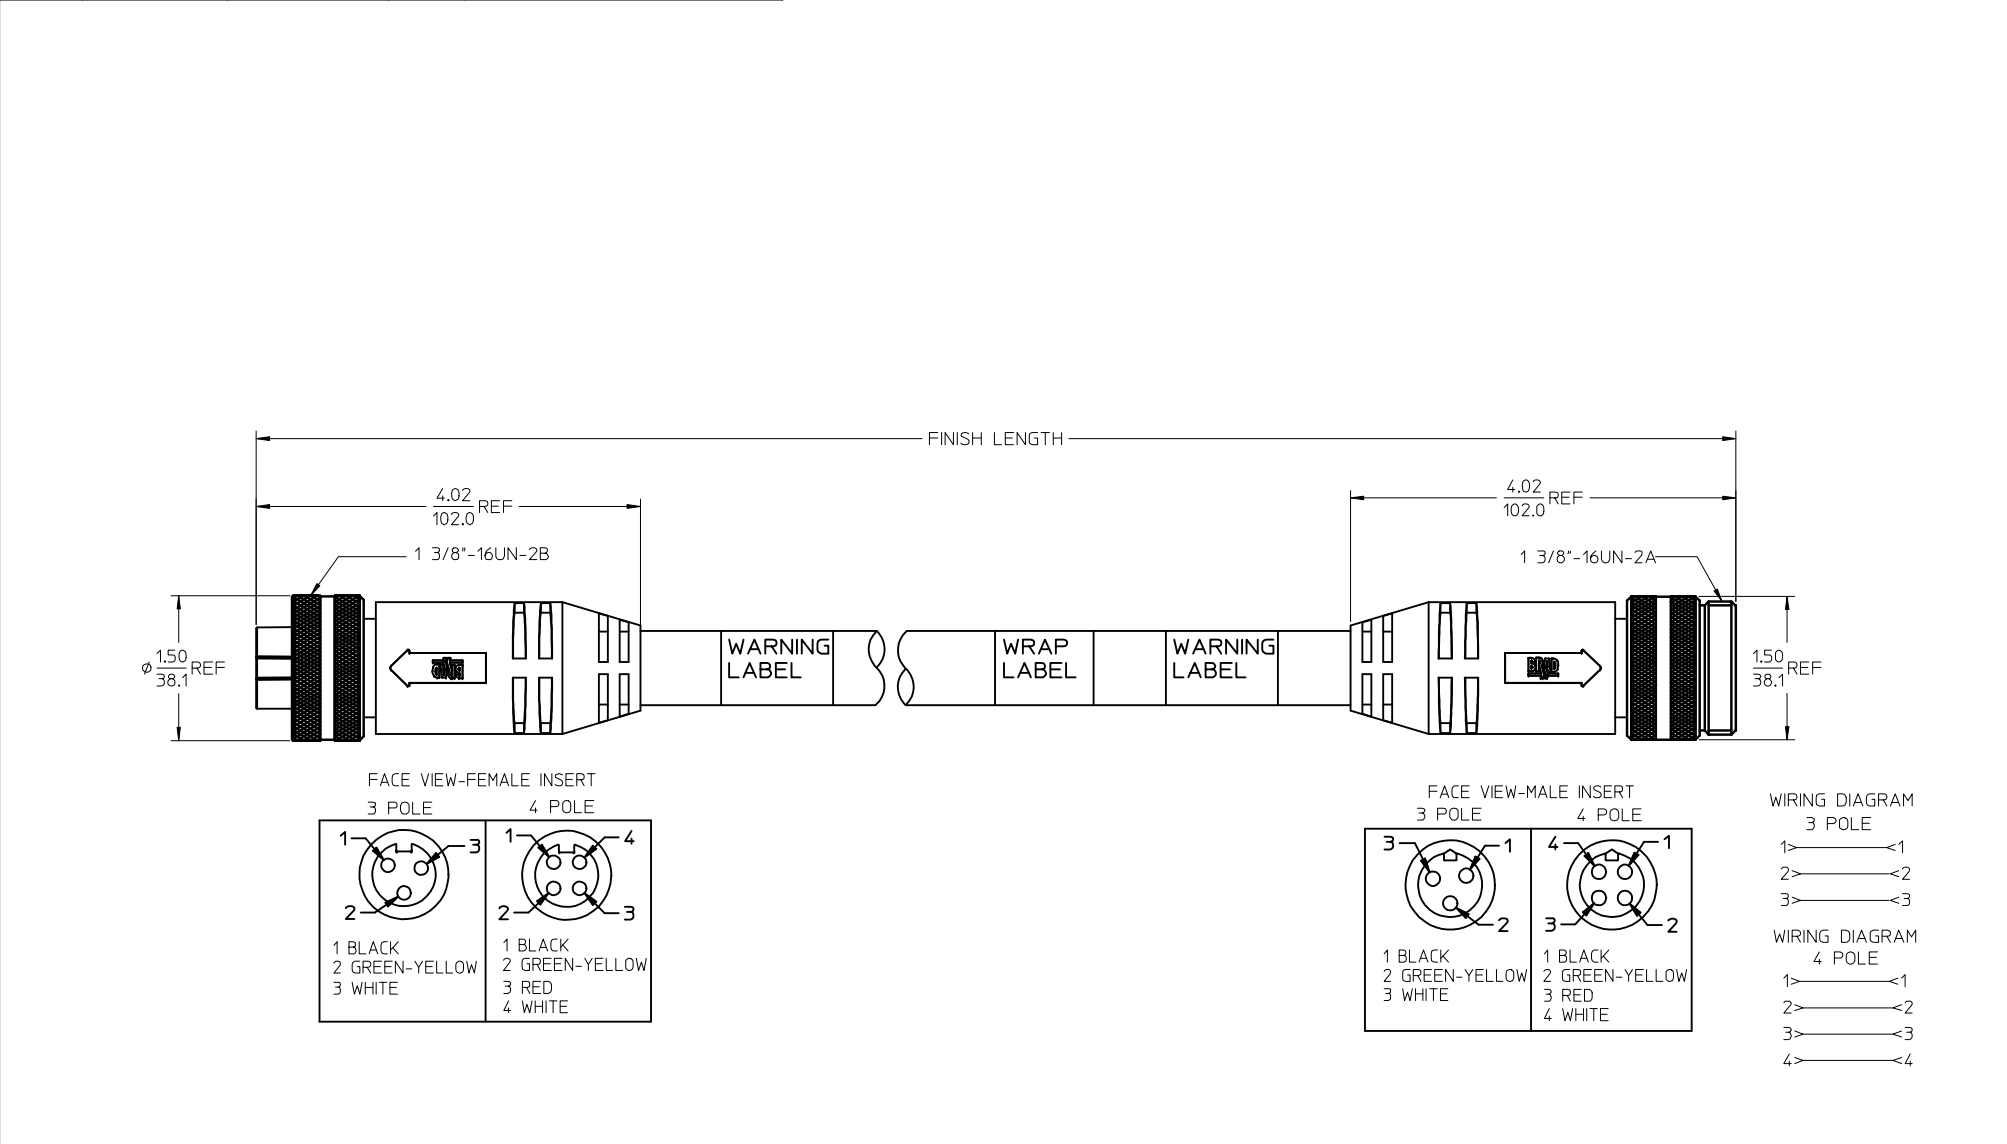

SPECs: OVERMOLD: GRAY PVC INSERT: BLACK PVC COUPLING NUT: ANODIZED ALUMINUM CABLE: #10AWG GRAY PVC DUAL RATED UL TC/OPEN WIRING & ST00W ELECTRICAL: 600V AC/DC	ADDED PART NUMBER EC NO: IPG2016-1155		DRWNGGUSTAFSON 2016/02/23 CHKD:MZJEL/MSK1 2016/03/15 APPR:BW00DMAN 2016/02/23		QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:2		DESIGN UNITS INCH		THIRD ANGLE PROJECTION	
	REV	DESCRIPTION	mm			INCH		DRAWN BY B.RUPERT		DATE 01/12/10		TITLE QUICK CHANGE FEMALE/MALE STRAIGHT 3 & 4 POLE AS PORTABLES			
			4 PLACES ± --- ± ---			3 PLACES ± --- ± .005		CHECKED BY B.WOODMAN		DATE 01/12/10					
			2 PLACES ± --- ± .010			1 PLACE ± --- ± .020		APPROVED BY JFMURPHY		DATE 2010/01/15		MOLEX INCORPORATED			
			ANGULAR ±1/2°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-130064-065					
SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													

1b_frame_C_P_AM_T Rev. E 2006/04/15	12	11	10	9	8	7	6	5	4	3	2	1
--	----	----	----	---	---	---	---	---	---	---	---	---