






1447 AS SHOWN

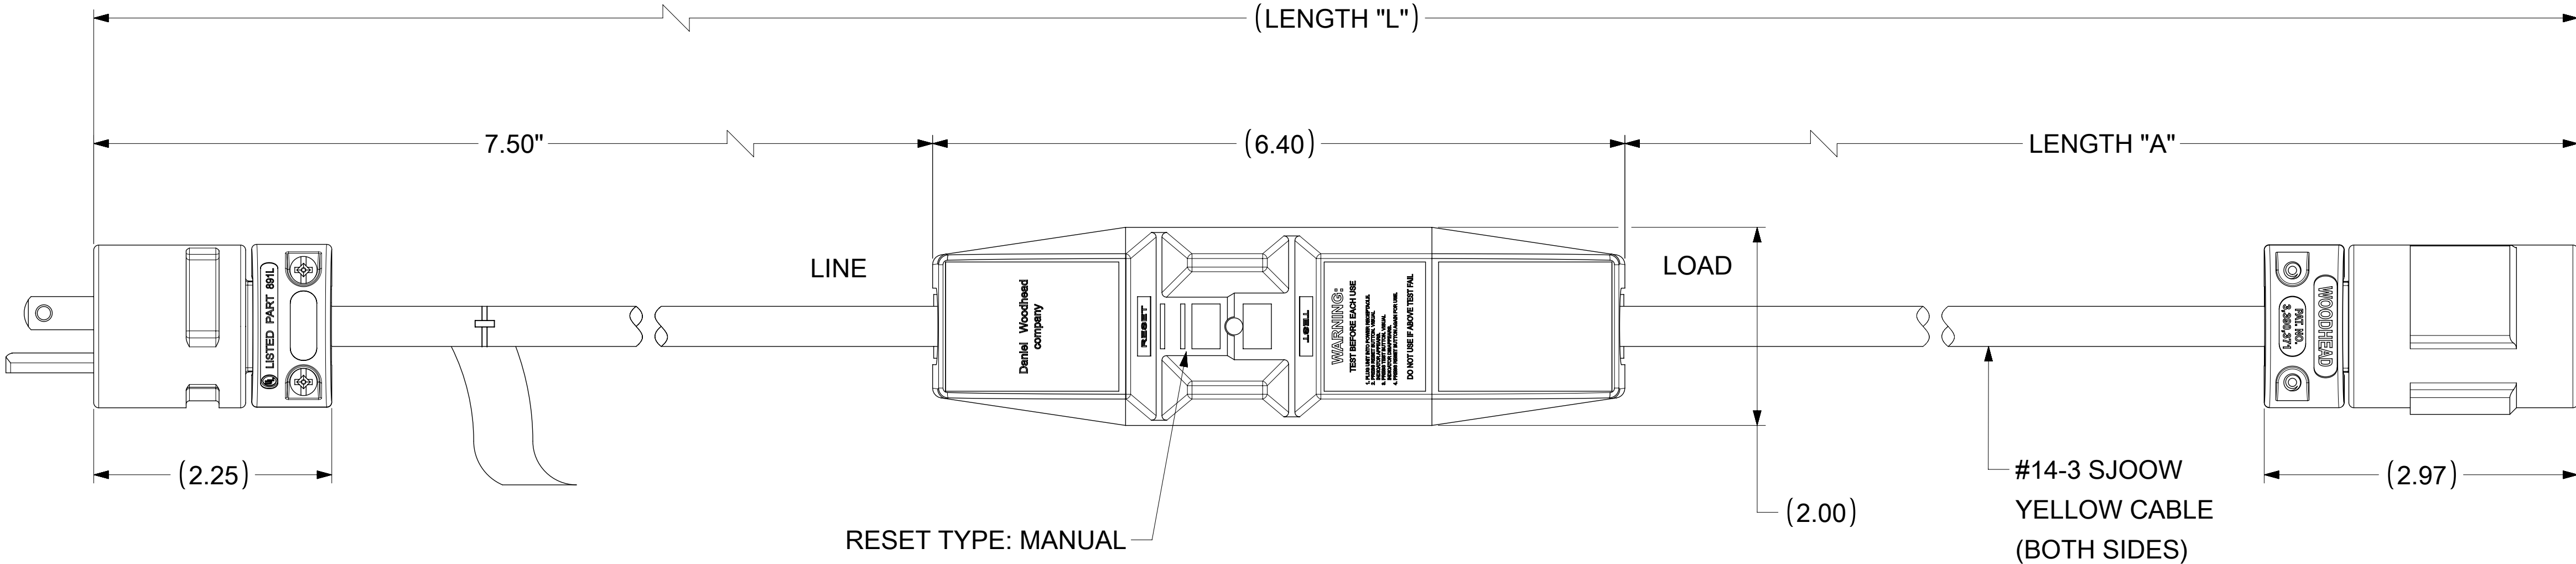

1547 AS SHOWN

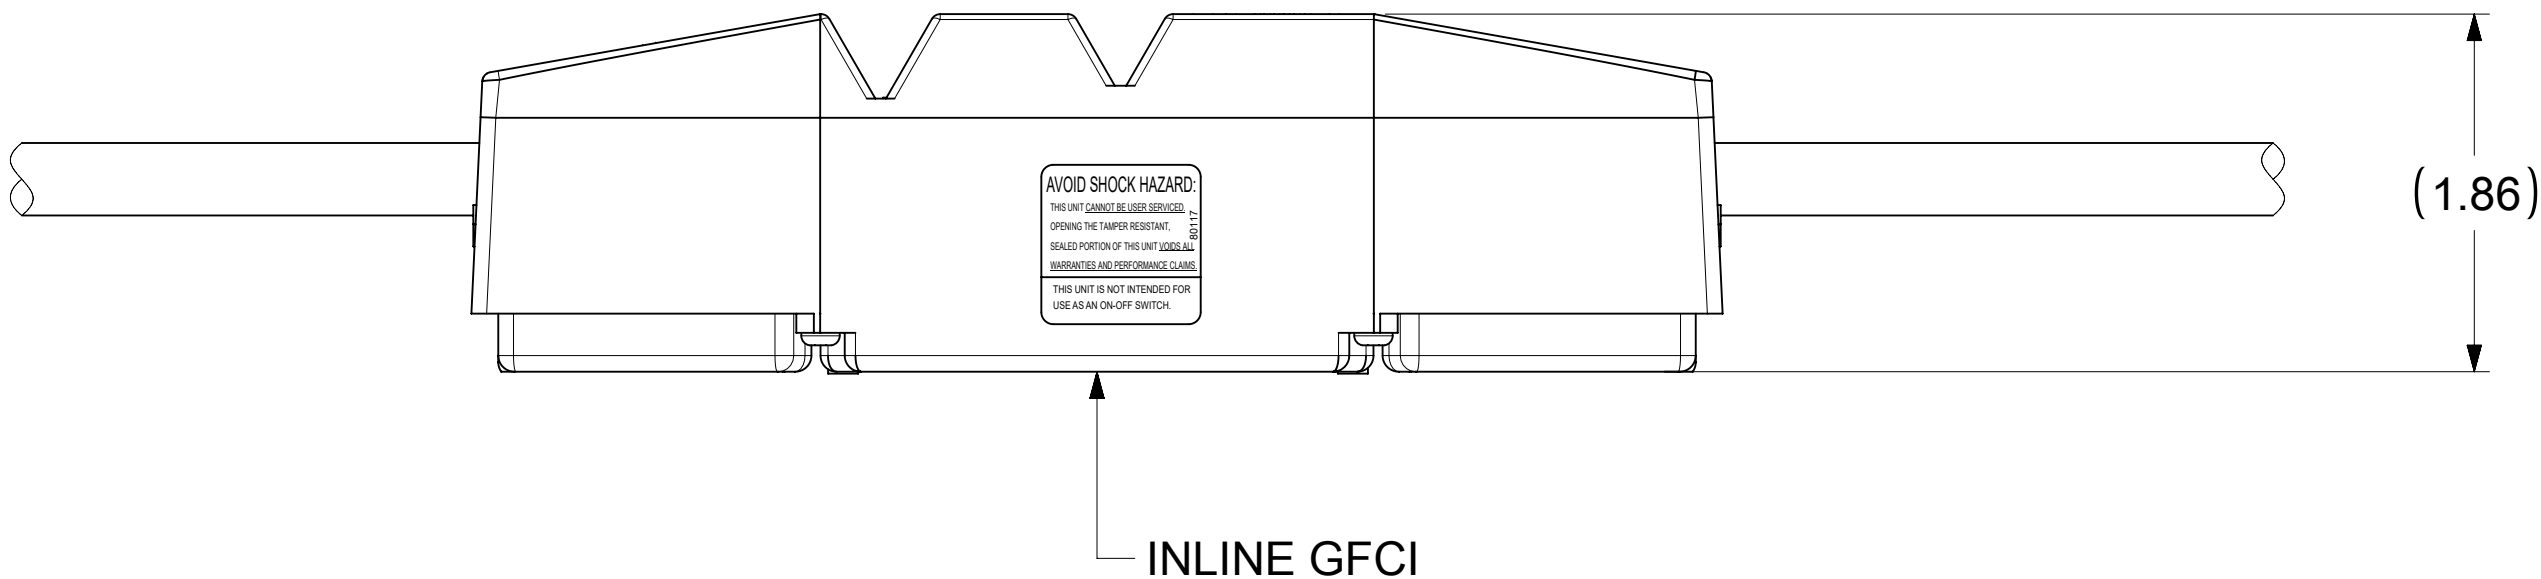

TECHNICAL

LISTED:	cULus
RATED SUPPLY VOLTAGE:	120VAC
RATED CURRENT:	15A
RESET TYPE:	MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	90A
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS

MATERIAL NO.	ENGINEERING NO.	LENGTH "A"	LENGTH "L"	PLUG	CONNECTOR
1301530042	15051-1	9.50 IN.	1 FT. 11.4 IN	1447	1547
1301530051	15051-6	4 FT. 10.5 IN.	6 FT. 0.4 IN.	1447	1547
1301530045	15051-25	23 FT. 10.5 IN.	25 FT. 0.4 IN.	1447	1547
1301530048	15051-50	48 FT. 10.5 IN.	50 FT. 0.4 IN.	1447	1547

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
FA = 0	DIMENSION UNITS	SCALE		CURRENT REV DESC: NEW SALES DRAWING CREATED				molex											
	INCH	NTS																	
	GENERAL TOLERANCES (UNLESS SPECIFIED)																		
FC = 0	ANGULAR TOL		±	°	EC NO: 693004 DRWN: PPURSUTANDEL 2021/09/23 CHK'D: DNGUYEN62 2022/01/26 APPR: HKNEELAND 2022/02/02				GFCI IN-LINE 15A WITH SAFEWAY PLUG AND CONNECTOR										
4 PLACES		±																	
3 PLACES		±																	
FP = 0	2 PLACES		±	INITIAL REVISION: DRWN: PPURSUTANDEL 2021/09/23 APPR: HKNEELAND 2022/02/02				PRODUCT CUSTOMER DRAWING											
	1 PLACE		±																
	0 PLACES		±																
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION									DRAWING	SERIES	DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
													D-SIZE	130153	1301530045		PSD	000	A

molex

GFCI IN-LINE 15A WITH SAFEWAY
PLUG AND CONNECTOR

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1301530045	PSD	000	A

DOCUMENT STATUS	P1	RELEASE DATE	2022/02/02	21:42:46
-----------------	----	--------------	------------	----------