


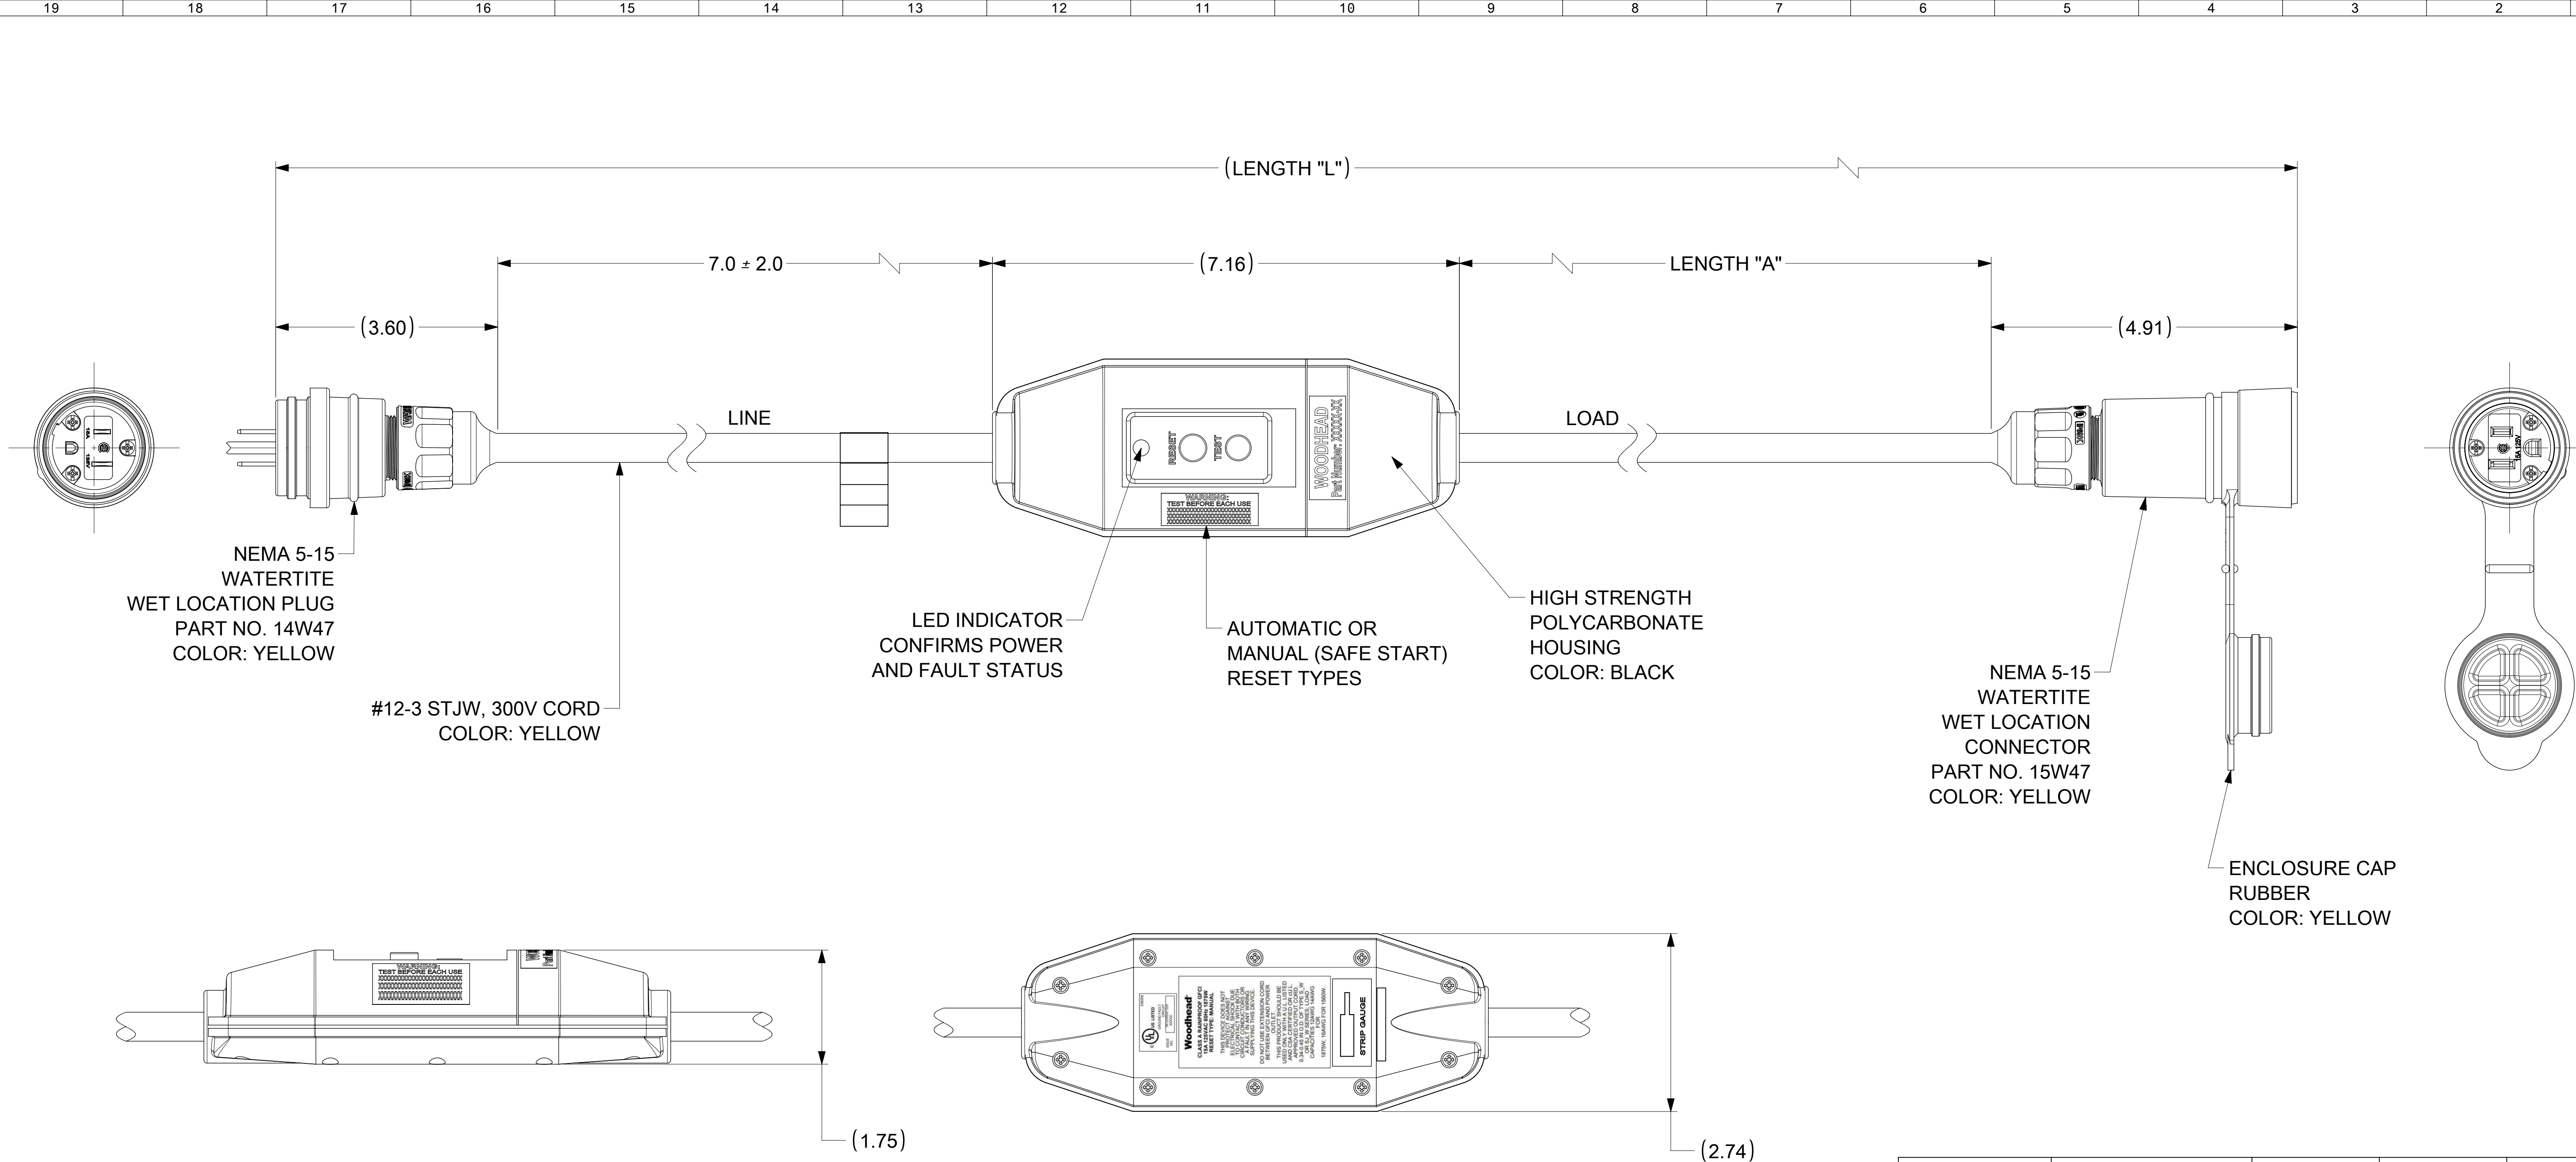

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530056	15052-1A	2 FT 8 IN	1 FT ± 1 IN	AUTO
1301530068	15052-6A	7 FT 8 IN	6 FT ± 2 IN	AUTO
1301530061	15052-25A	26 FT 8 IN	25 FT ± 2 IN	AUTO
1301530065	15052-50A	51 FT 8 IN	50 FT ± 4 IN	AUTO
1301530059	15052-1M	2 FT 8 IN	1 FT ± 1 IN	MANUAL
1301530070	15052-6M	7 FT 8 IN	6 FT ± 2 IN	MANUAL
1301530063	15052-25M	25 FT 8 IN	25 FT ± 2 IN	MANUAL
1301530066	15052-50M	50 FT 8 IN	50 FT ± 4 IN	MANUAL

TECHNICAL:

LISTED: UL AND cUL
RATED SUPPLY VOLTAGE: 120 VAC
RATED CURRENT: UP TO 15 AMPS OR CABLE RATING
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 4-6 mA
OVERLOAD CURRENT: 90 AMP 125 VAC
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS

SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	= 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATION TO ECTR/NX				molex			
		INCH		NTS									
	= 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 629866 DRWN: PPURSUTANDEL 2019/11/11 CHK'D: DNGUYEN62 2020/01/09 APPR: HKNEELAND 2020/02/05							
	= 0												
	= 0	MM		INCH		PRODUCT CUSTOMER DRAWING							
		4 PLACES ± ±		3 PLACES ± ± 0.005									
	= 0	2 PLACES ± 0.13 ± 0.01		DOCUMENT NUMBER SD-130153-016									
	= 0	1 PLACE ± 0.25 ± 0.02										0 PLACES ± ±	
	= 0	ANGULAR TOL ± 0.5 °				SHEET NUMBER 1 OF 1							
	= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											
	= 0	THIRD ANGLE PROJECTION				DRAWING D-SIZE		SERIES 130153		MATERIAL NUMBER SEE TABLE		CUSTOMER NORTH SHORE SAFETY	

DOCUMENT STATUS	P1	RELEASE DATE	2020/02/05	18:23:45
-----------------	----	--------------	------------	----------