


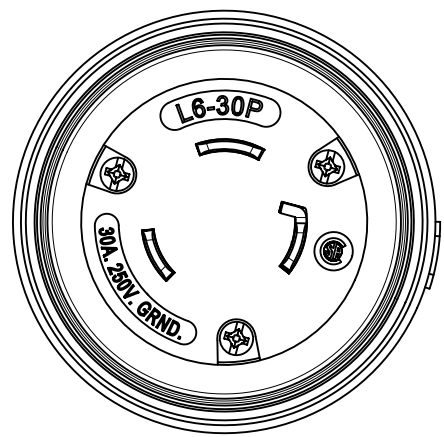
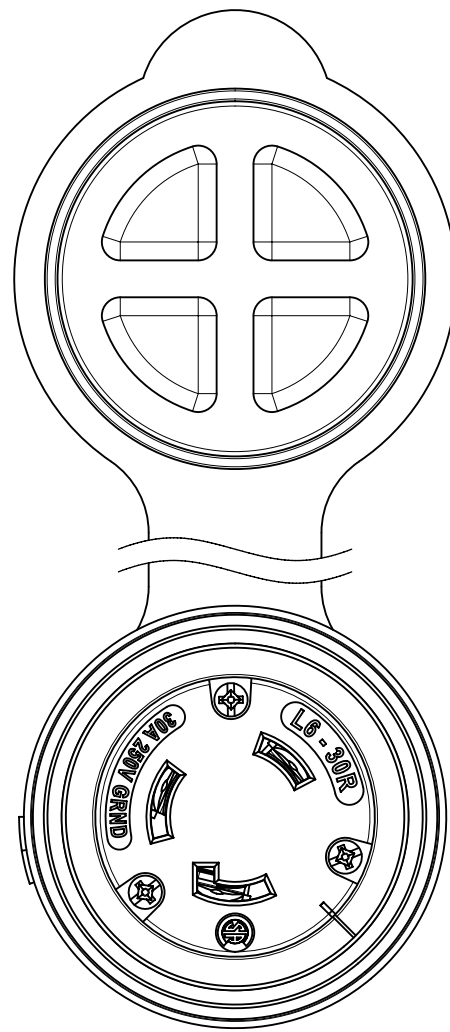


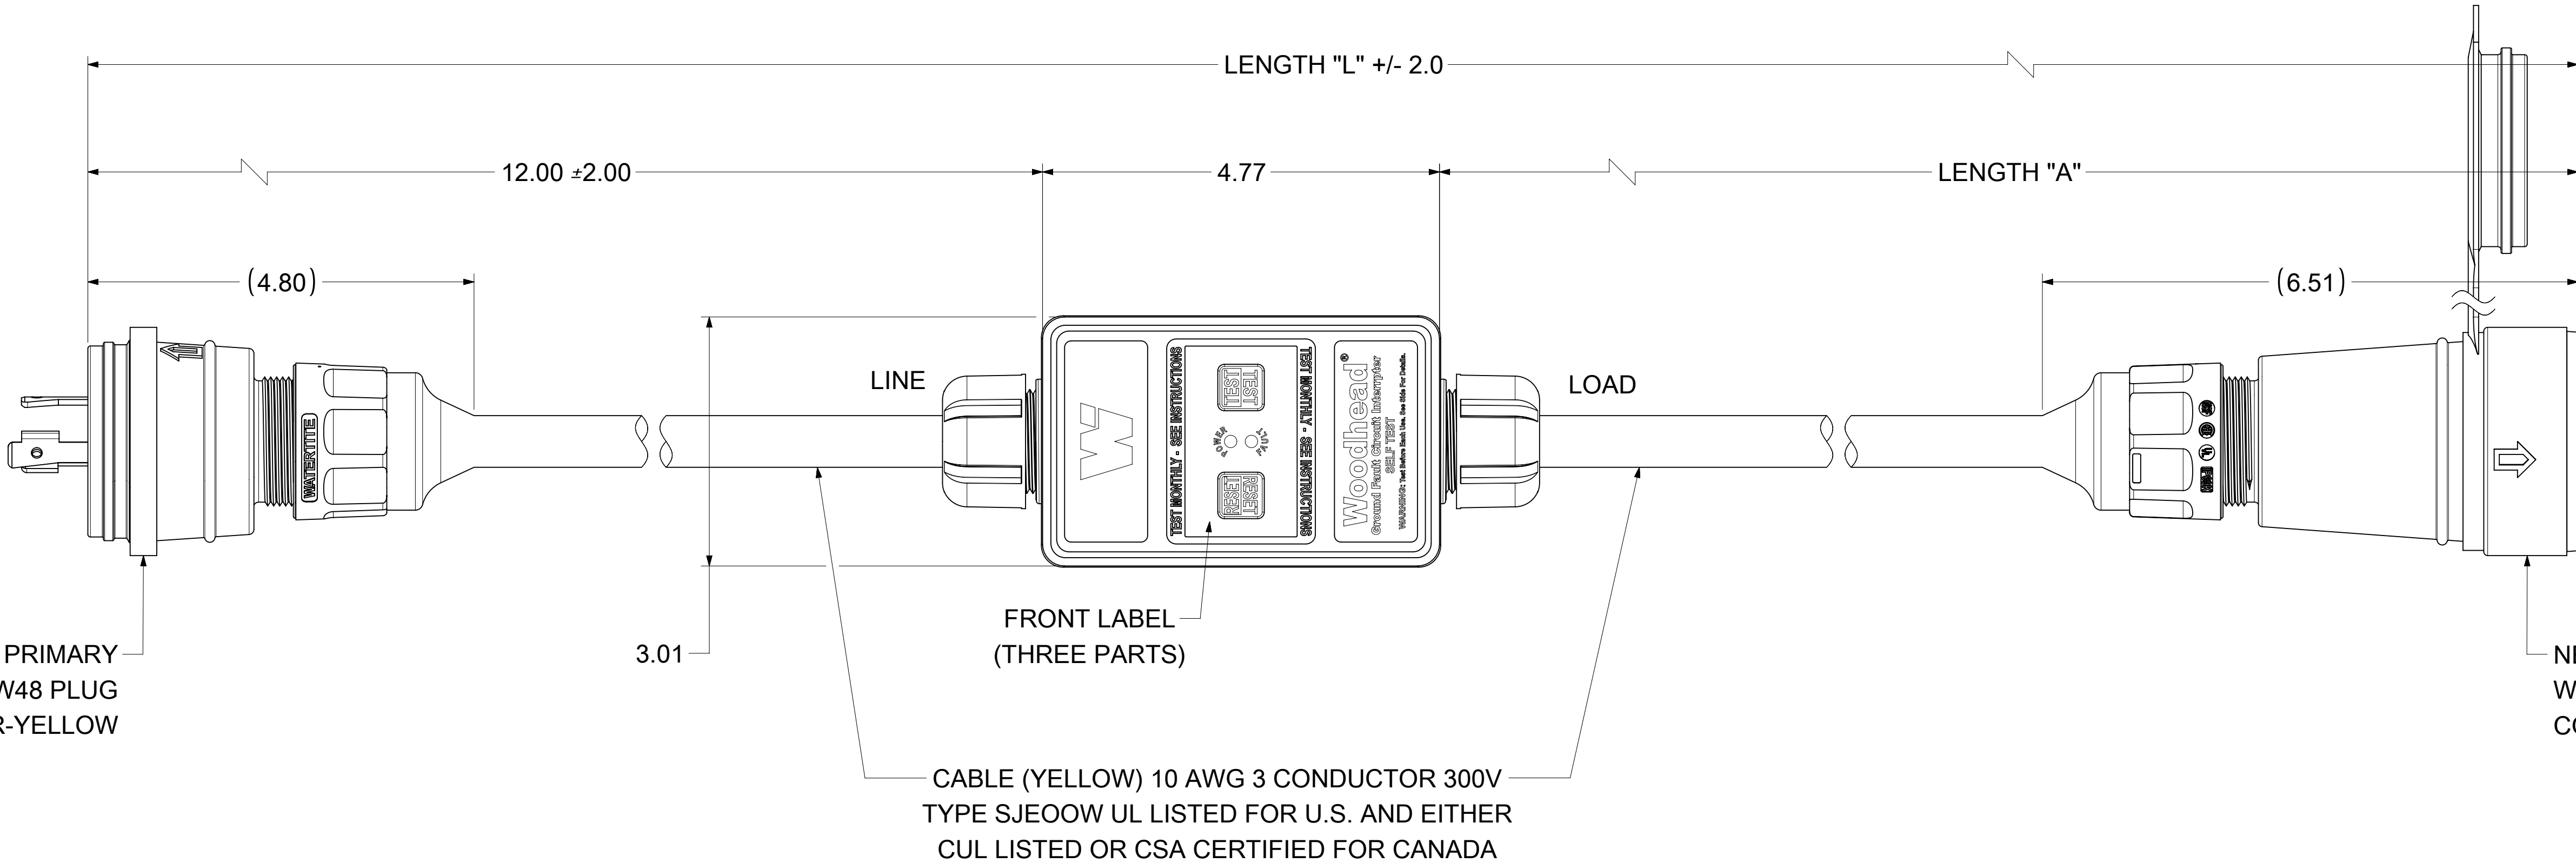

NEMA L6-30 PRIMARY
WOODHEAD #28W48 PLUG
COLOR-YELLOW

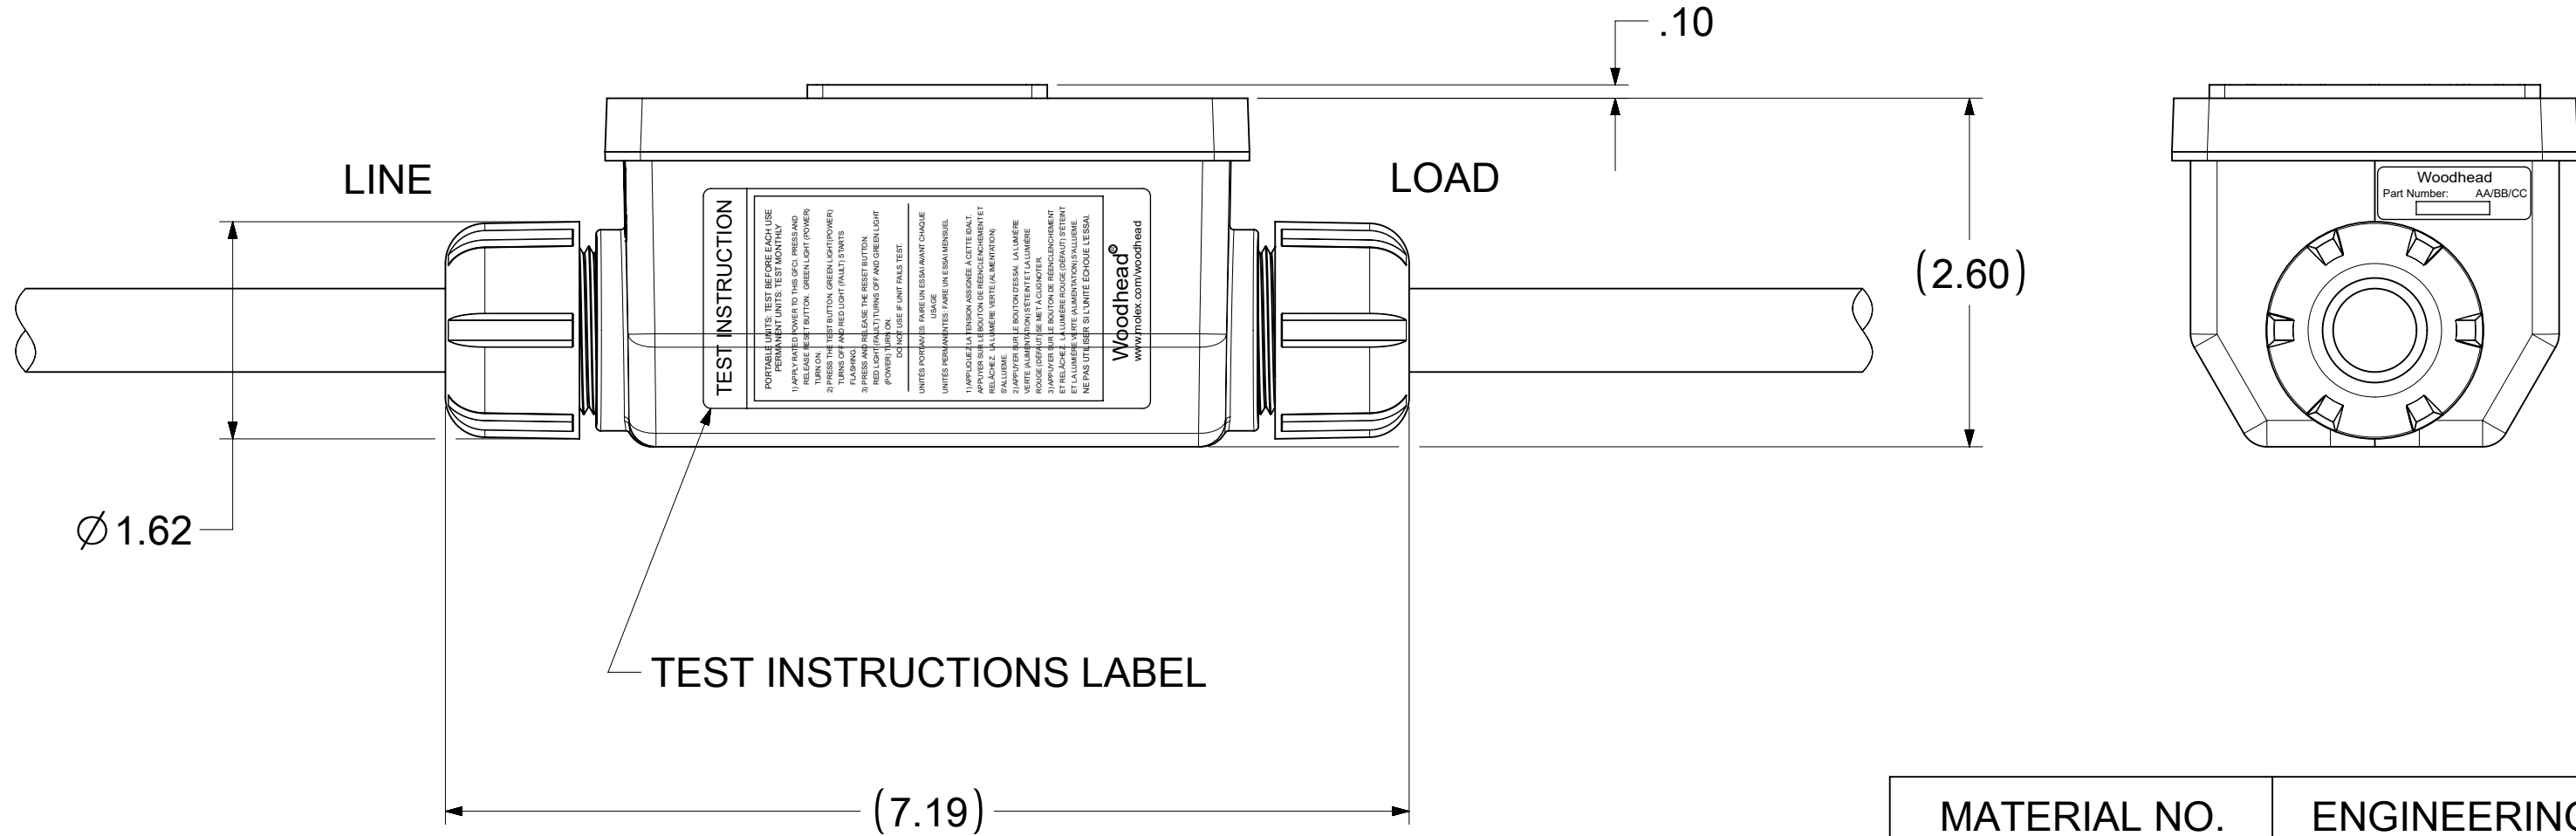

NEMA L6-30 SECONDARY
WOODHEAD #29W48 CONNECTOR
COLOR-YELLOW

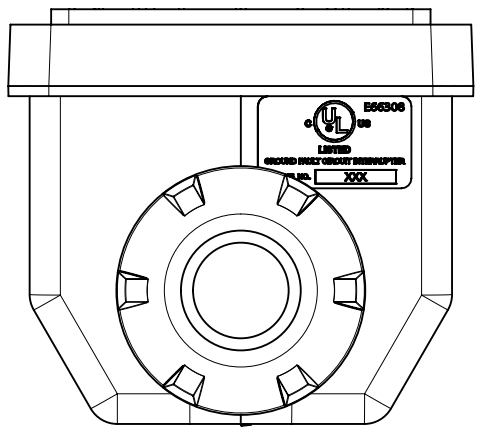

TECHNICAL

LISTED:	cULus
RATED SUPPLY VOLTAGE:	240VAC
RATED CURRENT:	UP TO 30 AMPS
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
PHASE	SINGLE PHASE
OVERLOAD CURRENT:	180 AMPS, 0.45PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	TYPE 4X, IP69K (SINGLE PHASE)

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530193	30054-1A	2 FT 9.4 IN.	1 FT	AUTO
1301530199	30054-6A	7 FT 9.4 IN.	6 FT	AUTO
1301530196	30054-25A	26 FT 9.4 IN.	25 FT	AUTO
1301530194	30054-1M	2 FT 9.4 IN.	1 FT	MANUAL
1301530200	30054-6M	7 FT 9.4 IN.	6 FT	MANUAL
1301530197	30054-25M	26 FT 9.4 IN.	25 FT	MANUAL

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
FA = 0 FC = 0 FP = 0		DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED GFCI BODY									
		INCH		NTS											
		GENERAL TOLERANCES (UNLESS SPECIFIED)													
ANGULAR TOL ± °															
DIVISIONAL SYMBOLS		4 PLACES		±		EC NO: 788654		2024/06/06							
		3 PLACES		±		DRWN: PPURSUTANDEL									
		2 PLACES		±		CHK'D: DNGUYEN62									
		1 PLACE		±		APPR: HKNEELAND		2024/06/13							
		0 PLACES		±		INITIAL REVISION:		2021/07/06							
		DRWN: PPURSUTANDEL		2021/07/06		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION			
		APPR: HKNEELAND		2021/08/17		1301530193		PSD		000		B			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						D-SIZE		130153		SEE TABLE		GENERAL MARKET		1 OF 1	

molex

30A/240V INLINE GFCI AUTO 2FT
WATERTITE NEMA

PRODUCT CUSTOMER DRAWING

DOC TYPE DOC PART REVISION

PSD 000 B

GENERAL MARKET