X2 Frequency Multiplier

50Ω Output 1000 to 2200 MHz

KC2-11+



Generic photo used for illustration purposes only

CASE STYLE: DZ885

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Input, 25°C	200mW

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

INPUT	10
OUTPUT	5
50Ω TERMINATE EXT.	3
GROUND	1,2,4,6,7,8,9

Outline Drawing

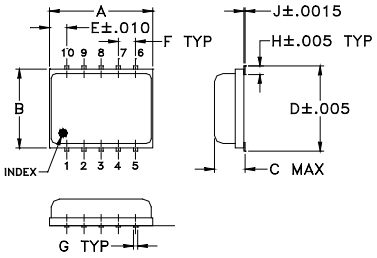

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.30	.250	.085	.266	.050	.050	.012
7.62	6.35	2.16	6.76	1.27	1.27	0.30
H	J	K	L	M		wt
.029	.004	.085	.296	.030		grams
0.74	0.10	2.16	7.52	0.76		0.25

Demo Board MCL P/N: TB-144
Suggested PCB Layout (PL-045)



NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low conversion loss, 10.5 dB typ.
- LTCC design
- low profile, 0.085"
- low cost

Applications

- synthesizers
- local oscillators

Electrical Specifications


MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)		*HARMONIC OUTPUT (dBc)					
	F1	F2					F1		F3		F4	
	Input	Output	Min.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.
2	**500-1100**	**1000-2200**	**5**	**10**	**10.5**	**13.5**	**27**	**18**	**34**	**20**	**21**	**12**
	550-750	1100-1500	5	10	10.0	13.5	30	21	34	21	21	12

* Harmonics of input frequency below the power level of F2


Typical Performance Data

Input Frequency (MHz)	INPUT RF= 5 dBm Conversion Loss (dB)	Harmonic Output Below F2 (-dBc)			INPUT RF= 10 dBm Conversion Loss (dB)	Harmonic Output Below F2 (-dBc)		
	F2	F1	F3	F4	F2	F1	F3	F4
500.00	11.02	32.07	30.29	18.52	10.39	33.22	29.34	16.59
550.00	10.46	34.11	33.67	22.15	9.65	33.10	30.50	18.18
600.00	10.48	35.71	36.35	27.92	9.39	32.02	31.53	16.77
650.00	10.14	37.99	43.65	25.22	9.43	31.11	33.01	16.33
700.00	10.20	42.23	46.39	22.94	9.62	31.08	35.78	18.30
750.00	9.91	37.54	48.95	23.42	9.91	30.15	33.90	19.01
800.00	9.83	29.48	39.88	23.38	10.35	28.56	31.75	17.73
850.00	9.96	27.93	34.61	21.93	11.04	27.29	27.33	18.07
900.00	10.27	27.40	35.02	21.75	11.29	25.98	26.91	17.41
950.00	10.02	26.99	41.50	25.97	10.69	24.88	29.84	25.84
1000.00	10.21	27.27	41.54	34.18	10.38	26.16	32.38	34.74
1050.00	11.02	27.61	44.32	43.17	11.15	27.23	35.50	52.58
1100.00	12.37	29.48	35.70	27.14	12.06	29.84	34.52	31.25


KC2-11+
CONVERSION LOSS

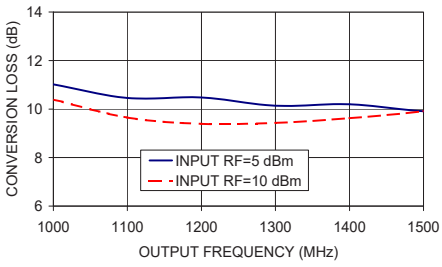


KC2-11+
HARMONIC OUTPUT F1

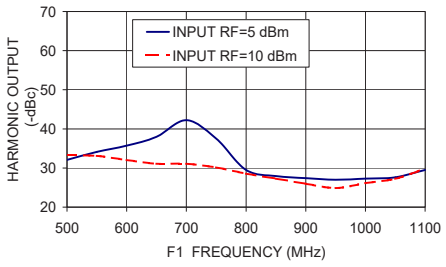

KC2-11+
HARMONIC OUTPUT F3

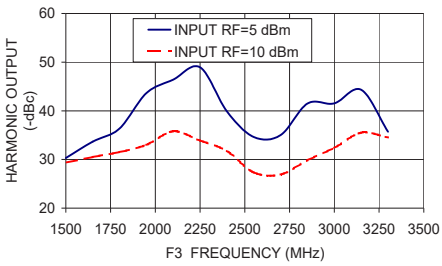

KC2-11+
HARMONIC OUTPUT F4

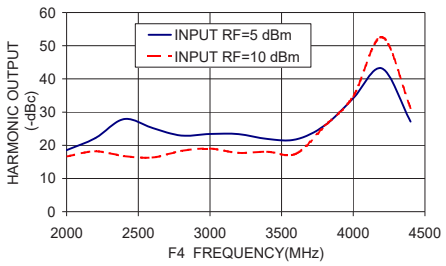

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

REV. C
M151107
KC2-11+
ED-11593/2
DJ/RS/CP/AM
200512