19-1499; Rev 3; 12/08

60mA, SOT23 Inverting Charge Pump with Shutdown

General Description

The MAX1697 ultra-small, monolithic, CMOS charge-pump voltage inverter accepts an input voltage ranging from +1.25V to +5.5V. This device features an ultra-low 12Ω output resistance, permitting loads of up to 60mA with maximum efficiency. The MAX1697 is available with operating frequencies of 12kHz, 35kHz, 125kHz, or 250kHz, allowing optimization of supply current or external component size. Its small external components and micropower shutdown mode make this device ideal for both battery-powered and board-level voltage conversion applications.

Oscillator control circuitry and four power MOSFET switches are included on-chip. Applications include generating a negative supply from a +5V or +3.3V logic supply to power analog circuitry. All versions come in a 6-pin SOT23 package and deliver 60mA.

For applications with lower current requirements, the MAX1719/MAX1720/MAX1721 are pin-compatible SOT23 charge pumps that supply up to 25mA.

Applications

Negative Supply from +5V or +3.3V Logic Supplies

Small LCD Panels

GaAsFET Bias Supplies

Handy-Terminals, PDAs

Battery-Operated Equipment

Features

- **60mA Output Current**
- **Low 12Ω Output Resistance**
- **150µA Supply Current (MAX1697R)**
- **Requires Only Two 1µF Capacitors (MAX1697U)**
- **Start-Up Current Limited**
- **+1.25V to +5.5V Input Voltage Range**
- **Slew-Rate Limited to Reduce EMI**

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX1697_EUT-T	-40°C to +85°C	6 SOT23

Note 1: *The MAX1697 requires special solder temperature profile described in the Absolute Maximum Ratings section.*


Note 2: *The MAX1697 is available with four different operating frequencies. Choose the desired frequency from the table below and insert the suffix in the blank above to complete the part number.*

PART NO. SUFFIX	FREQUENCY (kHz)	TOP MARK		
		-T	+T	#T
R	12	AABV	AABV	ACBT
S	35	AABW	AABW	ACCK
T	125	AABX	AABX	ACCL
U	250	AABY	AABY	ACCM


Note 3: *MAX1697 is available in different package material. Add the following suffix to the part number when ordering:*

-T = Denotes a package containing lead(Pb).
+T = Denotes a lead(Pb)-free/RoHS-compliant package.
#T = Denotes an RoHS-compliant device that may include lead(Pb) that is exempt under the RoHS requirements.

Typical Operating Circuit

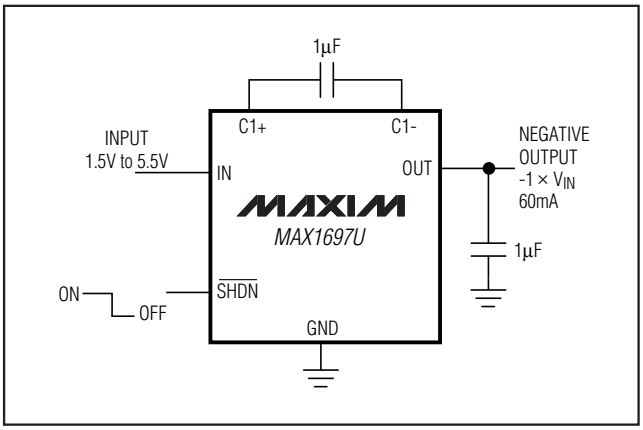

Pin Configuration

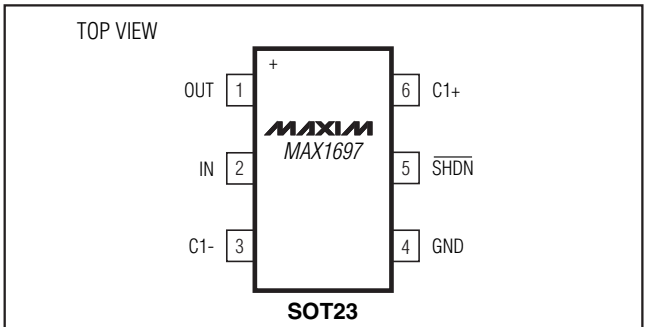

SOT23

Note 4: *Leaded and lead-free top marks are identical. Per Maxim guideline, the pin 1 indicator for leaded package is a '•' and the lead-free package is a '+'.*

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

60mA, SOT23 Inverting Charge Pump with Shutdown

ABSOLUTE MAXIMUM RATINGS

IN to GND .....-0.3V to +6V
C1+, $\overline{SHDN}$ to GND .....-0.3V to (V_{IN} + 0.3V)
C1- to GND.....(V_{OUT} - 0.3V) to + 0.3V
OUT to GND .....+0.3V to -6V
OUT Output Current.....90mA
OUT Short-Circuit to GND .....Indefinite

Continuous Power Dissipation (T_A = +70°C)
6-Pin SOT23 (derate 14mW/°C above +70°C) (Note 5)...1.1W
Operating Temperature Range .....-40°C to +85°C
Junction Temperature.....+150°C
Storage Temperature Range .....-65°C to +150°C
Lead Temperature .....(Note 6)

Note 5: Thermal properties are specified with product mounted on the PC board with one square-inch of copper area and still air.
Note 6: This device is constructed using a unique set of packaging techniques that impose a limit on the thermal profile the device can be exposed to during board level solder attach and rework. Maxim recommends the use of the solder profiles recommended in the industry standard specification, JEDEC 020A, paragraph 7.6, Table 3 for IR/VPR and Convection reflow processes. Preheating, per this standard, is required. Hand or wave soldering is not recommended.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(Circuit of Figure 1, capacitors from Table 2, V_{IN} = +5V, $\overline{SHDN}$ = IN, **T_A = 0°C to +85°C**, unless otherwise noted. Typical values are at T_A = +25°C.)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage Range	MAX1697R/S, R_L = 5kΩ	T_A = +25°C	1.25		5.5	V
		T_A = 0°C to +85°C	1.5		5.5	
	MAX1697T/U, R_L = 5kΩ	T_A = +25°C	1.4		5.5	
		T_A = 0°C to +85°C	1.5		5.5	
Quiescent Supply Current (Note 9)	T_A = +25°C	MAX1697R		150	300	µA
		MAX1697S		350	650	
		MAX1697T		950	1700	
		MAX1697U		1800	3400	
Shutdown Supply Current	$\overline{SHDN}$ = GND	T_A = +25°C		0.002	1	µA
		T_A = +85°C		0.03		
Short-Circuit Current	Output shorted to ground, T_A = +25°C			170		mA
Oscillator Frequency	T_A = +25°C	MAX1697R	7	12	17	kHz
		MAX1697S	20	35	50	
		MAX1697T	70	125	180	
		MAX1697U	140	250	360	
Voltage Conversion Efficiency	I_{OUT} = 0, T_A = +25°C		99	99.9		%
Output Resistance (Note 7)	I_{OUT} = 60mA	T_A = +25°C		12	25	Ω
		T_A = 0°C to +85°C			33	
OUT to GND Shutdown Resistance	$\overline{SHDN}$ = GND, OUT is internally pulled to GND in shutdown			3	8	Ω
$\overline{SHDN}$ Input Logic High	2.5V ≤ V_{IN} ≤ 5.5V		2.0			V
	$V_{IN(MIN)}$ ≤ V_{IN} ≤ 2.5V		V_{IN} - 0.2			
$\overline{SHDN}$ Input Logic Low	2.5V ≤ V_{IN} ≤ 5.5V				0.6	V
	$V_{IN(MIN)}$ ≤ V_{IN} ≤ 2.5V				0.2	
$\overline{SHDN}$ Bias Current	$\overline{SHDN}$ = GND or IN	T_A = +25°C	-100	0.05	+100	nA
		T_A = +85°C		10		

ELECTRICAL CHARACTERISTICS (continued)

(Circuit of Figure 1, capacitors from Table 2, V_{IN} = +5V, $\overline{SHDN}$ = IN, **T_A = 0°C to +85°C**, unless otherwise noted. Typical values are at T_A = +25°C.)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Wake-Up Time from Shutdown	I_{OUT} = 15mA	MAX1697R		1200		µs
		MAX1697S		600		
		MAX1697T		100		
		MAX1697U		70		
THERMAL SHUTDOWN						
Trip Temperature	Temperature increasing			150		°C
Hysteresis				15		°C

ELECTRICAL CHARACTERISTICS

(Circuit of Figure 1, capacitors from Table 2, V_{IN} = +5V, $\overline{SHDN}$ = IN, **T_A = -40°C to +85°C**, unless otherwise noted.) (Note 8)

PARAMETER	CONDITIONS		MIN	MAX	UNITS
Supply Voltage Range	R_L = 5kΩ	MAX1697R/S	1.5	5.5	V
		MAX1697T/U	1.6	5.5	
Output Current	Continuous, long-term			60	mA_{RMS}
Quiescent Current (Note 9)	MAX1697R			350	µA
	MAX1697S			750	
	MAX1697T			1800	
	MAX1697U			3600	
Oscillator Frequency	MAX1697R		6	21	kHz
	MAX1697S		16	60	
	MAX1697T		60	200	
	MAX1697U		120	400	
Output Resistance (Note 7)	I_{OUT} = 60mA			33	Ω
OUT to GND Shutdown Resistance	$\overline{SHDN}$ = GND, OUT is internally pulled to GND in shutdown			8	Ω
$\overline{SHDN}$ Input Logic High	2.5V ≤ V_{IN} ≤ 5.5V		2.1		V
	$V_{IN(MIN)}$ ≤ V_{IN} ≤ 2.5V		V_{IN} - 0.2		
$\overline{SHDN}$ Input Logic Low	2.5V ≤ V_{IN} ≤ 5.5V			0.6	V
	$V_{IN(MIN)}$ ≤ V_{IN} ≤ 2.5V			0.2	

Note 7: Output resistance is guaranteed with capacitor ESR of 0.3Ω or less.

Note 8: All specifications from -40°C to +85°C are guaranteed by design, not production tested.


Note 9: The MAX1697 may draw high supply current during startup, up to the minimum operating supply voltage. To guarantee proper startup, the input supply must be capable of delivering 90mA more than the maximum load current.

60mA, SOT23 Inverting Charge Pump with Shutdown


Typical Operating Characteristics

(Circuit of Figure 1, capacitors from Table 2, V_{IN} = +5V, $\overline{SHDN}$ = IN, T_A = +25°C, unless otherwise noted.)


MAX1697R OUTPUT VOLTAGE vs. OUTPUT CURRENT

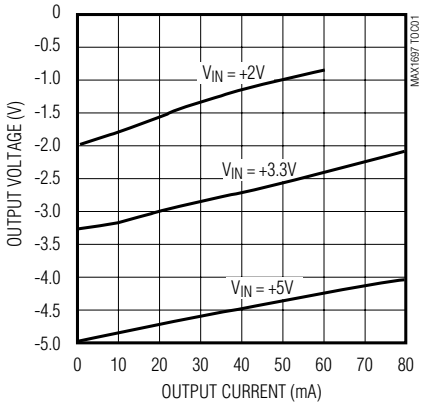


MAX1697S OUTPUT VOLTAGE vs. OUTPUT CURRENT

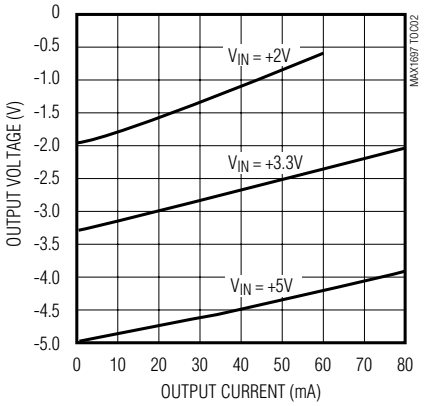


MAX1697T OUTPUT VOLTAGE vs. OUTPUT CURRENT

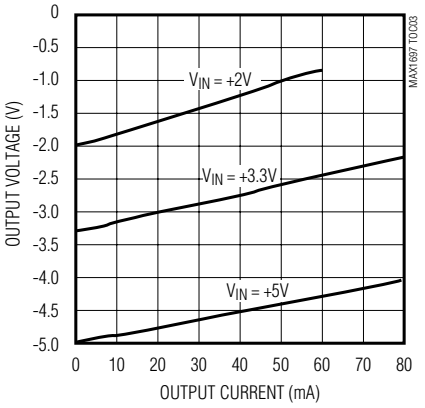


MAX1697U OUTPUT VOLTAGE vs. OUTPUT CURRENT

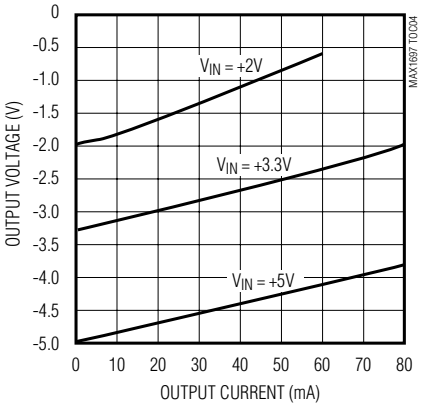


MAX1697R EFFICIENCY vs. OUTPUT CURRENT

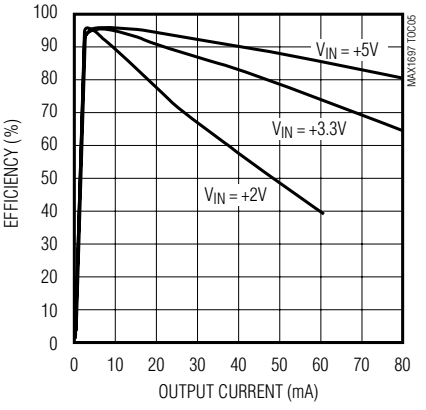


MAX1697S EFFICIENCY vs. OUTPUT CURRENT

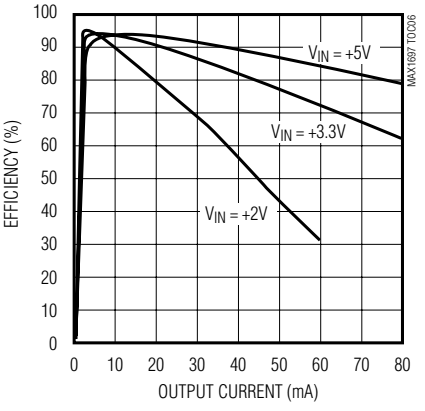


MAX1697T EFFICIENCY vs. OUTPUT CURRENT

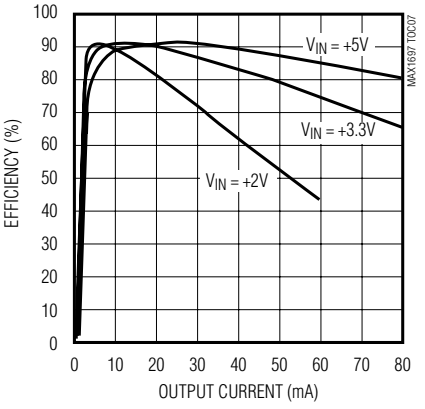

MAX1697U EFFICIENCY vs. OUTPUT CURRENT

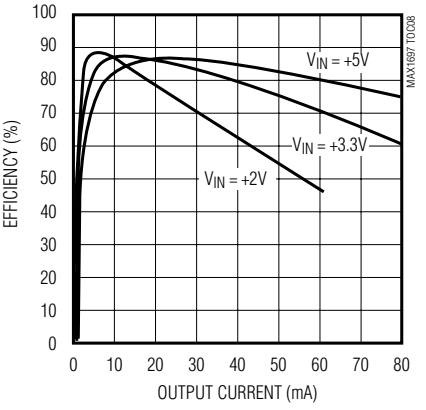


MAX1697R/S/T/U OUTPUT IMPEDANCE vs. INPUT VOLTAGE

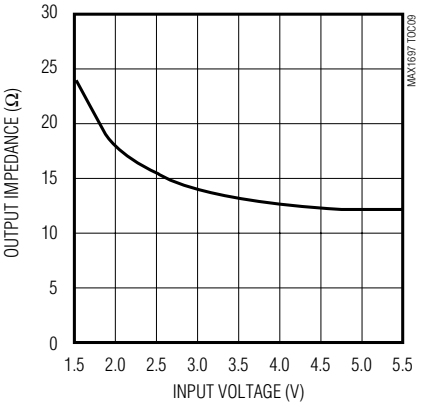


Typical Operating Characteristics (continued)

(Circuit of Figure 1, capacitors from Table 2, V_{IN} = +5V, $\overline{SHDN}$ = IN, T_A = +25°C, unless otherwise noted.)


SUPPLY CURRENT vs. INPUT VOLTAGE

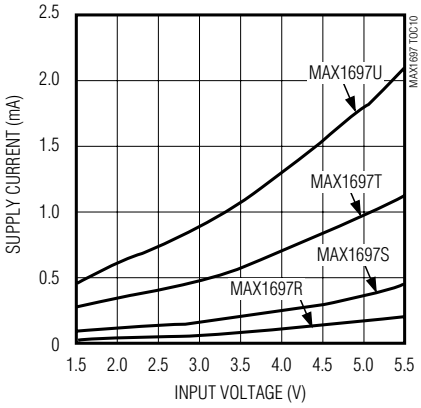


MAX1697R/S/T/U SHUTDOWN SUPPLY CURRENT vs. TEMPERATURE

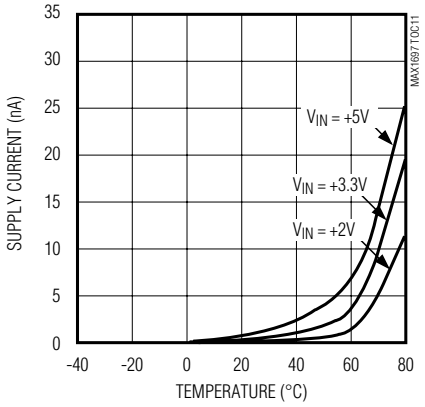


MAX1697R OUTPUT RESISTANCE vs. TEMPERATURE

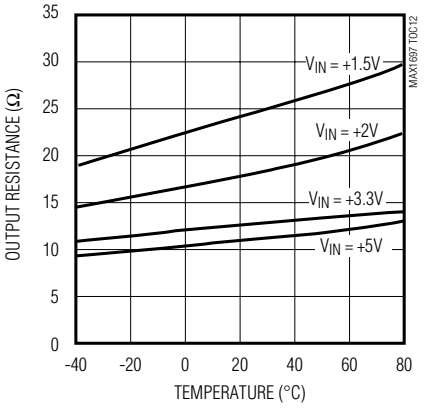


MAX1697S OUTPUT RESISTANCE vs. TEMPERATURE

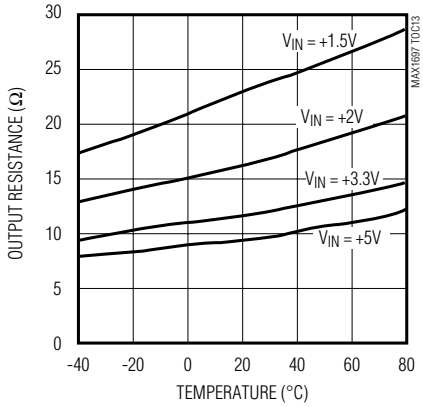


MAX1697T OUTPUT RESISTANCE vs. TEMPERATURE

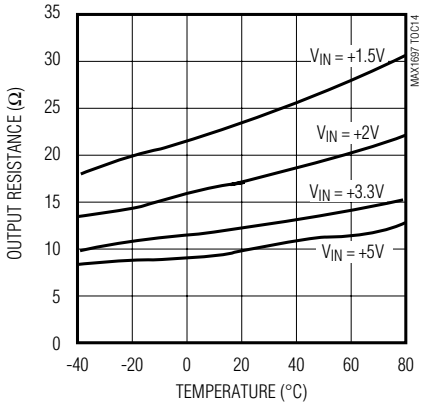


MAX1697U OUTPUT RESISTANCE vs. TEMPERATURE

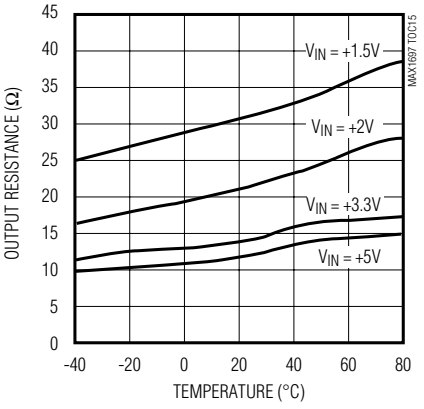

PUMP FREQUENCY vs. TEMPERATURE

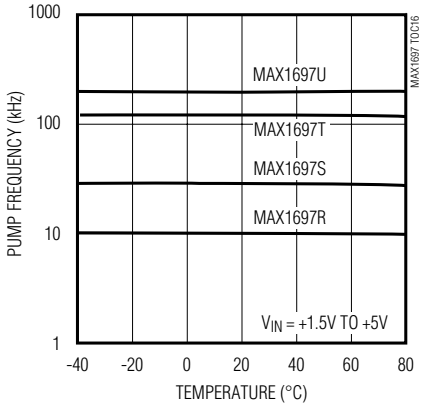


MAX1697R/S OUTPUT NOISE AND RIPPLE

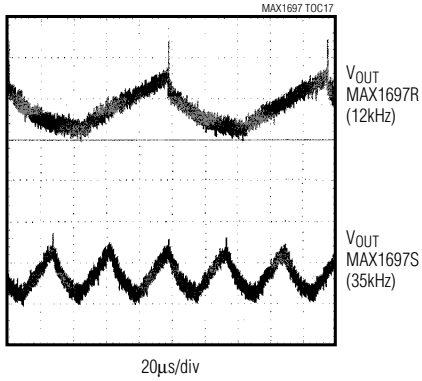

VIN = +3.3V, I_{OUT} = 5mA,
10mV/div, AC-COUPLED

MAX1697T/U OUTPUT NOISE AND RIPPLE

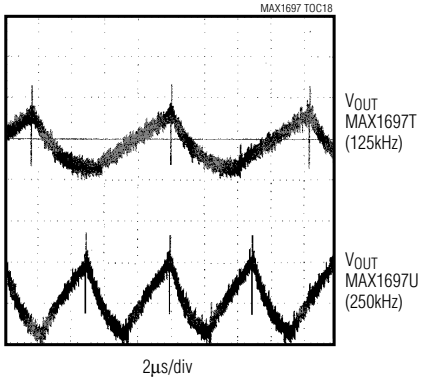


VIN = +3.3V, I_{OUT} = 5mA,
10mV/div, AC-COUPLED

60mA, SOT23 Inverting Charge Pump with Shutdown


Typical Operating Characteristics (continued)

(Circuit of Figure 1, capacitors from Table 2, V_{IN} = +5V, $\overline{SHDN}$ = IN, T_A = +25°C, unless otherwise noted.)


START-UP FROM SHUTDOWN

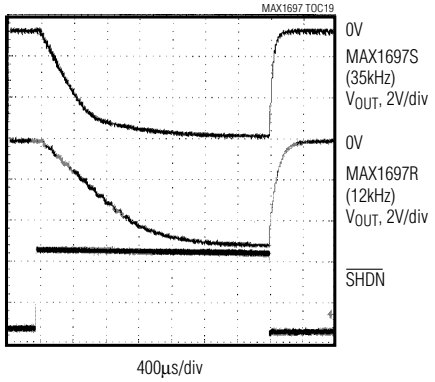


START-UP FROM SHUTDOWN

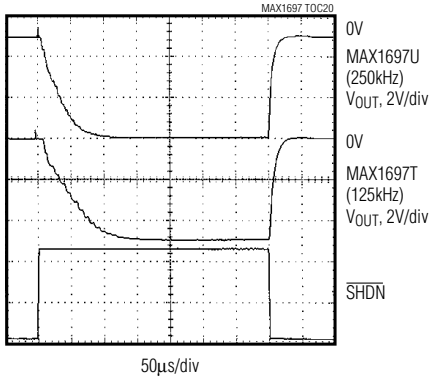


MAX1697R OUTPUT CURRENT vs. CAPACITANCE

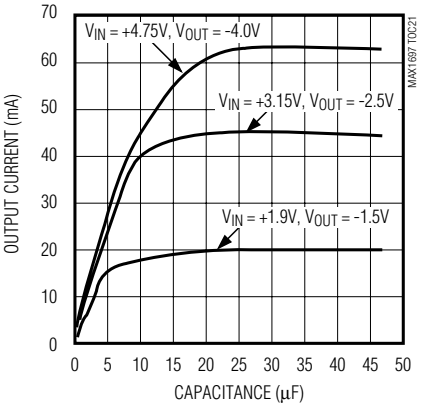


MAX1697S OUTPUT CURRENT vs. CAPACITANCE

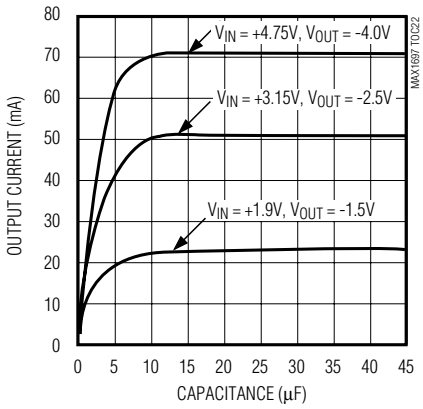


MAX1697T OUTPUT CURRENT vs. CAPACITANCE

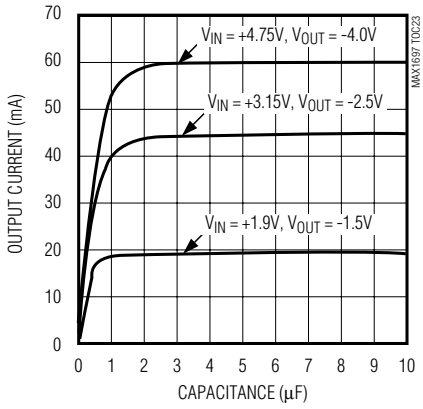


MAX1697U OUTPUT CURRENT vs. CAPACITANCE

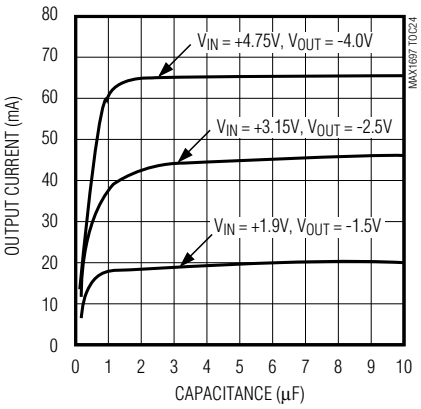

MAX1697R OUTPUT RIPPLE vs. CAPACITANCE

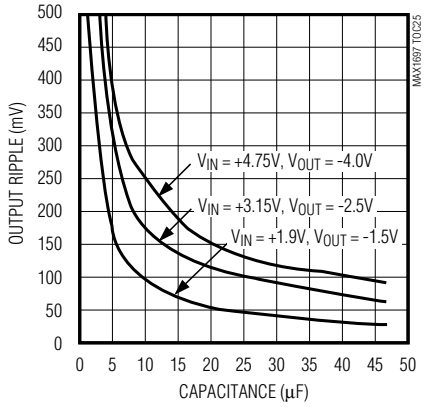



MAX1697S OUTPUT RIPPLE vs. CAPACITANCE

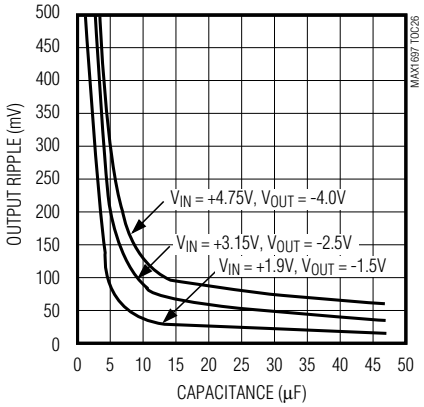

Typical Operating Characteristics (continued)

(Circuit of Figure 1, capacitors from Table 2, V_{IN} = +5V, $\overline{SHDN}$ = IN, T_A = +25°C, unless otherwise noted.)

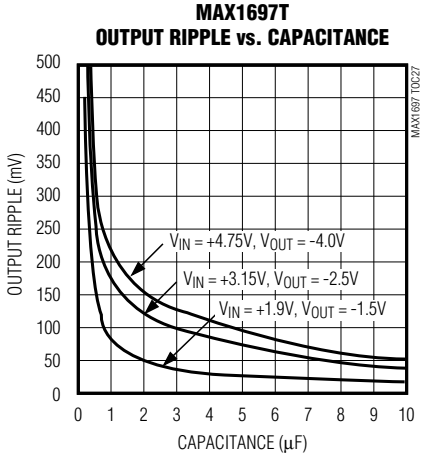

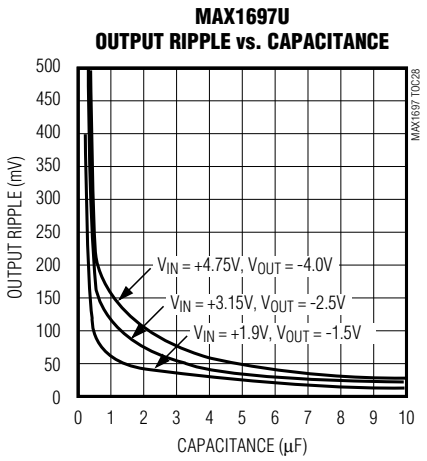

Pin Description

PIN	NAME	FUNCTION
1	OUT	Inverting Charge-Pump Output
2	IN	Power-Supply Voltage Input. Input range is 1.5V to 5.5V.
3	C1-	Negative Terminal of the Flying Capacitor
4	GND	Ground
5	$\overline{SHDN}$	Shutdown Input. Drive this pin high for normal operation; drive it low for shutdown mode. OUT is actively pulled to ground during shutdown.
6	C1+	Positive Terminal of the Flying Capacitor

Detailed Description

The MAX1697 capacitive charge pumps invert the voltage applied to their input. For highest performance, use low equivalent series resistance (ESR) capacitors (e.g., ceramic).

During the first half-cycle, switches S2 and S4 open, switches S1 and S3 close, and capacitor C1 charges to the voltage at IN (Figure 2). During the second half-cycle, S1 and S3 open, S2 and S4 close, and C1 is level shifted downward by V_{IN} volts. This connects C1 in parallel with the reservoir capacitor C2. If the voltage across C2 is smaller than the voltage across C1, charge flows from C1 to C2 until the voltage across C2 reaches $-V_{IN}$. The actual voltage at the output is more positive than $-V_{IN}$, since switches S1–S4 have resistance and the load drains charge from C2.

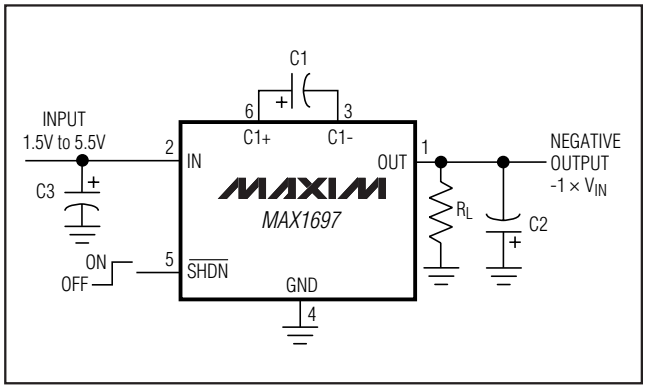


Figure 1. Typical Application Circuit

Efficiency Considerations

The efficiency of the MAX1697 is dominated by its quiescent supply current (I_Q) at low output current and by its output impedance (R_{OUT}) at higher output current; it is given by:

$$\eta \cong \frac{I_{OUT}}{I_{OUT} + I_Q}\left(1 - \frac{I_{OUT} \times R_{OUT}}{V_{IN}}\right)$$

60mA, SOT23 Inverting Charge Pump with Shutdown

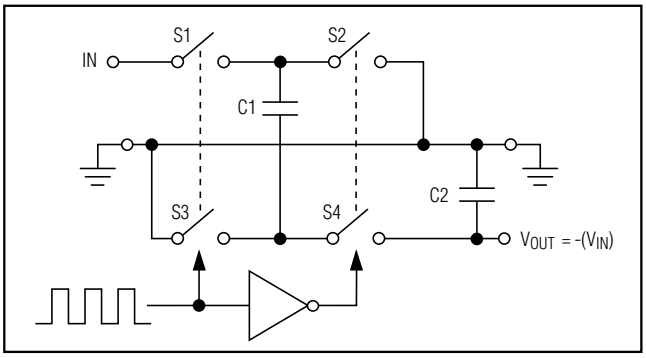


Figure 2. Ideal Voltage Inverter

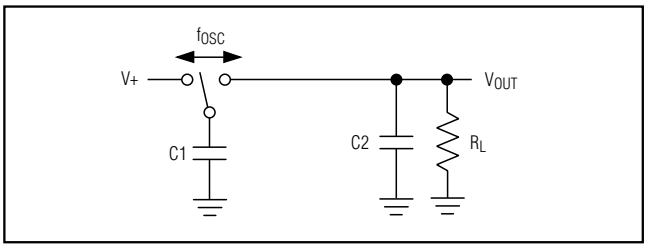


Figure 3a. Switched-Capacitor Model

where the output impedance is roughly approximated by:

$$R_{OUT} \cong \frac{1}{\left(f_{OSC}\right) \times C1} + 2R_{SW} + 4ESR_{C1} + ESR_{C2}$$

The first term is the effective resistance of an ideal switched-capacitor circuit (Figures 3a and 3b), and R_{SW} is the sum of the charge pump's internal switch resistances (typically 4Ω to 5Ω at V_{IN} = +5V). The typical output impedance is more accurately determined from the *Typical Operating Characteristics*.

Current Limit

The MAX1697 limits its input current upon start-up to 170mA (typ). This prevents low-current or higher output impedance input supplies (such as alkaline cells) from being overloaded when power is applied or when the device awakes from shutdown.

Shutdown

The MAX1697 has a logic-controlled shutdown input. Driving $\overline{SHDN}$ low places the device in a low-power shutdown mode. The charge-pump switching halts, supply current is reduced to 2nA, and OUT is actively pulled to ground through a 3Ω resistance.

Driving $\overline{SHDN}$ high will restart the charge pump. The switching frequency and capacitor values determine how soon the device will reach 90% of the input voltage.

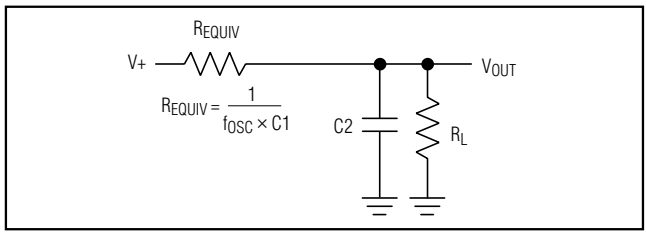


Figure 3b. Equivalent Circuit

Thermal Shutdown

The MAX1697 has a thermal shutdown mode for additional protection against fault conditions. When the temperature of the die exceeds +150°C, the internal clock stops, suspending the device's operation. The MAX1697 resumes operation when the die temperature falls 15°C. This prevents the device from rapidly oscillating around the temperature trip point.

Applications Information

Capacitor Selection

The charge-pump output resistance is a function of the ESR of C1 and C2. To maintain the lowest output resistance, use capacitors with low ESR. (See Table 1 for a list of recommended manufacturers.) Tables 2 and 3 suggest capacitor values for minimizing output resistance or capacitor size.

Flying Capacitor (C1)

Increasing the flying capacitor's value reduces the output resistance. Above a certain point, increasing C1's capacitance has negligible effect because the output resistance is then dominated by internal switch resistance and capacitor ESR.

Output Capacitor (C2)

Increasing the output capacitor's value reduces the output ripple voltage. Decreasing its ESR reduces both output resistance and ripple. Lower capacitance values can be used with light loads if higher output ripple can be tolerated. Use the following equation to calculate the peak-to-peak ripple:

$$V_{RIPPLE} = \frac{I_{OUT}}{2(f_{OSC})C2} + 2 \times I_{OUT} \times ESR_{C2}$$

Input Bypass Capacitor (C3)

If necessary, bypass the incoming supply to reduce its AC impedance and the impact of the MAX1697's switching noise. A bypass capacitor with a value equal to that of C1 is recommended.

Voltage Inverter

The most common application for these devices is a charge-pump voltage inverter (Figure 1). This application requires only two external components—capacitors C1 and C2—plus a bypass capacitor, if necessary. Refer to the *Capacitor Selection* section for suggested capacitor types.

Cascading Devices

Two devices can be cascaded to produce an even larger negative voltage (Figure 4). The unloaded output voltage is normally $-2 \times V_{IN}$, but this is reduced slightly by the output resistance of the first device multiplied by the quiescent current of the second. When cascading more than two devices, the output resistance rises dramatically. For applications requiring larger negative voltages, see the MAX865 and MAX868 data sheets. The maximum load current and startup current of the nth cascaded circuit must not exceed the maximum output current capability of the (n-1)th circuit to ensure proper startup.

Paralleling Devices

Paralleling multiple MAX1697s reduces the output resistance. Each device requires its own pump capacitor (C1), but the reservoir capacitor (C2) serves all devices (Figure 5). Increase C2's value by a factor of *n*, where *n* is the number of parallel devices. Figure 5 shows the equation for calculating output resistance.

Combined Doubler/Inverter

In the circuit of Figure 6, capacitors C1 and C2 form the inverter, while C3 and C4 form the doubler. C1 and C3 are the pump capacitors; C2 and C4 are the reservoir capacitors. Because both the inverter and doubler use part of the charge-pump circuit, loading either output causes both outputs to decline toward GND. Make sure the sum of the currents drawn from the two outputs does not exceed 60mA.

Heavy Load Connected to a Positive Supply

Under heavy loads, where a higher supply is sourcing current into OUT, the OUT supply must not be pulled above ground. Applications that sink heavy current into OUT require a Schottky diode (1N5817) between GND and OUT, with the anode connected to OUT (Figure 7).

Layout and Grounding

Good layout is important, primarily for good noise performance. To ensure good layout, mount all components as close together as possible, keep traces short to minimize parasitic inductance and capacitance, and use a ground plane.

Table 1. Low-ESR Capacitor Manufacturers

PRODUCTION METHOD	MANUFACTURER	SERIES	PHONE	FAX
Surface-Mount Tantalum	AVX	TPS series	803-946-0690	803-626-3123
	Matsuo	267 series	714-969-2491	714-960-6492
	Sprague	593D, 595D series	603-224-1961	603-224-1430
Surface-Mount Ceramic	AVX	X7R	803-946-0690	803-626-3123
	Matsuo	X7R	714-969-2491	714-960-6492

Table 2. Capacitor Selection to Minimize Output Resistance

PART	FREQUENCY (kHz)	CAPACITOR (µF)	TYPICAL R_{OUT} (Ω)
MAX1697R	12	22	12
MAX1697S	35	6.8	12
MAX1697T	125	2.2	12
MAX1697U	250	1	12

Table 3. Capacitor Selection to Minimize Capacitor Size

PART	FREQUENCY (kHz)	CAPACITOR (µF)	TYPICAL R_{OUT} (Ω)
MAX1697R	12	10	17
MAX1697S	35	3.3	17
MAX1697T	125	1	17
MAX1697U	250	0.47	17

60mA, SOT23 Inverting Charge Pump with Shutdown

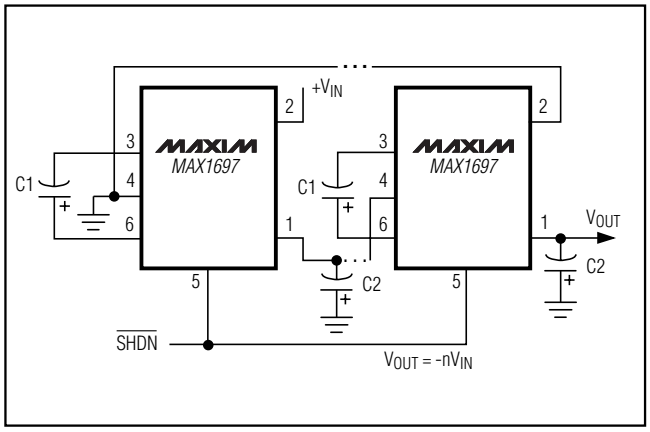


Figure 4. Cascading MAX1697s to Increase Output Voltage

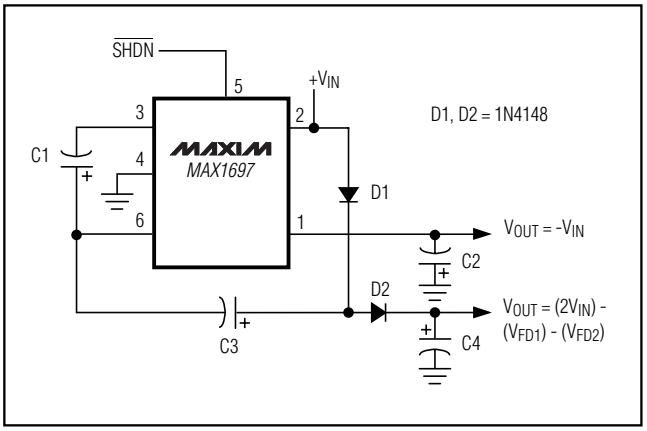


Figure 6. Combined Doubler and Inverter

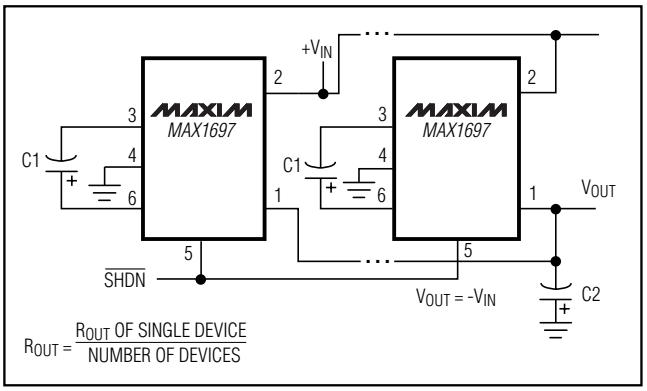


Figure 5. Paralleling MAX1697s to Reduce Output Resistance

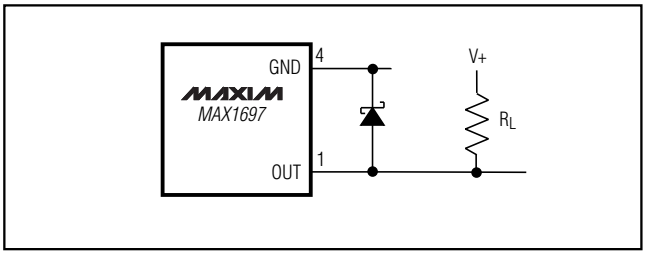


Figure 7. Heavy Load Connected to a Positive Supply

Chip Information


TRANSISTOR COUNT: 275

60mA, SOT23 Inverting Charge Pump with Shutdown

Package Information

For the latest package outline information and land patterns, go to **www.maxim-ic.com/packages**.

PACKAGE TYPE	PACKAGE CODE	DOCUMENT NO.
6 SOT23	U6F-6	21-0058

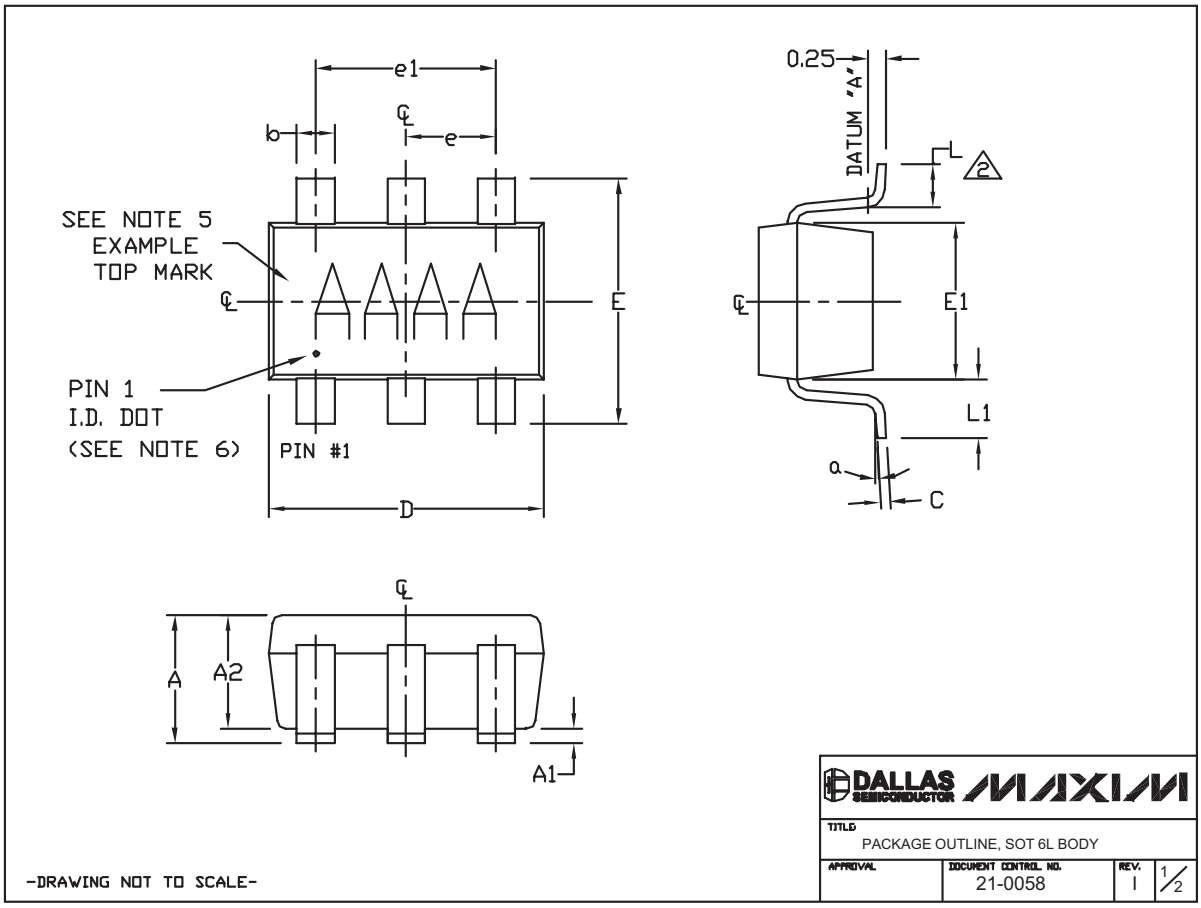

60mA, SOT23 Inverting Charge Pump with Shutdown

Package Information (continued)

For the latest package outline information and land patterns, go to **www.maxim-ic.com/packages**.

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. FOOT LENGTH MEASURED AT INTERCEPT POINT BETWEEN DATUM A & LEAD SURFACE.
3. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR. MOLD FLASH, PROTRUSION OR METAL BURR SHOULD NOT EXCEED 0.25mm.
4. PACKAGE OUTLINE INCLUSIVE OF SOLDER PLATING.
5. PIN 1 IS LOWER LEFT PIN WHEN READING TOP MARK FROM LEFT TO RIGHT. (SEE EXAMPLE TOP MARK)
6. PIN 1 I.D. DOT IS 0.3mm ø MIN. LOCATED ABOVE PIN 1.
7. MEETS JEDEC MO178, VARIATION AB.
8. SOLDER THICKNESS MEASURED AT FLAT SECTION OF LEAD BETWEEN 0.08mm AND 0.15mm FROM LEADTIP.
9. LEAD TO BE COPLANAR WITHIN 0.1mm.
10. NUMBER OF LEADS SHOWN ARE FOR REFERENCE ONLY.
11. MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY.

SYMBOL	MIN	NOMINAL	MAX
A	0.90	1.25	1.45
A1	0.00	0.05	0.15
A2	0.90	1.10	1.30
b	0.35	0.40	0.50
C	0.08	0.15	0.20
D	2.80	2.90	3.00
E	2.60	2.80	3.00
E1	1.50	1.625	1.75
L	0.35	0.45	0.60
L1		0.60 REF.	
e1		1.90 BSC.	
e		0.95 BSC.	
α	0°	2.5°	10°

PKG CODES:
U6-1, U6-2, U6-4, U6C-8, U6SN-1, U6CN-2, U6S-3, U6F-5, U6F-6, U6FH-5, U6FH-6

-DRAWING NOT TO SCALE-

DALLAS SEMICONDUCTOR MAXIM

TITLE: PACKAGE OUTLINE, SOT 6L BODY

APPROVAL	DOCUMENT CONTROL NO.	REV.	
	21-0058	I	2/2

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
3	12/08	Added additional available top mark for RoHS compliance	1

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

© 2008 Maxim Integrated Products MAXIM is a registered trademark of Maxim Integrated Products, Inc.