Click here to ask an associate for production status of specific part numbers.

µP Reset Circuits with Capacitor-Adjustable Reset/Watchdog Timeout Delay

MAX6746–MAX6753

General Description

The MAX6746–MAX6753 low-power microprocessor (µP) supervisory circuits monitor single/dual system supply voltages from 1.575V to 5V and provide maximum adjustability for reset and watchdog functions. These devices assert a reset signal whenever the V_{CC} supply voltage or RESET IN falls below its reset threshold or when manual reset is pulled low. The reset output remains asserted for the reset timeout period after V_{CC} and RESET IN rise above the reset threshold. The reset function features immunity to power-supply transients.

The MAX6746–MAX6753 have ±2% factory-trimmed reset threshold voltages in approximately 100mV increments from 1.575V to 5.0V and/or adjustable reset threshold voltages using external resistors.

The reset and watchdog delays are adjustable with external capacitors. The MAX6746–MAX6751 contain a watchdog select input that extends the watchdog timeout period by 128x. The MAX6752/MAX6753 contain a window watchdog timer that looks for activity outside an expected window of operation.

The MAX6746–MAX6753 are available with a push-pull or open-drain active-low $\overline{RESET}$ output. The MAX6746–MAX6753 are available in an 8-pin SOT23 package and are fully specified over the automotive temperature range (-40°C to +125°C).

Applications


- Medical Equipment
- Automotive
- Intelligent Instruments
- Portable Equipment
- Battery-Powered Computers/Controllers
- Embedded Controllers
- Critical µP Monitoring
- Set-Top Boxes
- Computers

***Selector Guide* and *Ordering Information* appear at end of data sheet.**

Benefits and Features

- Configurable Reset and Watchdog Options Enables Wide Variety of Applications
  - Factory-Set Reset Threshold Options from 1.575V to 5V in ~100mV Increments
  - Adjustable Reset Threshold Options
  - Single/Dual Voltage Monitoring
  - Capacitor-Adjustable Reset Timeout
  - Capacitor-Adjustable Watchdog Timeout
  - Min/Max (Windowed) Watchdog Option
  - Manual-Reset Input Option
  - Push-Pull or Open-Drain $\overline{RESET}$ Output Options
- 3.7µA Supply Current Reduces System Power Consumption
- Integrated Power Supply Protection Increases Robustness
  - Power-Supply Transient Immunity
  - Guaranteed $\overline{RESET}$ Valid for V_{CC} ≥ 1V
- 8-Pin SOT23 Packages Saves Board Space
- AEC-Q100 Qualified. Refer to ***Ordering Information*** for Specific /V Trim Variants

Typical Operating Circuit

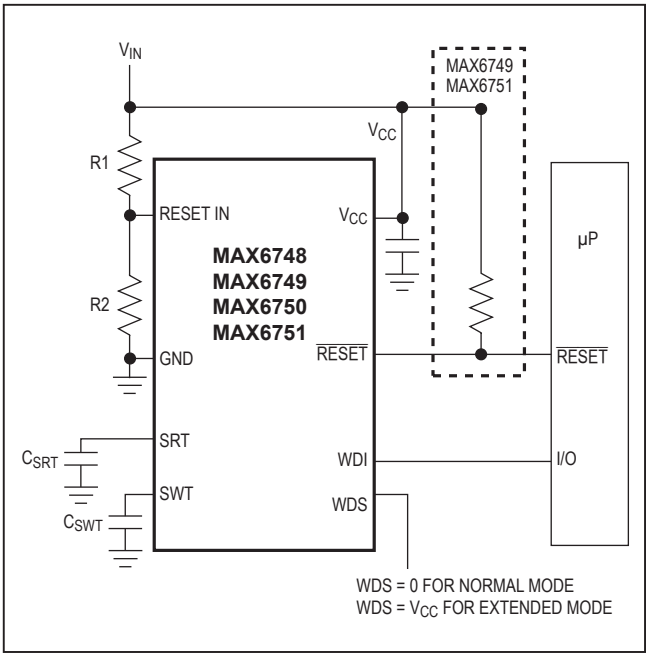

19-2530; Rev 23; 3/25

© 2025 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.

Absolute Maximum Ratings

V_{CC} to GND.....-0.3V to +6.0V
SRT, SWT, SET0, SET1, RESET IN, WDS, $\overline{MR}$, WDI, to GND.....-0.3V to (V_{CC} + 0.3V)
$\overline{RESET}$ (Push-Pull) to GND.....-0.3V to (V_{CC} + 0.3V)
$\overline{RESET}$ (Open-Drain) to GND.....-0.3V to +6.0V
Input Current (All Pins).....±20mA
Output Current ($\overline{RESET}$) .....±20mA

Continuous Power Dissipation (T_A = +70°C)
8-Pin SOT23 (derate 5.1mW/°C above +70°C).....408.2mW
Operating Temperature Range .....-40°C to +125°C
Storage Temperature Range .....-65°C to +150°C
Junction Temperature.....+150°C
Lead Temperature (soldering, 10s) .....+300°C
Soldering Temperature (reflow) .....+260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

8 SOT23

PACKAGE CODE	K8+5, K8+5A
Outline Number	21-0078
Land Pattern Number	90-0176
Thermal Resistance, Single-Layer Board	
Junction-to-Ambient (θ_{JA})	N/A
Junction-to-Case (θ_{JC})	800
Thermal Resistance, Four-Layer Board	
Junction-to-Ambient (θ_{JA})	196
Junction-to-Case (θ_{JC})	70

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maximintegrated.com/thermal-tutorial.

Electrical Characteristics

(V_{CC} = +1.2V to +5.5V, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are at V_{CC} = +5V and T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage	V_{CC}	T_A = 0°C to +125°C		1.0		5.5	V
		T_A = -40°C to 0°C		1.2		5.5	
Supply Current	I_{CC}	V_{CC} ≤ 5.5V			5	10	µA
		V_{CC} ≤ 3.3V			4.2	9	
		V_{CC} ≤ 2.0V			3.7	8	
V_{CC} Reset Threshold	V_{TH}	See V_{TH} selection table	T_A = -40°C to +125°C	V_{TH} - 2%		V_{TH} + 2%	V
Hysteresis	V_{HYST}				0.8		%
V_{CC} Reset Threshold (MAX6752AKA32 Only)		TA = -40°C to +125°C		3.136		3.224	V
Hysteresis (MAX6752AKA32 Only)	V_{HYST}			0.65	0.80	0.90	%
V_{CC} to Reset Delay		V_{CC} falling from V_{TH} + 100mV to V_{TH} -100mV at 1mV/µs			20		µs
Reset Timeout Period	t_{RP}	C_{SRT} = 1500pF		5.692	7.590	9.487	ms
		C_{SRT} = 100pF			0.506		
SRT Ramp Current	I_{RAMP}	V_{SRT} = 0 to 1.23V; V_{CC} = 1.6V to 5V		200	250	300	nA
SRT Ramp Threshold	V_{RAMP}	V_{CC} = 1.6V to 5V (V_{RAMP} rising)		1.173	1.235	1.297	V

Electrical Characteristics (continued)

(V_{CC} = +1.2V to +5.5V, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are at V_{CC} = +5V and T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Normal Watchdog Timeout Period (MAX6746–MAX6751)	t_{WD}	C_{SWT} = 1500pF	5.692	7.590	9.487	ms
		C_{SWT} = 100pF		0.506		
Extended Watchdog Timeout (MAX6746–MAX6751)	t_{WD}	C_{SWT} = 1500pF	728.6	971.5	1214.4	ms
		C_{SWT} = 100pF		64.77		
Slow Watchdog Period (MAX6752/MAX6753)	t_{WD2}	C_{SWT} = 1500pF	728.6	971.5	1214.4	ms
		C_{SWT} = 100pF		64.77		
Fast Watchdog Timeout Period, SET Ratio = 8, (MAX6752/MAX6753)	t_{WD1}	C_{SWT} = 1500pF	91.08	121.43	151.80	ms
		C_{SWT} = 100pF		8.09		
Fast Watchdog Timeout Period, SET Ratio = 16, (MAX6752/MAX6753)	t_{WD1}	C_{SWT} = 1500pF	45.53	60.71	75.89	ms
		C_{SWT} = 100pF		4.05		
Fast Watchdog Timeout Period, SET Ratio = 64, (MAX6752/MAX6753)	t_{WD1}	C_{SWT} = 1500pF	11.38	15.18	18.98	ms
		C_{SWT} = 100pF		1.01		
Fast Watchdog Minimum Period (MAX6752/MAX6753)			2000			ns
SWT Ramp Current	I_{RAMP}	V_{SWT} = 0 to 1.23V, V_{CC} = 1.6V to 5V	200	250	300	nA
SWT Ramp Threshold	V_{RAMP}	V_{CC} = 1.6V to 5V (V_{RAMP} rising)	1.173	1.235	1.297	V
$\overline{RESET}$ Output-Voltage Low Open-Drain, Push-Pull (Asserted)	V_{OL}	V_{CC} ≥ 1.0V, I_{SINK} = 50µA			0.3	V
		V_{CC} ≥ 2.7V, I_{SINK} = 1.2mA			0.3	
		V_{CC} ≥ 4.5V, I_{SINK} = 3.2mA			0.4	
$\overline{RESET}$ Output-Voltage High, Push-Pull (Not Asserted)	V_{OH}	V_{CC} ≥ 1.8V, I_{SOURCE} = 200µA	0.8 x V_{CC}			V
		V_{CC} ≥ 2.25V, I_{SOURCE} = 500µA	0.8 x V_{CC}			
		V_{CC} ≥ 4.5V, I_{SOURCE} = 800µA	0.8 x V_{CC}			
$\overline{RESET}$ Output Leakage Current, Open Drain	I_{LKG}	V_{CC} > V_{TH}, reset not asserted, $V_{\overline{RESET}}$ = 5.5V			1.0	µA
DIGITAL INPUTS ($\overline{MR}$, SET0, SET1, WDI, WDS)						
Input Logic Levels	V_{IL}	V_{CC} ≥ 4.0V			0.8	V
	V_{IH}		2.4			
	V_{IL}	V_{CC} < 4.0V			0.3 x V_{CC}	
	V_{IH}		0.7 x V_{CC}			
$\overline{MR}$ Minimum Pulse Width			1			µs
$\overline{MR}$ Glitch Rejection				100		ns
$\overline{MR}$-to-$\overline{RESET}$ Delay				200		ns
$\overline{MR}$ Pullup Resistance		Pullup to V_{CC}	12	20	28	kΩ
WDI Minimum Pulse Width			300			ns

Electrical Characteristics (continued)

(V_{CC} = +1.2V to +5.5V, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are at V_{CC} = +5V and T_A = +25°C.) (Note 1)


PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
RESET IN							
RESET IN Threshold	$V_{RESET\ IN}$		T_A = -40°C to +125°C	1.216	1.235	1.254	V
RESET IN Leakage Current	$I_{RESET\ IN}$			-50	±1	+50	nA
RESET IN to $\overline{RESET}$ Delay		RESET IN falling at 1mV/µs			20		µs

Note 1: Production testing done at T_A = +25°C. Over temperature limits are guaranteed by design.


Typical Operating Characteristics

(V_{CC} = +5V, T_A = +25°C, unless otherwise noted.)


RESET TIMEOUT PERIOD vs. C_{SRT}

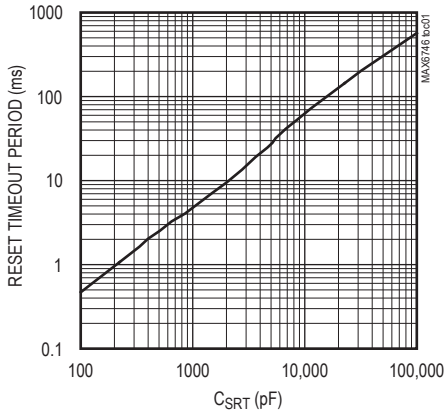


WATCHDOG TIMEOUT PERIOD vs. C_{SWT}

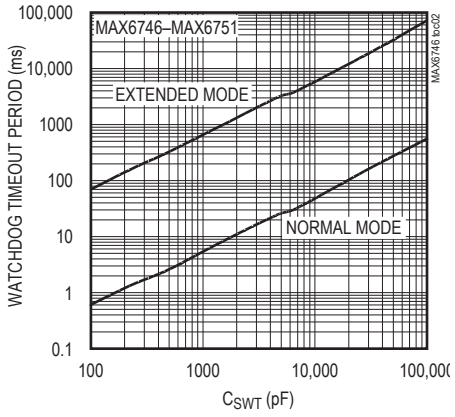


SUPPLY CURRENT vs. SUPPLY VOLTAGE

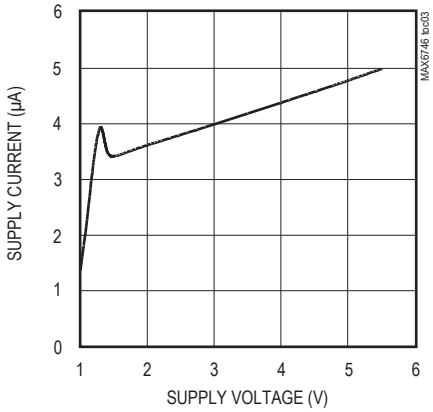


NORMALIZED RESET TIMEOUT PERIOD vs. TEMPERATURE

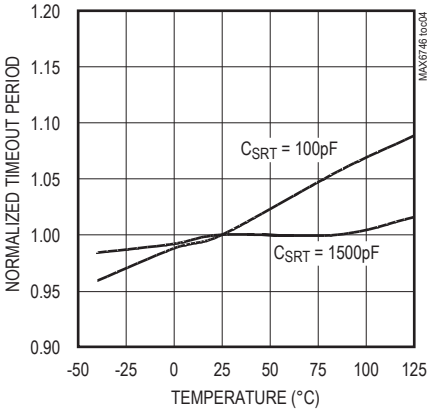

NORMALIZED WATCHDOG TIMEOUT PERIOD vs. TEMPERATURE

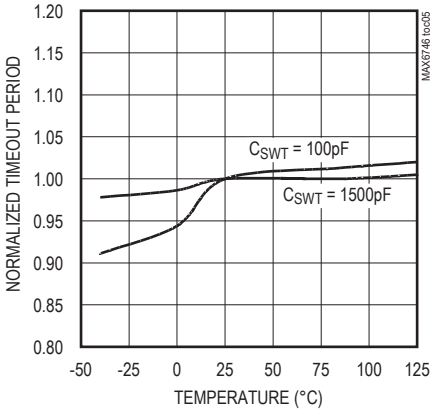


MAXIMUM TRANSIENT DURATION vs. RESET THRESHOLD OVERDRIVE

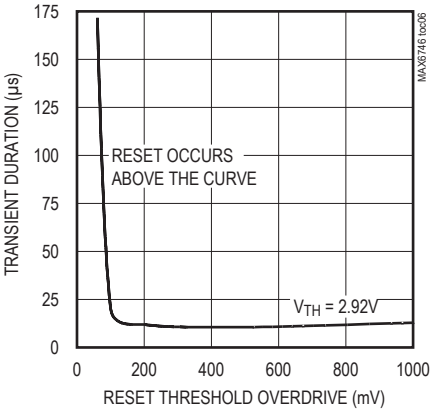


Typical Operating Characteristics (continued)

(V_{CC} = +5V, T_A = +25°C, unless otherwise noted.)


SUPPLY CURRENT vs. TEMPERATURE

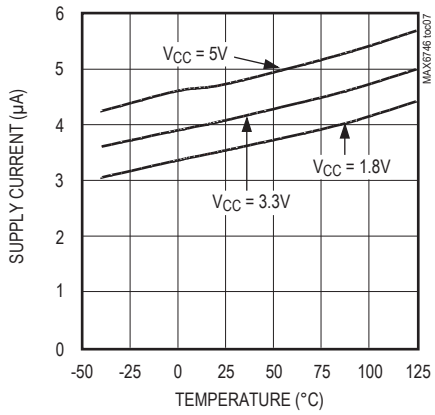


NORMALIZED RESET IN THRESHOLD VOLTAGE vs. TEMPERATURE

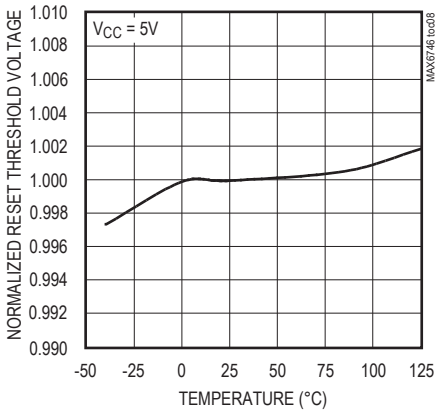


RESET IN THRESHOLD vs. SUPPLY VOLTAGE

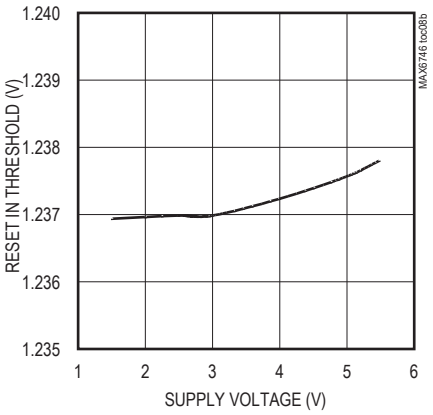


VCC TO RESET DELAY vs. TEMPERATURE (VCC FALLING)

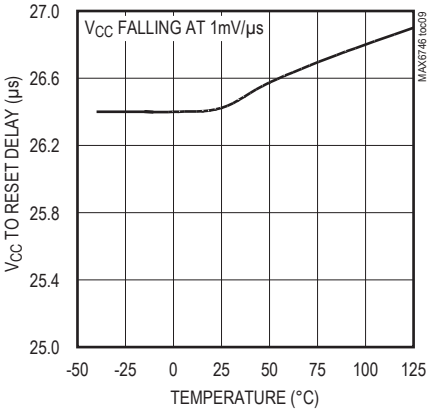


RESET AND WATCHDOG TIMEOUT PERIOD vs. SUPPLY VOLTAGE

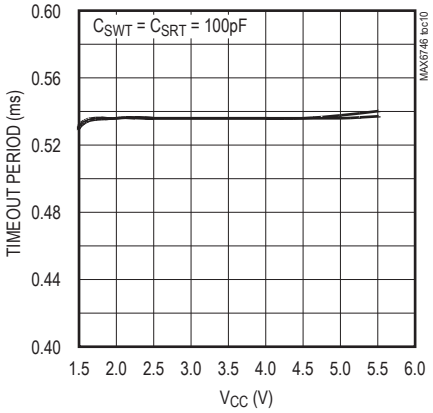

RESET AND WATCHING TIMEOUT PERIOD vs. SUPPLY VOLTAGE

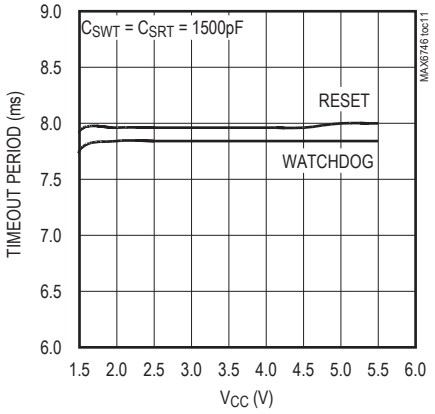

Pin Configurations

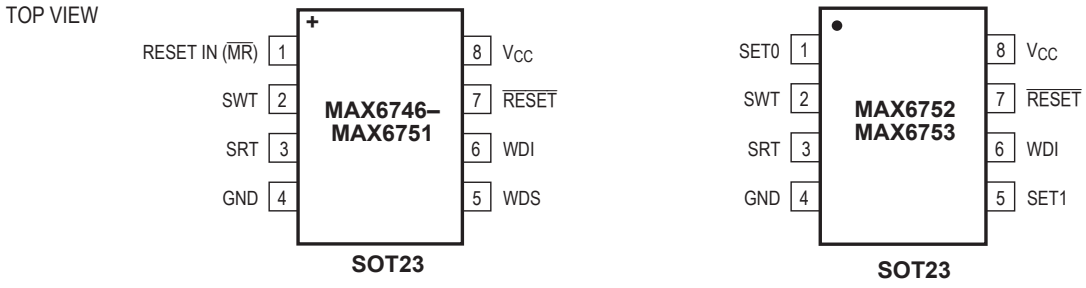

( ) ARE FOR MAX6746 AND MAX6747 ONLY.

Pin Descriptions

PIN			NAME	FUNCTION
MAX6746 MAX6747	MAX6748–MAX6751	MAX6752 MAX6753		
1	—	—	$\overline{MR}$	Manual-Reset Input. Pull $\overline{MR}$ low to manually reset the device. Reset remains asserted for the reset timeout period after $\overline{MR}$ is released.
—	1	—	RESET IN	Reset Input. High-impedance input to the adjustable reset comparator. Connect RESET IN to the center point of an external resistor-divider to set the threshold of the externally monitored voltage.
—	—	1	SET0	Logic Input. SET0 selects watchdog window ratio or disables the watchdog timer. See Table 1.
2	2	2	SWT	Watchdog Timeout Input. MAX6746–MAX6751: Connect a capacitor between SWT and ground to set the basic watchdog timeout period (t_{WD}). Determine the period by the formula $t_{WD} = 4.94 \times 10^6 \times C_{SWT}$ with t_{WD} in seconds and C_{SWT} in Farads. Extend the basic watchdog timeout period by using the WDS input. Connect SWT to ground to disable the watchdog timer function. MAX6752/MAX6753: Connect a capacitor between SWT and ground to set the slow watchdog timeout period (t_{WD2}). Determine the slow watchdog period by the formula: $t_{WD2} = 0.65 \times 10^9 \times C_{SWT}$ with t_{WD2} in seconds and C_{SWT} in Farads. The fast watchdog timeout period is set by pin strapping SET0 and SET1 (Connect SET0 high and SET1 low to disable the watchdog timer function.) See Table 1.
3	3	3	SRT	Reset Timeout Input. Connect a capacitor from SRT to GND to select the reset timeout period. Determine the period as follows: $t_{RP} = 4.94 \times 10^6 \times C_{SRT}$ with t_{RP} in seconds and C_{SRT} in Farads.
4	4	4	GND	Ground
5	5	—	WDS	Watchdog Select Input. WDS selects the watchdog mode. Connect WDS to ground to select normal mode and the watchdog timeout period. Connect WDS to V_{CC} to select extended mode, multiplying the basic timeout period by a factor of 128. A change in the state of WDS clears the watchdog timer.

Pin Descriptions (continued)

PIN			NAME	FUNCTION
MAX6746 MAX6747	MAX6748–MAX6751	MAX6752 MAX6753		
—	—	5	SET1	Logic Input. SET1 selects the watchdog window ratio or disables the watchdog timer. See Table 1.
6	6	6	WDI	Watchdog Input. MAX6746–MAX6751: A falling transition must occur on WDI within the selected watchdog timeout period or a reset pulse occurs. The watchdog timer clears when a transition occurs on WDI or whenever $\overline{RESET}$ is asserted. Connect SWT to ground to disable the watchdog timer function. WDI must not be left floating. Connect a 100k resistor from WDI to ground to ensure proper operation when watchdog function is not used. MAX6752/MAX6753: WDI falling transitions within periods shorter than t_{WD1} or longer than t_{WD2} force $\overline{RESET}$ to assert low for the reset timeout period. The watchdog timer begins to count after $\overline{RESET}$ is deasserted. The watchdog timer clears when a valid transition occurs on WDI or whenever $\overline{RESET}$ is asserted. Connect SET0 high and SET1 low to disable the watchdog timer function. See the *Watchdog Timer* section. WDI must not be left floating. Connect a 100k resistor from WDI to ground to ensure proper operation when watchdog function is not used.
7	7	7	$\overline{RESET}$	Push/Pull or Open-Drain Reset Output. $\overline{RESET}$ asserts whenever V_{CC} or $\overline{RESET}$ IN drops below the selected reset threshold voltage (V_{TH} or $V_{RESET\ IN}$, respectively) or manual reset is pulled low. $\overline{RESET}$ remains low for the reset timeout period after all reset conditions are deasserted, and then goes high. The watchdog timer triggers a reset pulse (t_{RP}) whenever a watchdog fault occurs.
8	8	8	V_{CC}	Supply Voltage. V_{CC} is the power-supply input and the input for fixed threshold V_{CC} monitor.

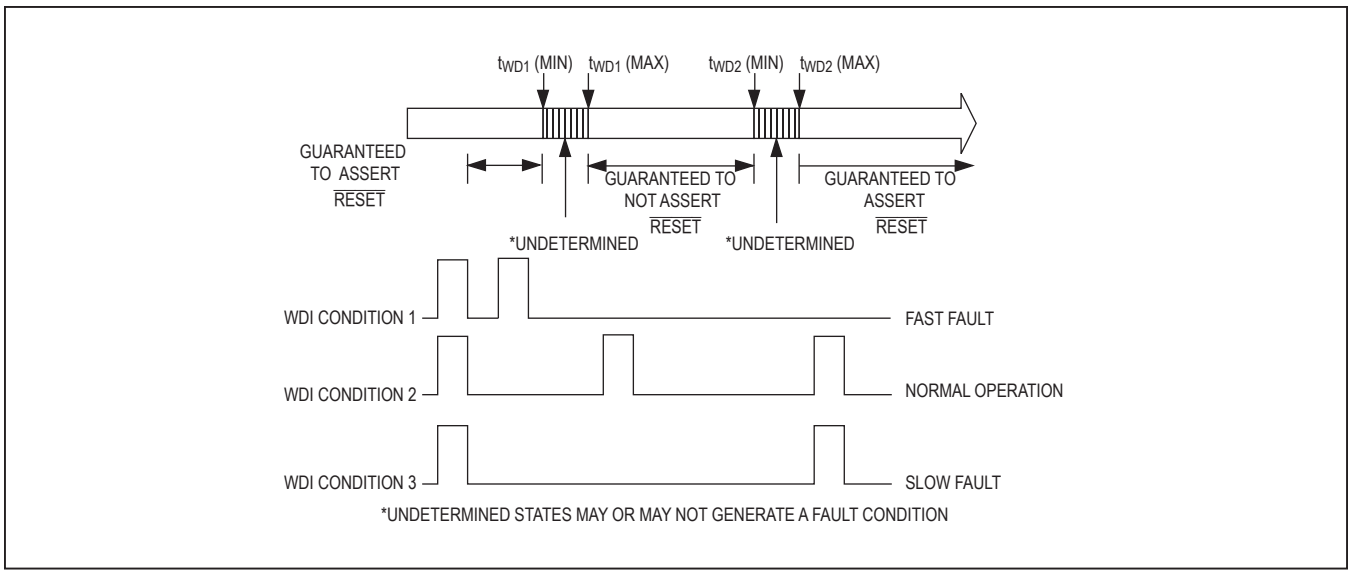


Figure 1. MAX6752/MAX6753 Detailed Watchdog Input Timing Relationship

Detailed Description

The MAX6746–MAX6753 assert a reset signal whenever the V_{CC} supply voltage or RESET IN falls below its reset threshold. The reset output remains asserted for the reset timeout period after V_{CC} and RESET IN rise above its respective reset threshold. A watchdog timer triggers a reset pulse whenever a watchdog fault occurs.

The reset and watchdog delays are adjustable with external capacitors. The MAX6746–MAX6751 contain a watchdog select input that extends the watchdog timeout period to 128x.

The MAX6752 and MAX6753 have a sophisticated watchdog timer that detects when the processor is running outside an expected window of operation. The watchdog signals a fault when the input pulses arrive too early (faster that the selected t_{WD1} timeout period) or too late (slower than the selected t_{WD2} timeout period) (see Figure 1).

Reset Output

The reset output is typically connected to the reset input of a µP. A µP's reset input starts or restarts the µP in a known state. The MAX6746–MAX6753 µP supervisory circuits provide the reset logic to prevent code-execution errors during power-up, power-down, and brownout conditions (see the *Typical Operating Circuit*). $\overline{\text{RESET}}$ changes from high to low whenever the monitored voltage, $\overline{\text{RESET}}$ IN and/or V_{CC} drop below the reset threshold voltages. Once $V_{RESET\ IN}$ and/or V_{CC} exceeds its respective reset threshold voltage(s), RESET remains low for the reset timeout period, then goes high.

$\overline{\text{RESET}}$ is guaranteed to be in the correct logic state for V_{CC} greater than 1V. For applications requiring valid reset logic when V_{CC} is less than 1V, see the *Ensuring a Valid RESET Down to VCC = 0V (Push-Pull RESET)* section.

RESET IN Threshold

The MAX6748–MAX6751 monitor the voltage on RESET IN using an adjustable reset threshold ($V_{RESET\ IN}$) set with an external resistor voltage-divider (Figure 2). Use the following formula to calculate the externally monitored voltage (V_{MON_TH}):

$$V_{MON_TH} = V_{RESET\ IN} \times (R1 + R2)/R2$$

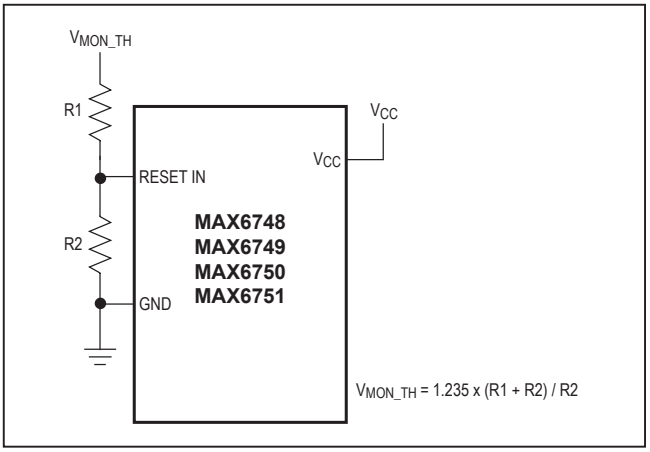


Figure 2. Calculating the Monitored Threshold Voltage (V_{MON_TH})

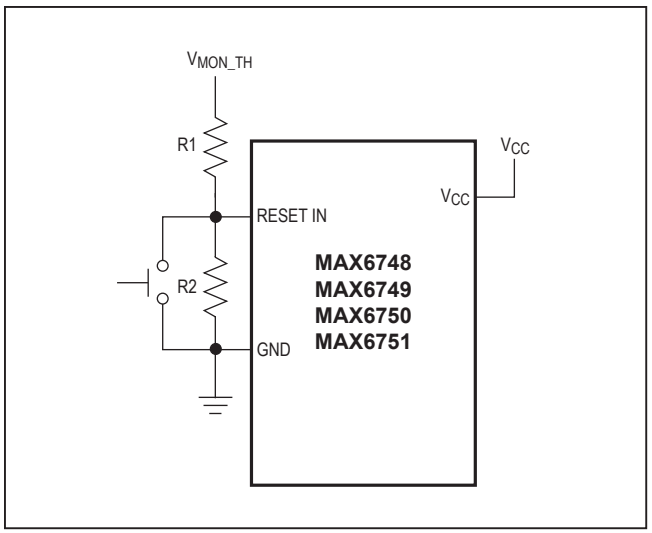


Figure 3. Adding an External Manual-Reset Function to the MAX6748–MAX6751

where V_{MON_TH} is the desired reset threshold voltage and V_{TH} is the reset input threshold (1.235V). Resistors R1 and R2 can have very high values to minimize current consumption due to low leakage currents. Set R2 to some conveniently high value (500kΩ, for example) and calculate R1 based on the desired reset threshold voltage, using the following formula:

$$R1 = R2 \times (V_{MON_TH}/V_{RESET\ IN} - 1)\ (\Omega)$$

The MAX6748 and MAX6749 do not monitor V_{CC} supply voltage; therefore, V_{CC} must be greater than 1.5V to guarantee RESET IN threshold accuracy and timing performance. The MAX6748 and MAX6749 can be configured to monitor V_{CC} voltage by connecting V_{CC} to V_{MON_TH}.

Dual-Voltage Monitoring (MAX6750/MAX6751)

The MAX6750 and MAX6751 contain both factory-trimmed threshold voltages and an adjustable reset threshold input, allowing the monitoring of two voltages, V_{CC} and V_{MON_TH} (see Figure 2). $\overline{RESET}$ is asserted when either of the voltages fall below its respective threshold voltages.

Manual Reset (MAX6746/MAX6747)

Many µP-based products require manual-reset capability to allow an operator or external logic circuitry to initiate a reset. The manual-reset input ($\overline{MR}$) can connect directly to a switch without an external pullup resistor or debouncing network. $\overline{MR}$ is internally pulled up to V_{CC} and, therefore, can be left unconnected if unused.

$\overline{MR}$ is designed to reject fast, falling transients (typically 100ns pulses) and must be held low for a minimum of 1µs to assert the reset output. A 0.1µF capacitor from $\overline{MR}$ to ground provides additional noise immunity. After $\overline{MR}$ transitions from low to high, reset remains asserted for the duration of the reset timeout period.

A manual-reset option can easily be implemented with the MAX6748–MAX6751 by connecting a normally open momentary switch in parallel with R2 (Figure 3). When the switch is closed, the voltage on RESET IN goes to zero, initiating a reset. Similar to the MAX6746/MAX6747 manual reset, reset remains asserted while the voltage at RESET IN is zero and for the reset timeout period after the switch is opened.

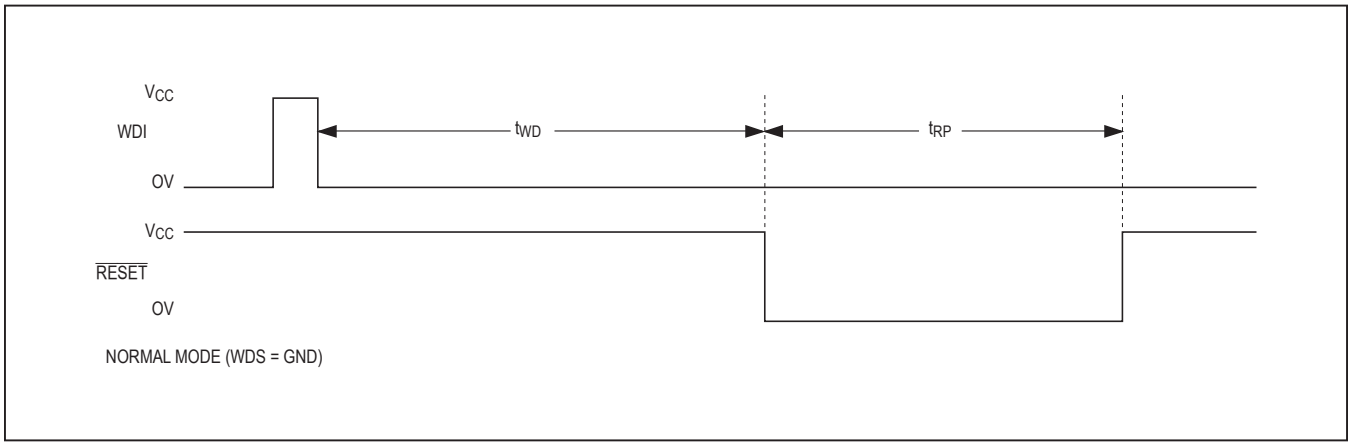


Figure 4a. Watchdog Timing Diagram, WDS = GND

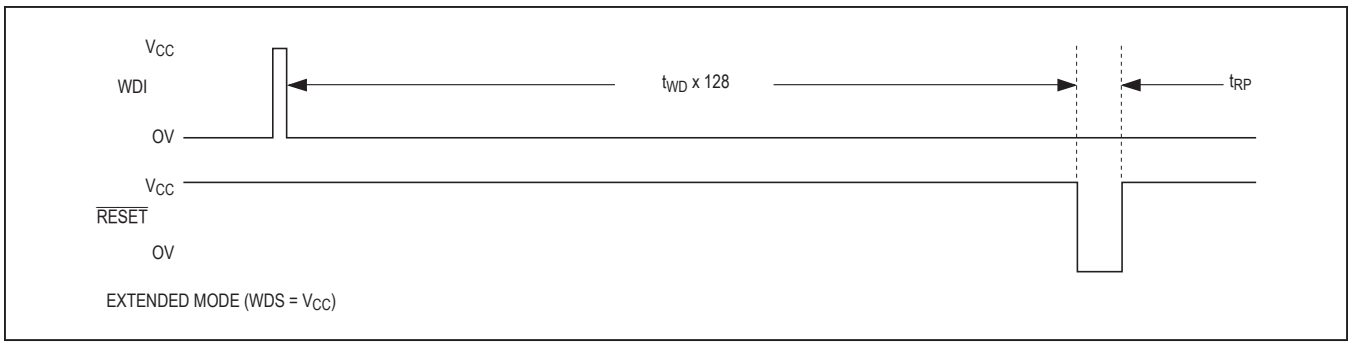


Figure 4b. Watchdog Timing Diagram, WDS = V_{CC}

Watchdog Timer

MAX6746–MAX6751

The watchdog's circuit monitors the µP's activity. It the µP does not toggle the watchdog input (WDI) within t_{WD} (user-selected), $\overline{RESET}$ asserts for the reset timeout period. The internal watchdog timer is cleared by any event that asserts $\overline{RESET}$, by a falling transition at WDI (which can detect pulses as short as 300ns), or by a transition at WDS. The watchdog timer remains cleared while reset is asserted; as soon as reset is released, the timer starts counting.

The MAX6746–MAX6751 feature two modes of watchdog operation: normal mode and extended mode. In normal mode (Figure 4a), the watchdog timeout period is determined by the value of the capacitor connected between SWT and ground. In extended mode (Figure 4b), the watchdog timeout period is multiplied by 128. For example, in extended mode, a 0.1µF capacitor gives a watchdog timeout period of 65s (see the Extended-Mode Watchdog Timeout Period vs. C_{SWT} graph in the *Typical Operating Circuit*). To disable the watchdog timer function, connect SWT to ground.

MAX6752/MAX6753

The MAX6752 and MAX6753 have a windowed watchdog timer that asserts $\overline{RESET}$ for the adjusted reset timeout period when the watchdog recognizes a fast watchdog fault ($t_{WDI} < t_{WD1}$), or a slow watchdog fault (period > t_{WD2}). The reset timeout period is adjusted independently of the watchdog timeout period.

The slow watchdog period (t_{WD2}) is calculated as follows:

$$t_{WD2} = 0.65 \times 10^9 \times C_{SWT}$$

with t_{WD2} in seconds and C_{SWT} in Farads.

The fast watchdog period (t_{WD1}) is selectable as a ratio from the slow watchdog fault period (t_{WD2}). Select the fast watchdog period by pin strapping SET0 and SET1, where high is V_{CC} and low is GND. Table 1 illustrates the SET0 and SET1 configuration for the 8, 16, and 64 window ratio (t_{WD2}/t_{WD1}).

Table 1. Min/Max Watchdog Setting

SET0	SET1	RATIO
Low	Low	8
Low	High	16
High	Low	Watchdog Disabled
High	High	64

For example, if C_{SWT} is 1500pF, and SET0 and SET1 are low, then t_{WD2} is 975ms (typ) and t_{WD1} is 122ms (typ).

$\overline{RESET}$ asserts if the watchdog input has two falling edges too close to each other (faster than t_{WD1}) (Figure 5a) or falling edges that are too far apart (slower than t_{WD2}) (Figure 5b). Normal watchdog operation is displayed in Figure 5c. The internal watchdog timer is cleared when a WDI falling edge is detected within the valid watchdog window or when $\overline{RESET}$ is deasserted. All WDI inputs are ignored while $\overline{RESET}$ is asserted.

The watchdog timer begins to count after $\overline{RESET}$ is deasserted. The watchdog timer clears and begins to count after a valid WDI falling logic input. WDI falling transitions within periods shorter than t_{WD1} or longer than t_{WD2} force $\overline{RESET}$ to assert low for the reset timeout period. WDI falling transitions within the t_{WD1} and t_{WD2} window do not assert $\overline{RESET}$. WDI transitions between $t_{WD1(min)}$ and $t_{WD1(max)}$ or $t_{WD2(min)}$ and $t_{WD2(max)}$ are not guaranteed to assert or deassert $\overline{RESET}$. To guarantee that the window watchdog does not assert $\overline{RESET}$, strobe WDI between $t_{WD1(max)}$ and $t_{WD2(min)}$. The watchdog timer is cleared when $\overline{RESET}$ is asserted or after a falling transition on WDI, or after a state change on SET0 or SET1. Disable the watchdog timer by connecting SET0 high and SET1 low.

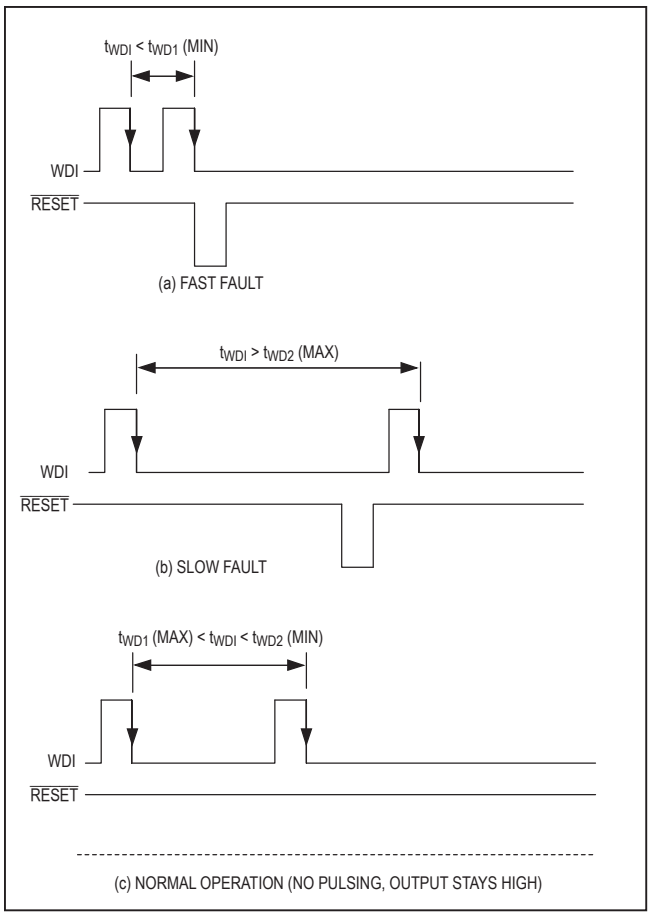


Figure 5. MAX6752/MAX6753 Window Watchdog Diagram

Applications Information

Selecting Reset/Watchdog Timeout Capacitor

The reset timeout period is adjustable to accommodate a variety of µP applications. Adjust the reset timeout period (t_{RP}) by connecting a capacitor (C_{SRT}) between SRT and ground. Calculate the reset timeout capacitor as follows:

$$C_{SRT} = t_{RP}/(4.94 \times 10^6)$$

with t_{RP} in seconds and C_{SRT} in Farads.

The watchdog timeout period is adjustable to accommodate a variety of µP applications. With this feature, the watchdog timeout can be optimized for software execution. The programmer can determine how often the watchdog timer should be serviced. Adjust the watchdog timeout period (t_{WD}) by connecting a specific value capacitor (C_{SWT}) between SWT and GND. For normal mode operation, calculate the watchdog timeout capacitor as follows:

$$C_{SWT} = t_{WD}/(4.94 \times 106)$$

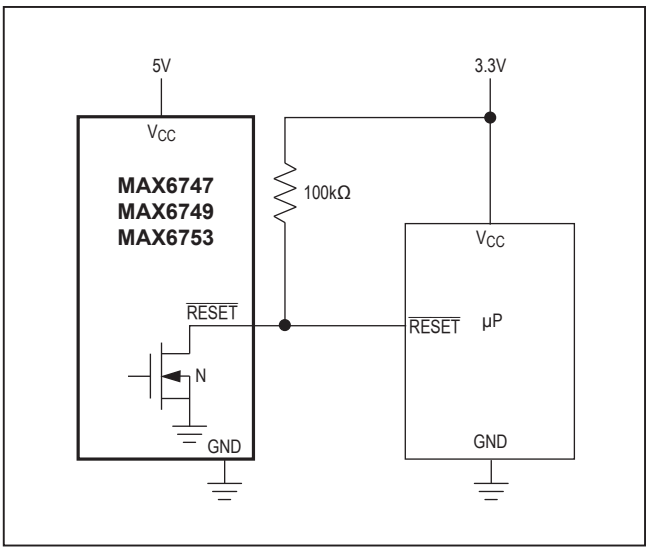


Figure 6. Interfacing to Other Voltage Levels

with t_{WD} in seconds and C_{SWT} in Farads.

For the MAX6752 and MAX6753 windowed watchdog function, calculate the slow watchdog period, t_{WD2} as follows:

$$t_{WD2} = 0.65 \times 10^9 \times C_{SWT}$$

C_{SRT} and C_{SWT} must be a low-leakage (< 10nA) type capacitor. Ceramic capacitors are recommended.

Transient Immunity

In addition to issuing a reset to the µP during power-up, power-down, and brownout conditions, these supervisors are relatively immune to short-duration supply transients (glitches). The Maximum Transient Duration vs. Reset Threshold Overdrive graph in the *Typical Operating Characteristics* shows this relationship.

The area below the curves of the graph is the region in which these devices typically do not generate a reset pulse. This graph was generated using a falling pulse applied to V_{CC}, starting above the actual reset threshold (V_{TH}) and ending below it by the magnitude indicated (reset threshold overdrive). As the magnitude of the transient increases (farther below the reset threshold), the maximum allowable pulse width decreases. Typically, a V_{CC} transient that goes 100mV below the reset threshold and lasts 50µs or less does not cause a reset pulse to be issued. For applications where the power supply to V_{CC} has high transient rates, dV/dt > 5V/50µS, an RC filter on V_{CC} is required. See Figure 8. Application Circuit for High-Input Voltage Transient Applications.

Interfacing to Other Voltages for Logic Compatibility

The open-drain $\overline{\text{RESET}}$ output can be used to interface to a µP with other logic levels. As shown in Figure 6, the open-drain output can be connected to voltages from 0 to 6V.

Generally, the pullup resistor connected to $\overline{\text{RESET}}$ connects to the supply voltage that is being monitored at the IC's V_{CC} pin. However, some systems can use the open-drain output to level-shift from the monitored supply to reset circuitry powered by some other supply. Keep in mind that as the supervisor's V_{CC} decreases towards 1V, so does the IC's ability to sink current at $\overline{\text{RESET}}$. Also, with any pullup resistor, $\overline{\text{RESET}}$ is pulled high as V_{CC} decays toward zero. The voltage where this occurs depends on the pullup resistor value and the voltage to which it is connected.

Ensuring a Valid $\overline{\text{RESET}}$ Down to V_{CC} = 0V (Push-Pull $\overline{\text{RESET}}$)

When V_{CC} falls below 1V, $\overline{\text{RESET}}$ current sinking capabilities decline drastically. The high-impedance CMOS logic inputs connected to $\overline{\text{RESET}}$ can drift to undetermined voltages. This presents no problems in most applications, since most µPs and other circuitry do not operate with V_{CC} below 1V.

In those applications where $\overline{\text{RESET}}$ must be valid down to 0V, add a pulldown resistor between $\overline{\text{RESET}}$ and GND for the MAX6746/MAX6748/MAX6750/MAX6752 push/pull outputs. The resistor sinks any stray leakage currents, holding $\overline{\text{RESET}}$ low (Figure 7). The value of the pulldown resistor is not critical; 100kΩ is large enough not to load $\overline{\text{RESET}}$ and small enough to pull $\overline{\text{RESET}}$ to ground. The external pulldown cannot be used with the open-drain reset outputs.

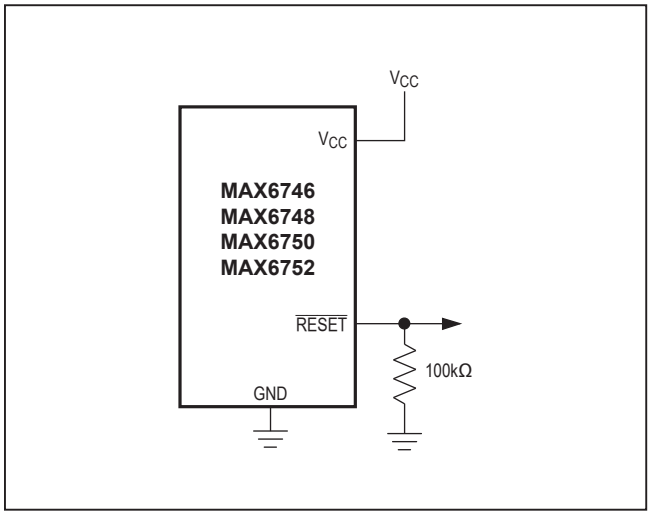


Figure 7. Ensuring $\overline{\text{RESET}}$ Valid to V_{CC} = 0V

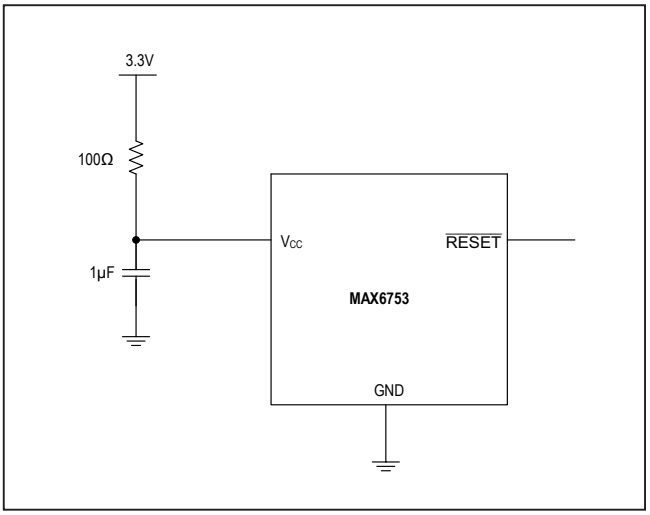


Figure 8. Application Circuit for High-Input Voltage Transient Applications

Table 2. Reset Threshold Voltage Suffix (T_A = -40°C to +125°C)

SUFFIX	MIN	TYP	MAX
50	4.900	5.000	5.100
49	4.802	4.900	4.998
48	4.704	4.800	4.896
47	4.606	4.700	4.794
46	4.533	4.625	4.718
45	4.410	4.500	4.590
44	4.288	4.375	4.463
43	4.214	4.300	4.386
42	4.116	4.200	4.284
41	4.018	4.100	4.182
40	3.920	4.000	4.080
39	3.822	3.900	3.978
38	3.724	3.800	3.876
37	3.626	3.700	3.774
36	3.528	3.600	3.672
35	3.430	3.500	3.570
34	3.332	3.400	3.468
33	3.234	3.300	3.366
32	3.136	3.200	3.264
32A (MAX6752AKA32 Only)	3.136	3.200	3.224
31	3.014	3.075	3.137
30	2.940	3.000	3.060
29	2.867	2.925	2.984
28	2.744	2.800	2.856
27	2.646	2.700	2.754
26	2.573	2.625	2.678
25	2.450	2.500	2.550
24	2.352	2.400	2.448
23	2.267	2.313	2.359
22	2.144	2.188	2.232
21	2.058	2.100	2.142
20	1.960	2.000	2.040
19	1.862	1.900	1.938
18	1.764	1.800	1.836
17	1.632	1.665	1.698
16	1.544	1.575	1.607

Sample stock is generally held on standard versions only (see Ordering Information). Standard versions have an order increment of 2500 pieces. Contact factory for availability of nonstandard versions.

Selector Guide

PART	FIXED V_{CC} RESET THRESHOLD	ADJUSTABLE RESET THRESHOLD	STANDARD WATCHDOG TIMER	MIN/MAX WATCHDOG TIMER	PUSH/ PULL $\overline{\text{RESET}}$	OPEN-DRAIN $\overline{\text{RESET}}$	MANUAL-RESET INPUT
MAX6746	X	—	X	—	X	—	X
MAX6747	X	—	X	—	—	X	X
MAX6748	—	X	X	—	X	—	—
MAX6749	—	X	X	—	—	X	—
MAX6750	X	X	X	—	X	—	—
MAX6751	X	X	X	—	—	X	—
MAX6752	X	—	—	X	X	—	—
MAX6753	X	—	—	X	—	X	—

Ordering Information

PART NUMBER	TEMPERATURE RANGE	PIN-PACKAGE	TOP MARK
MAX6746KA_ _+T	-40°C to +125°C	8 SOT23	–
MAX6746KA_ _/V+T	-40°C to +125°C	8 SOT23	–
MAX6746KA16+T	-40°C to +125°C	8 SOT23	AEDI
MAX6746KA17/V+T	-40°C to +125°C	8 SOT23	AEWL
MAX6746KA23/V+T	-40°C to +125°C	8 SOT23	AETX
MAX6746KA23+T	-40°C to +125°C	8 SOT23	AEDJ
MAX6746KA26+T	-40°C to +125°C	8 SOT23	AEDK
MAX6746KA28/V+T	-40°C to +125°C	8 SOT23	AEUM
MAX6746KA29/V+T	-40°C to +125°C	8 SOT23	AERY
MAX6746KA29+T	-40°C to +125°C	8 SOT23	AALN
MAX6746KA31/V+T	-40°C to +125°C	8 SOT23	AESQ
MAX6746KA31+T	-40°C to +125°C	8 SOT23	AEJB
MAX6746KA46+T	-40°C to +125°C	8 SOT23	AEDL
MAX6747KA_ _+T	-40°C to +125°C	8 SOT23	–
MAX6747KA_ _/V+T	-40°C to +125°C	8 SOT23	–
MAX6747KA16+T	-40°C to +125°C	8 SOT23	AALO
MAX6747KA23+T	-40°C to +125°C	8 SOT23	AEDM
MAX6747KA26+T	-40°C to +125°C	8 SOT23	AEDN
MAX6747KA29+T	-40°C to +125°C	8 SOT23	AEDO
MAX6747KA30/V+T	-40°C to +125°C	8 SOT23	AERV
MAX6747KA31/V+T	-40°C to +125°C	8 SOT23	AEQB
MAX6747KA31+T	-40°C to +125°C	8 SOT23	AEJC
MAX6747KA46/V+T	-40°C to +125°C	8 SOT23	AEQC
MAX6747KA46+T	-40°C to +125°C	8 SOT23	AEDP
MAX6748KA+T	-40°C to +125°C	8 SOT23	AALP
MAX6749KA+T	-40°C to +125°C	8 SOT23	AALQ
MAX6750KA_ _+T	-40°C to +125°C	8 SOT23	–
MAX6750KA_ _/V+T	-40°C to +125°C	8 SOT23	–
MAX6750KA29/V+T	-40°C to +125°C	8 SOT23	AETQ
MAX6750KA29+T	-40°C to +125°C	8 SOT23	AEDS
MAX6750KA30/V+T	-40°C to +125°C	8 SOT23	AERB
MAX6750KA30+T	-40°C to +125°C	8 SOT23	AERA
MAX6750KA32/V+T	-40°C to +125°C	8 SOT23	AETI
MAX6750KA43+T	-40°C to +125°C	8 SOT23	AEKI
MAX6751KA_ _+T	-40°C to +125°C	8 SOT23	–
MAX6751KA_ _/V+T	-40°C to +125°C	8 SOT23	–
MAX6751KA16+T	-40°C to +125°C	8 SOT23	AEDU
MAX6751KA17/V+T	-40°C to +125°C	8 SOT23	AEQR
MAX6751KA17+T	-40°C to +125°C	8 SOT23	AEPS
MAX6751KA26+T	-40°C to +125°C	8 SOT23	AEDW
MAX6751KA29+T	-40°C to +125°C	8 SOT23	AEDX
MAX6751KA30/V+T	-40°C to +125°C	8 SOT23	AEQT
MAX6751KA30+T	-40°C to +125°C	8 SOT23	AEPU
MAX6751KA31+T	-40°C to +125°C	8 SOT23	AALS
MAX6751KA44+T	-40°C to +125°C	8 SOT23	AEUC
MAX6751KA46+T	-40°C to +125°C	8 SOT23	AEDY
MAX6752KA_ _+T	-40°C to +125°C	8 SOT23	–
MAX6752KA_ _/V+T	-40°C to +125°C	8 SOT23	–
MAX6752AKA32/V+T	-40°C to +125°C	8 SOT23	AEUI
MAX6752AKA32+T	-40°C to +125°C	8 SOT23	AETU
MAX6752KA29+T	-40°C to +125°C	8 SOT23	AEEB
MAX6752KA46+T	-40°C to +125°C	8 SOT23	AEEC
MAX6753KA_ _+T	-40°C to +125°C	8 SOT23	–
MAX6753KA_ _/V+T	-40°C to +125°C	8 SOT23	–
MAX6753KA16+T	-40°C to +125°C	8 SOT23	AEED
MAX6753KA26+T	-40°C to +125°C	8 SOT23	AEEF
MAX6753KA29/V+T	-40°C to +125°C	8 SOT23	AEQN
MAX6753KA29+T	-40°C to +125°C	8 SOT23	AEEG
MAX6753KA30/V+T	-40°C to +125°C	8 SOT23	AERZ
MAX6753KA31/V+T	-40°C to +125°C	8 SOT23	AEUE
MAX6753KA31+T	-40°C to +125°C	8 SOT23	AEJX
MAX6753KA46/V+T	-40°C to +125°C	8 SOT23	AEQZ
MAX6753KA46+T	-40°C to +125°C	8 SOT23	AEEH

Note: *"_ _" represents the two number suffix needed when ordering the reset threshold voltage value for the MAX6746/MAX6747 and MAX6750–MAX6753. The reset threshold voltages are available in approximately 100mV increments. Table 2 contains the suffix and reset factory-trimmed voltages. All devices are available in tape-and-reel only. Sample stock is generally held on standard versions only (see Ordering Information). Standard versions have an order increment of 2500 pieces. Contact factory for availability of nonstandard versions.*

+Denotes a lead(Pb)-free/RoHS-compliant package.
T = Tape and reel.
/V denotes an automotive qualified part.

Chip Information

PROCESS: BiCMOS

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	7/02	Initial release	—
3	12/05	Added the lead-free notation	1
4	9/10	Added the automotive version of the MAX6746 and the MAX6753 and revised the *Typical Operating Characteristics*	1, 4
5	12/10	Added the automotive version of the MAX6750	1
6	4/11	Added the automotive version of the MAX6747	1
7	12/13	Added the automotive version of the MAX6751	1
8	2/14	Added a future product reference to MAX6751KA_ _ /V+T	1
9	5/14	Corrected typo	10
10	6/14	Added the automotive version of the MAX6752	1
11	9/15	Added MAX6752A to data sheet with new limits	2, 12, 14
12	12/15	Added lead-free part numbers to *Ordering Information* table and lead-free package code to *Package Information* table	14
13	2/16	Added MAX6752AKA32+T to *Ordering Information* table	14
14	9/16	Updated t_{WD} equation value in *Pin Configuration* table and *Applications Information* section	6, 10
15	1/17	Added text to *Transient Immunity* section and added Figure 8	10, 11
16	10/17	Added AEC qualification text to *Benefits and Features* section and updated *Ordering Information* table with additional part numbers	1, 14
17	12/17	Updated *Ordering Information* table with additional part numbers	14
18	3/18	Updated *Absolute Maxim Rating* and added *Package Information* section	2
19	12/18	Updated *Package Information*	2
20	2/19	Updated *Typical Operating Circuit* and Figure 6	1, 11
21	3/19	Changed the part number from MAX6450 to MAX6750 in Figure 7	12
22	9/19	Updated *Pin Description* table	7
23	3/25	Updated Table 2, Removed Table 3, Updated *Ordering Information* table	13, 14

ANALOG DEVICES

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.