



REV.	DATE	ECR NO.	DESCRIPTION
NC	10/14/09	XXXXXX	INITIAL RELEASE

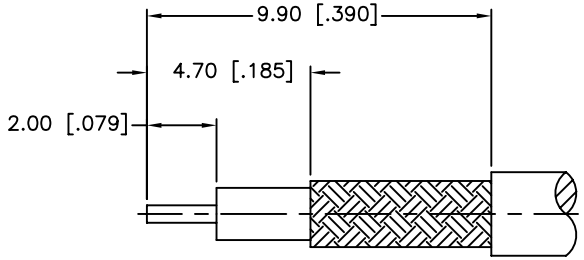


RECOMMENDED
CABLE STRIPPING DIM'S

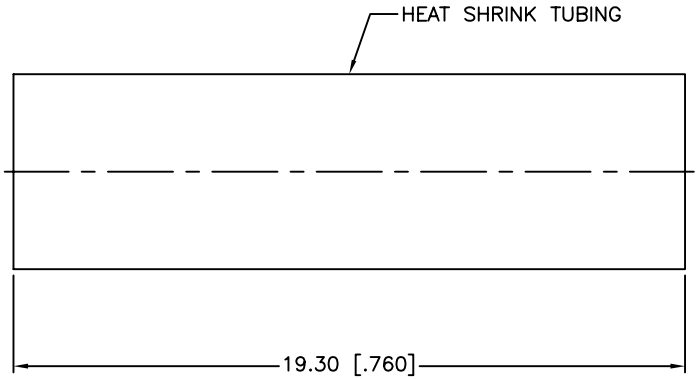

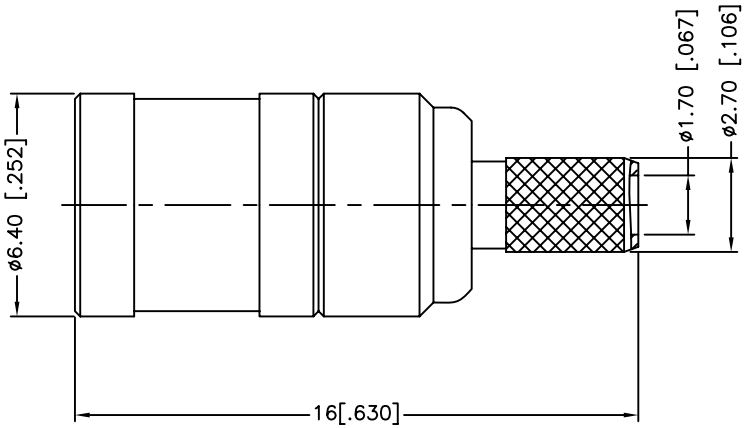

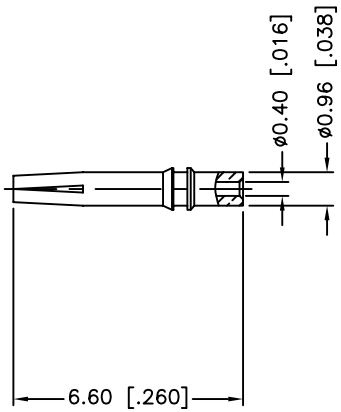

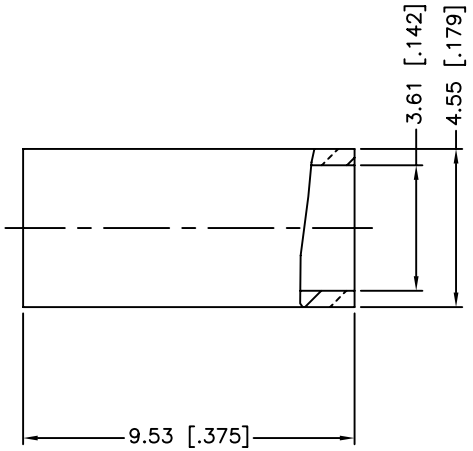

1. CRIMPED FERRULE
   HEX CRIMP SIZE .151"
2. CRIMPED CONTACT PIN
   SQ. CRIMP SIZE 0.7mm
   OR TO SOLDER

8	HEAT SHRINK TUBING		BLACK	1
7	FERRULE	BRASS	GOLD	1
6	CONTACT PIN	BER. COPPER	GOLD	1
5	SHELL	BRASS	GOLD	1
4	RETAINER RING	BER. COPPER	NATURAL	1
3	BARREL	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	10/14/09
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/CONNEX/142187–75.DWG

Amphenol Connex

PART DESCRIPTION
MINI 75 OHM SMB CRIMP PLUG
(FOR RG–179U/D CABLE)

PART NO. 142187–75

DWG. NO.	REV.	SIZE	SCALE
142187–75.DWG	NC	A	NA