
BRUSH LESS DC MOTOR PRE-DRIVER

■GENERAL DESRIPTION


The **NJM2624A** is a 3-phase brushless DC motor pre-driver which requires external power-transistors suited to drive current of the motor.

The Run Enable function is used as PWM control besides of ON/OFF switched function.


■PACHAGE OUTLINE



NJM2624AD



NJM2624AM




NJM2624AV

■FEATURES

- ●Operating Voltage (V^+=4.5V to 18V)
- ●Low Operating Current (10mA max.)
- ●Run Enable
- ●Forward or Reverse Direction
- ●Output Switch Current (90mA typ.)
- ●Bipolar Technology
- ●Package Outline DIP16, DMP16, SSOP16


■PIN CONFIGRATION

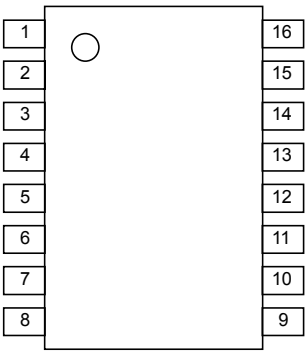

PIN FUNCTION

1.H1-	9.GND
2.H1+	10.ON/OFF
3.H2+	11.OUT1
4.H2-	12.OUT3
5.H3-	13.OUT5
6.H3+	14.OUT6
7.FR	15.OUT4
8.V^+	16.OUT2

■BLOCK DIAGRAM

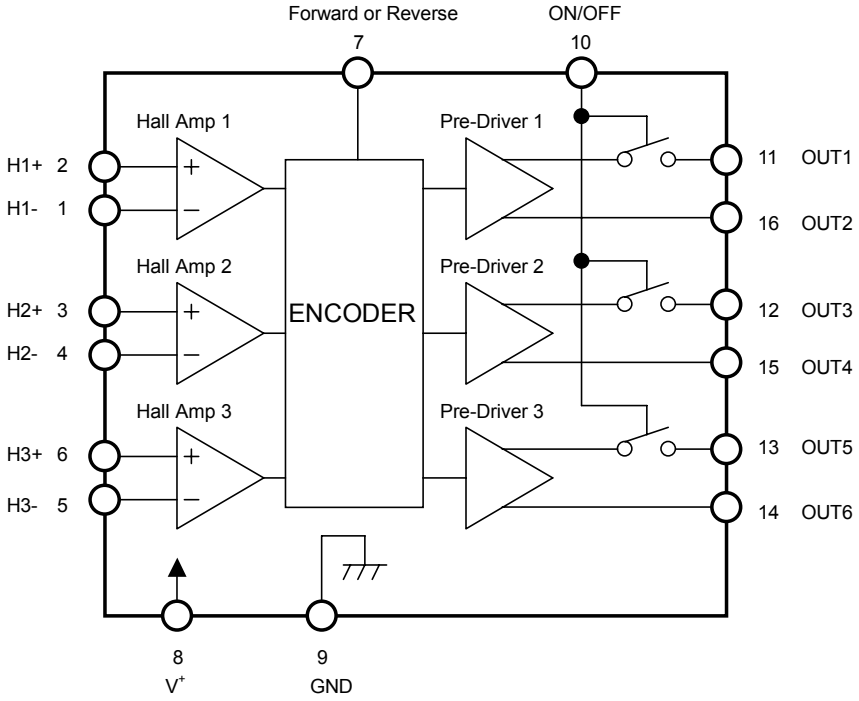

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	20	V
Output Current	I_O	100	mA
Power Dissipation	P_D	(DIP16) 700 (DMP16) 350 (SSOP16) 300	mW
Operating Temperature Range	Topr	-25 ~ +85	°C
Storage Temperature Range	Tstg	-40 ~ +150	°C

■ELECTRICAL CHARACTERISTICS (V^+=12V, Ta=25°C)

Total Device

PARAMETER	SYMBOL	TEST CONDTIONS	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V^+		4.5	–	18	V
Supply Current	I_{CC}	RL=∞ ON/OFF Terminal=OPEN	–	3.7	10	mA

Hall Sensor Section

Input Offset Voltage	V_{IO}	RL=470Ω	-4.2	–	4.2	mV
Input Common mode Voltage range	V_{ICM}	RL=470Ω	1.5	–	10.5	V
Input Bias Current	I_B		–	–	600	nA

Output Section

Output Voltage 1	V_{OUT1}	RL=470Ω, V^+=12V	8.9	9.5	–	V
Output Voltage 2	V_{OUT2}	RL=470Ω, V^+=5V	–	3.5	–	V
Maximum Output Current 1	I_{OUT1}	RL=100Ω, V^+=12V	50	90	–	mA
Maximum Output Current 2	I_{OUT2}	RL=100Ω, V^+=5V	–	30	–	mA
Output Leak Current	I_{LEAK}		–	–	5	μA



Run Enable Section

Run Enable Voltage	V_{ON}	RL=470Ω	$1/2V^+$+0.5	–	–	V
Run Disable Voltage	V_{OFF}	RL=470Ω	–	–	$1/2V^+$-0.5	V
Output Voltage Undefined Area	$V_{O\text{-}undef}$	RL=470Ω	$1/2V^+$-0.5	$1/2V^+$	$1/2V^+$+0.5	V
Source Current 1	I_{ON1}	ON/OFF Terminal=GND	–	250	400	μA



Forward or Reverse Direction Section

Forward Direction	V_F	RL=470Ω	$1/2V^+$+0.5	–	–	V
Reverse Direction	V_R	RL=470Ω	–	–	$1/2V^+$-0.5	V
F/R Logic Undefined Area	$V_{SW\text{-}undef}$	RL=470Ω	$1/2V^+$-0.5	$1/2V^+$	$1/2V^+$+0.5	V
Source Current 2	I_{ON2}	Forward or Reverse Terminal=GND	–	250	400	μA


■TERMINAL DESCRIPTION

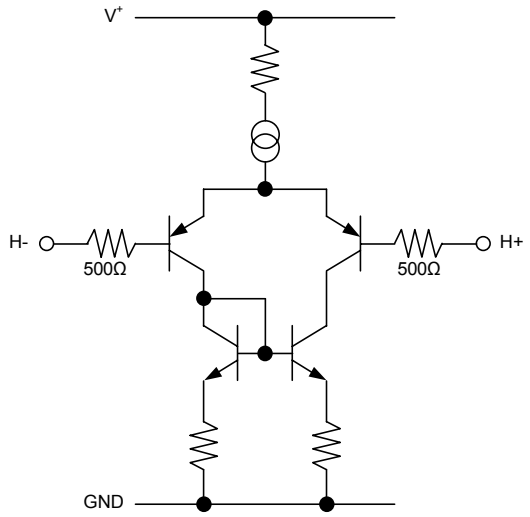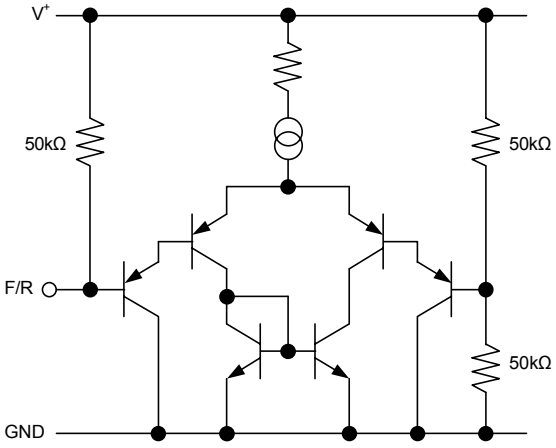Pin No,	SYMBOL	FUNCTION	INSIDE EQUIVALENT CIRCUIT
2	H1+	Sensor Input 1 Non-Inverting Terminal	
3	H2+	Sensor Input 2 Non-Inverting Terminal	
6	H3+	Sensor Input 3 Non-Inverting Terminal	
1	H1-	Sensor Input 1 Inverting Terminal	
4	H2-	Sensor Input 2 Inverting Terminal	
5	H3-	Sensor Input 3 Inverting Terminal	
7	F/R	Forward or Reverse Direction Terminal	


■TERMINAL DESCRIPTION

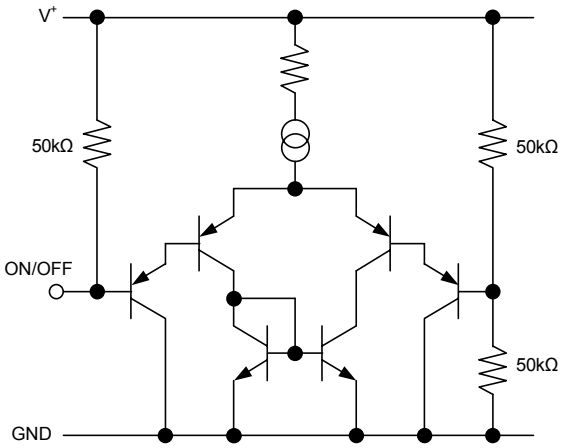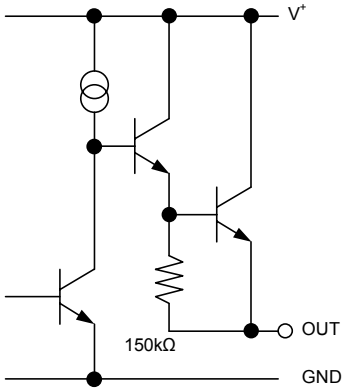Pin No,	SYMBOL	FUNCTION	INSIDE EQUIVALENT CIRCUIT
8	V^+	Power Supply	–
9	GND	Ground	–
10	ON/OFF	Output Run Enable Terminal	
11 16 12 15 13 14	OUT1 OUT2 OUT3 OUT4 OUT5 OUT6	Internal Switching Transistor Emitter Follower	

■TYPICAL APPLICATION

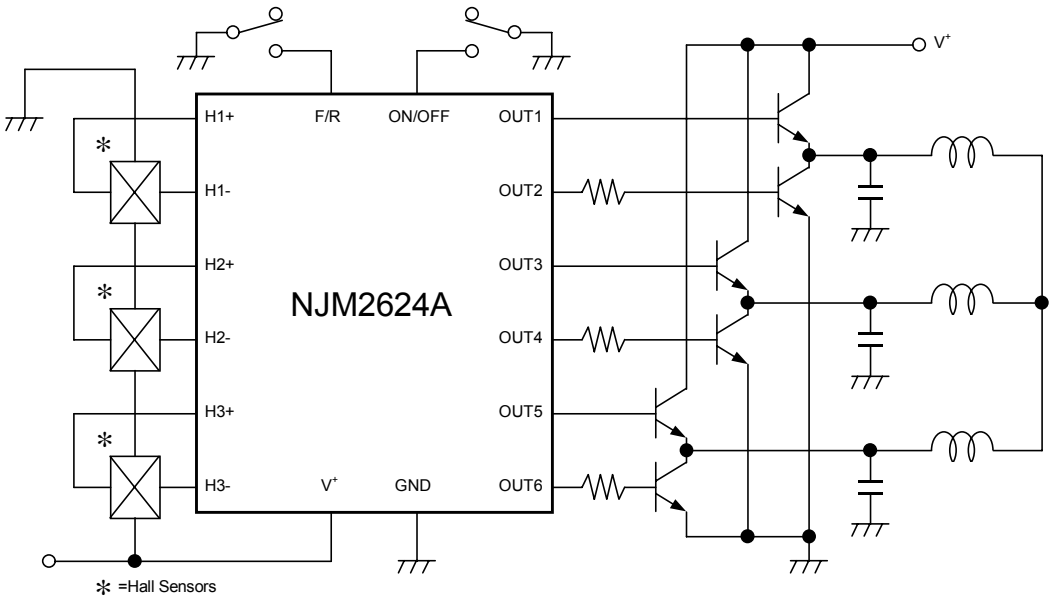


■TIMING CHART

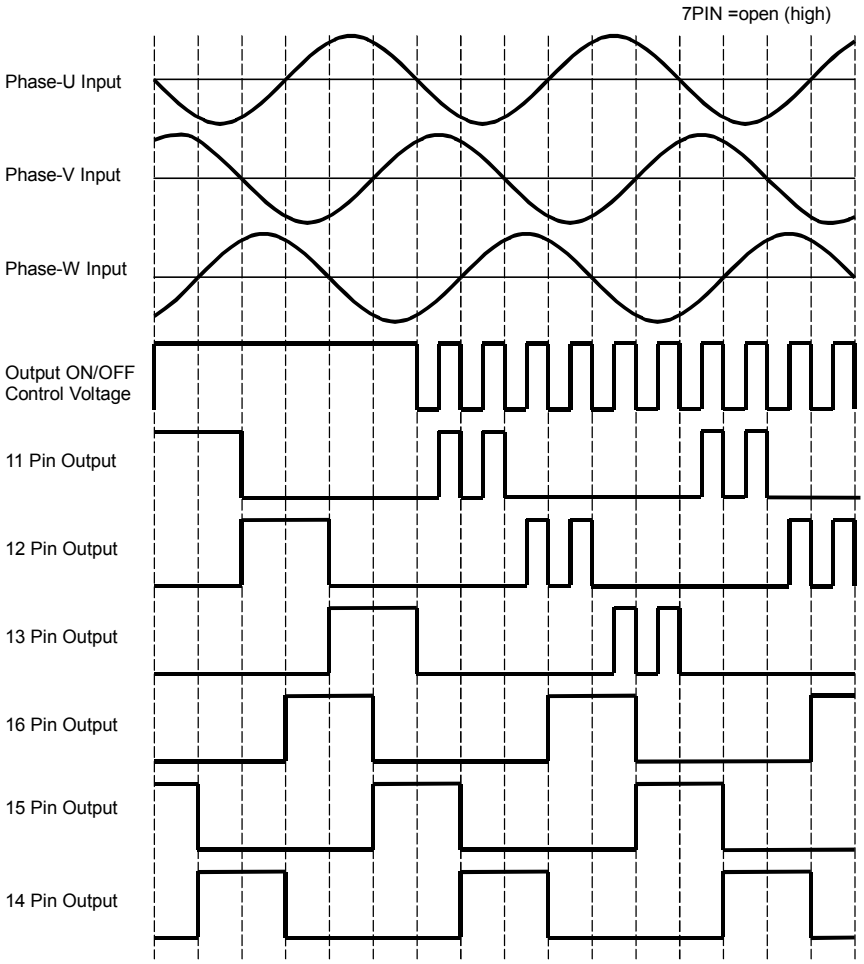


■TIPICAL CHARACTERISTICS


Supply Current vs. Supply Voltage
(Ta=25°C)

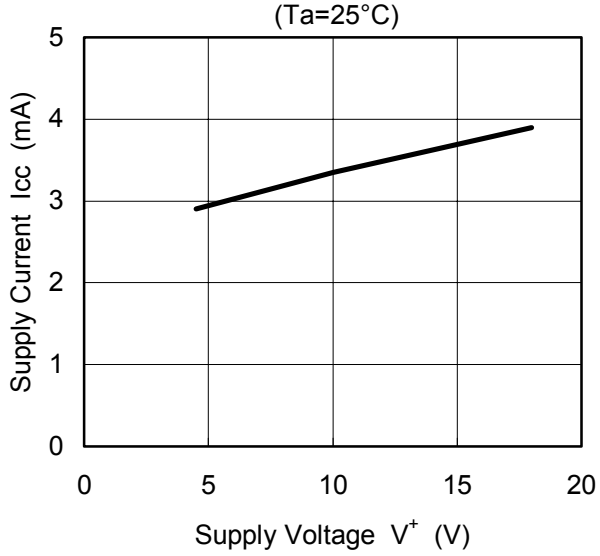


Input vs. Output（Offset）
(V^+=12V,RL=470Ω,Ta=25°C)

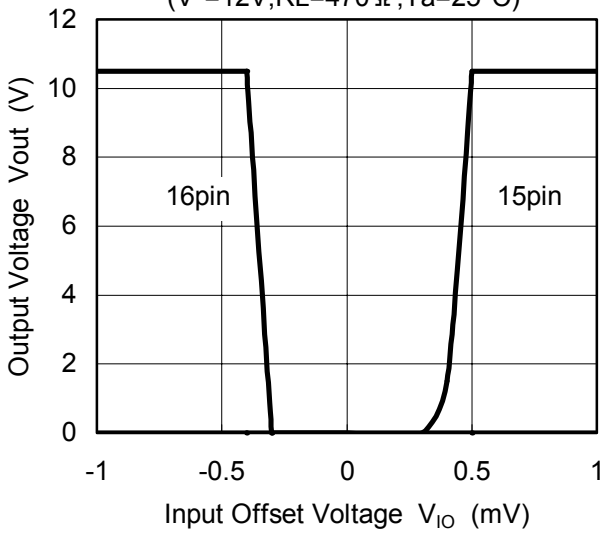


Input Bias Current vs. Supply Voltage
(Input=1/2V^+,Ta=25°C)

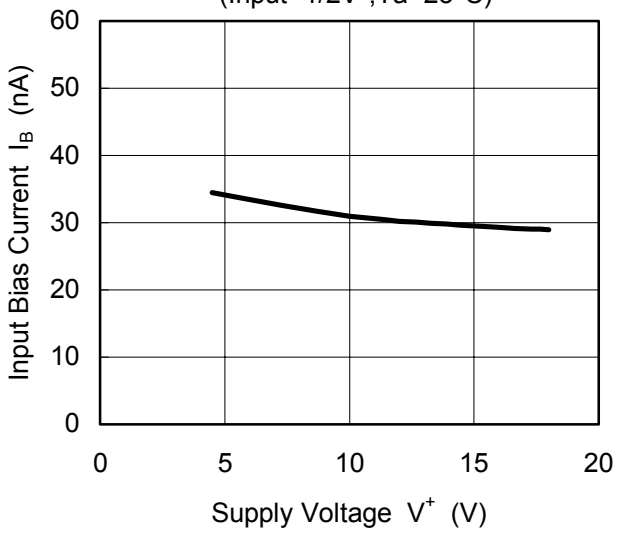

Output Voltage vs. Forward or Reverse Voltage
(V^+=12V,RL=470Ω,Ta=25°C)

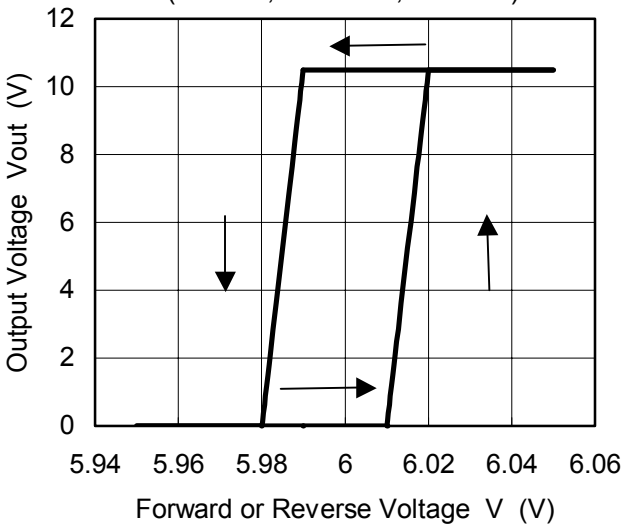


Output Voltage vs. Output ON/OFF Voltage
(V^+=12V,RL=470Ω,Ta=25°C)

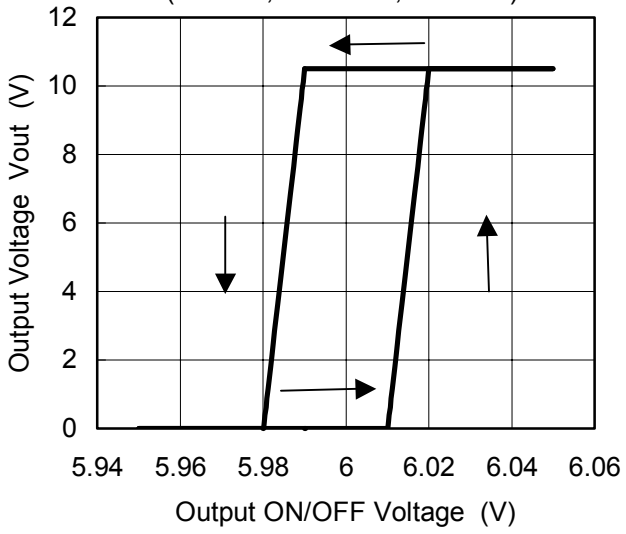


■TIPICAL CHARACTERISTICS


Maximum Output Current vs.Temperature
(V^+=12V,RL=100Ω)

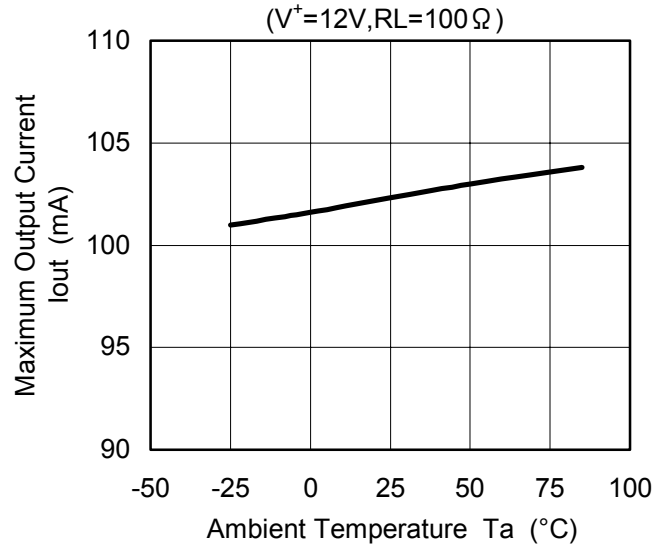


Supply Current vs.Temperature
(V^+=12V,RL=∞)

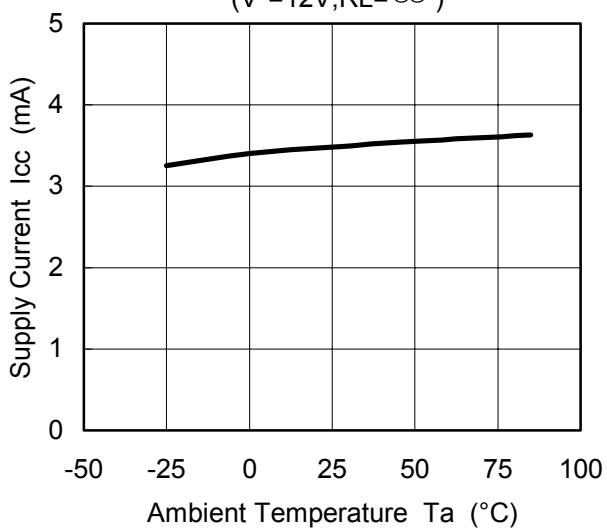

Output Leak Current vs.Temperature
(V^+=12V,RL=0Ω)

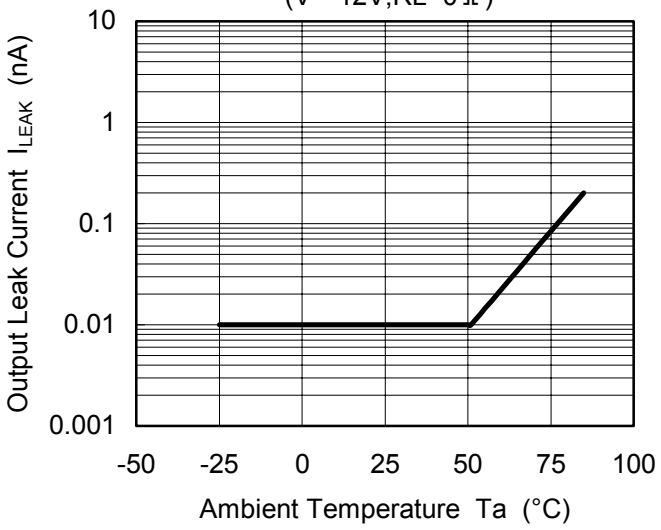

Input Bias Current vs.Temperature
(V^+=12V,Input=1/2V^+)

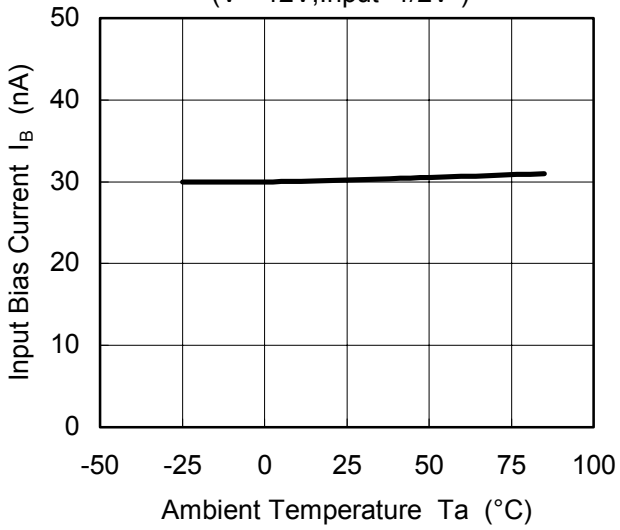

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.