Dual Low Offset, Low Power Operational Amplifier

Data Sheet

OP200

FEATURES

Low input offset voltage: 75 µV maximum
Low offset voltage drift, over −55°C < T_A < +125°C
0.5 µV/°C maximum
Low supply current (per amplifier): 725 µA maximum
High open-loop gain: 5000 V/mV minimum
Low input bias current: 2 nA maximum
Low noise voltage density: 11 nV/√Hz at 1 kHz
Stable with large capacitive loads: 10 nF typical

PIN CONNECTIONS




Figure 1. 16-Lead SOIC (S-Suffix)




Figure 2. 8-Lead PDIP (P-Suffix)
8-Lead CERDIP (Z-Suffix)

GENERAL DESCRIPTION

The OP200 is the first monolithic dual operational amplifier to offer OP77 type precision performance. Available in the industry standard 8-lead pinout, the OP200 combines precision performance with the space and cost savings offered by a dual amplifier.

The OP200 features an extremely low input offset voltage of less than 75 µV with a drift below 0.5 µV/°C, guaranteed over the full military temperature range. Open-loop gain of the OP200 exceeds 5,000,000 into a 10 kΩ load; input bias current is under 2 nA; CMRR is over 120 dB; and PSRR is below 1.8 µV/V. On-chip Zener zap trimming is used to achieve the extremely low input offset voltage of the OP200 and eliminates the need for offset pulling.

Power consumption of the OP200 is low, with each amplifier drawing less than 725 µA of supply current. The total current drawn by the dual OP200 is less than one-half that of a single OP07, yet the OP200 offers significant improvements over this industry-standard op amp. The voltage noise density of the OP200, 11 nV/√Hz at 1 kHz, is half that of most competitive devices.

The OP200 is an ideal choice for applications requiring multiple precision op amps and where low power consumption is critical.

For a quad precision op amp, see the OP400.

Rev. G **Document Feedback**
Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781.329.4700 **©1978–2017 Analog Devices, Inc. All rights reserved.**
Technical Support **www.analog.com**

TABLE OF CONTENTS

Features ... 1
Pin Connections ... 1
General Description ... 1
Revision History ... 2
Specifications ... 4
  Electrical Characteristics ... 4
Absolute Maximum Ratings ... 7
  Thermal Resistance ... 7
  ESD Caution ... 7
Typical Performance Characteristics ... 8
Applications Information ... 12
  Dual Low Power Instrumentation Amplifier ... 12
  Precision Absolute Value Amplifier ... 12
  Precision Current Pump ... 12
  Dual 12-Bit Voltage Output DAC ... 13
  Dual Precision Voltage Reference ... 13
  Programmable High Resolution Window Comparator ... 14
Outline Dimensions ... 15
  Ordering Guide ... 16

REVISION HISTORY

3/2017—Rev. F to Rev. G
Changes to Figure 21 ... 10

10/2015—Rev. E to Rev. F
Changes to General Description ... 1
Changes to Ordering Guide ... 16

9/2012—Rev. D to Rev. E
Changed Table 2 Conditions from V_S = 15 V to V_S = ±15 V ... 4
Updated Outline Dimensions ... 15
Changes to Ordering Guide ... 16

2/2009—Rev. C to Rev. D
Change to Large Signal Voltage Gain, Table 2 ... 4
Changes to Ordering Guide ... 16

8/2008—Rev. B to Rev. C
Updated Format ... Universal
Changes to Features Section ... 1
Changes to Table 1 and Table 2 ... 4
Changes to Table 3 and Table 4 ... 5
Deleted Table 7; Renumbered Sequentially ... 5
Changes to Figure 15 ... 9
Changes to Figure 21 ... 10
Changes to Figure 30 and Figure 31 ... 12
Changes to Programmable High Resolution Window Comparator Section, Figure 33, and Figure 34 ... 13
Changes to Figure 35 ... 14
Updated Outline Dimensions ... 15
Changes to Ordering Guide ... 16

2/2004—Rev. A to Rev. B.
OP200F Deleted ... Universal
Changes to Ordering Guide ... 5
Changes to Figure 4 ... 8
Updated Outline Dimension ... 11

4/2002—Rev. 0 to Rev. A.
Edits to Features ... 1
Edits to General Description ... 1
Edits to Ordering Information ... 1
Edits to Pin Connections ... 1
Edits to Absolute Maximum Ratings ... 2
Edits to Package Type ... 2

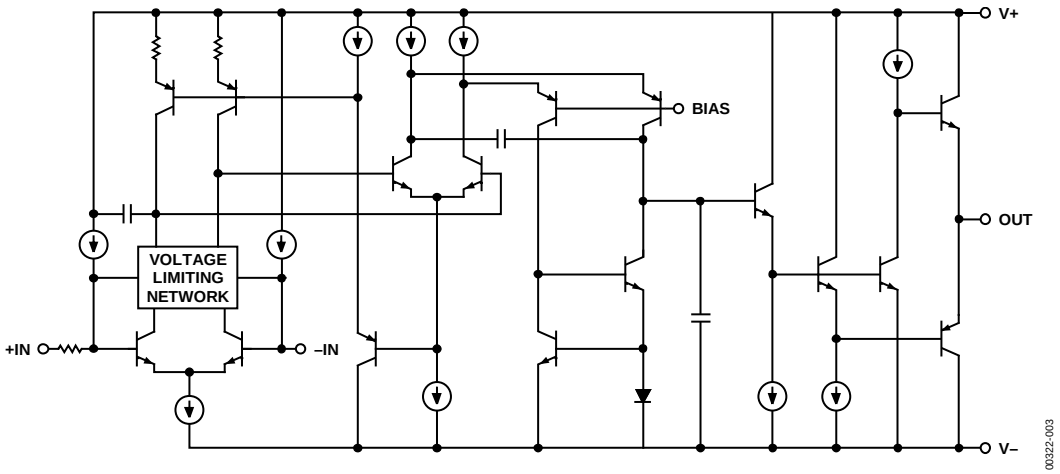


Figure 3. Simplified Schematic (One of Two Amplifiers Shown)

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

V_S = ±15 V, T_A = 25°C, unless otherwise noted.

Table 1.

Parameter	Symbol	Conditions	OP200A/OP200E			OP200G			Unit
			Min	Typ	Max	Min	Typ	Max	
INPUT CHARACTERISTICS									
Input Offset Voltage	V_{OS}			25	75		80	200	µV
Long-Term Input Voltage Stability				0.1			0.1		µV/mo
Input Offset Current	I_{OS}	V_{CM} = 0 V		0.05	1.0		0.05	3.5	nA
Input Bias Current	I_B	V_{CM} = 0 V		0.1	2.0		0.1	5.0	nA
Input Noise Voltage	e_n p-p	0.1 Hz to 10 Hz		0.5			0.5		µV p-p
Input Noise Voltage Density[1]	e_n	f_O = 10 Hz		22	36		22		nV/√Hz
		f_O = 1000 Hz		11	18		11		nV/√Hz
Input Noise Current	i_n p-p	0.1 Hz to 10 Hz		15			15		pA p-p
Input Noise Current Density	i_n	f_O = 10 Hz		0.4			0.4		pA/√Hz
Input Resistance Differential Mode	R_{IN}			10			10		MΩ
Input Resistance Common Mode	R_{INCM}			125			125		GΩ
Large Signal Voltage Gain	A_{VO}	V_O = ±10 V							
		R_L = 10 kΩ	5000	12,000		3000	7000		M/mV
		R_L = 2 kΩ	2000	3700		1500	3200		M/mV

[1] Sample tested.

V_S = ±15 V, −55°C ≤ T_A ≤ +125°C for OP200A, unless otherwise noted.

Table 2.

Parameter	Symbol	Conditions	OP200A			Unit
			Min	Typ	Max	
INPUT CHARACTERISTICS						
Input Offset Voltage	V_{OS}			45	125	µV
Average Input Offset Voltage Drift	TCV_{OS}			0.2	0.5	µV/°C
Input Offset Current	I_{OS}	V_{CM} = 0 V		0.15	2.5	nA
Input Bias Current	I_B	V_{CM} = 0 V		0.9	5.0	nA
Large Signal Voltage Gain	A_{VO}	V_O = 10 V				
		R_L = 10 kΩ	3000	9000		V/mV
		R_L = 2 kΩ	1000	2700		V/mV
Input Voltage Range[1]	IVR		±12	±12.5		V
Common-Mode Rejection Ratio	CMRR	V_{CM} = ±12 V	115	130		dB
Capacitive Load Stability		A_V = 1		8		nF
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	V_S = 3 V to 18 V		0.2	3.2	µV/V
Supply Current Per Amplifier	I_{SY}	No load		600	775	µA
OUTPUT CHARACTERISTICS						
Output Voltage Swing	V_O	R_L = 10 kΩ	±12	±12.4		V
		R_L = 2 kΩ	±11	±12		V

[1] Guaranteed by CMRR test.

V_S = ±15 V, T_A = 25°C, unless otherwise noted.

Table 3.

Parameter	Symbol	Conditions	OP200A/OP200E			OP200G			Unit
			Min	Typ	Max	Min	Typ	Max	
INPUT CHARACTERISTICS									
Input Voltage Range[1]	IVR		±12	±13		±12	±13		V
Common-Mode Rejection Ratio	CMRR	V_{CM} = ±12 V	120	135		110	130		dB
Channel Separation[2]	CS	V_O = 20 V p-p, f_O = 10 Hz	123	145		123	145		dB
Input Capacitance	C_{IN}			3.2			3.2		pF
Capacitive Load Stability		A_V = 1, no oscillations		10			10		nF
POWER SUPPLY									
Power Supply Rejection Ratio	PSRR	V_S = ±3 V to ±18 V		0.4	1.8		0.6	5.6	µV/V
Supply Current Per Amplifier	I_{SY}	No load		570	725		570	725	µA
OUTPUT CHARACTERISTICS									
Output Voltage Swing	V_O	R_L= 10 kΩ	±12	±12.6		±12	±12.6		V
		R_L = 2 kΩ	±11	±12.2		±11	±12.2		V
DYNAMIC PERFORMANCE									
Slew Rate	SR		0.1	0.15		0.1	0.15		V/µs
Gain Bandwidth Product	GBP	A_V = 1		500			500		kHz

[1] Guaranteed by CMRR test.
[2] Guaranteed but not 100% tested.

V_S = ±15 V, −40°C ≤ T_A ≤ +85°C, unless otherwise noted.

Table 4.

Parameter	Symbol	Conditions	OP200E			OP200G			Unit
			Min	Typ	Max	Min	Typ	Max	
INPUT CHARACTERISTICS									
Input Offset Voltage	V_{OS}			35	100		110	300	µV
Average Input Offset Voltage Drift	TCV_{OS}			0.2	0.5		0.6	2.0	µV/°C
Input Offset Current	I_{OS}	V_{CM} = 0 V		0.08	2.5		0.1	6.0	nA
Input Bias Current	I_B	V_{CM} = 0 V		0 3	5.0		0.5	10.0	nA
Large-Signal Voltage Gain	A_{VO}	V_O = ±10 V							
		R_L= 10 kΩ	3000	10,000		2000	5000		V/mV
		R_L = 2 kΩ	1500	3200		1000	2500		V/mV
Input Voltage Range[1]	IVR		±12	±12.5		±12	±12.5		V
Common-Mode Rejection Ratio	CMRR	V_{CM} = ±12 V	115	130		105	130		dB
Capacitive Load Stability		A_V = 1, no oscillations		10			10		nF
POWER SUPPLY									
Power Supply Rejection Ratio	PSRR	V_S = ±3 V to ±18 V		0.15	3.2		0.3	10.0	µV/V
Supply Current Per Amplifier	I_{SY}	No load		600	775		600	775	µA
OUTPUT CHARACTERISTICS									
Output Voltage Swing	V_O	R_L = 10 kΩ	±12	±12.4		±12	±12.4		V
		R_L = 2 kΩ	±11	±12		±11	±12.2		V

[1] Guaranteed by CMRR test.

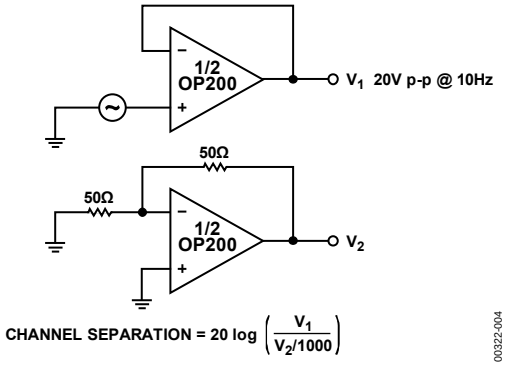


Figure 4. Channel Separation Test Circuit

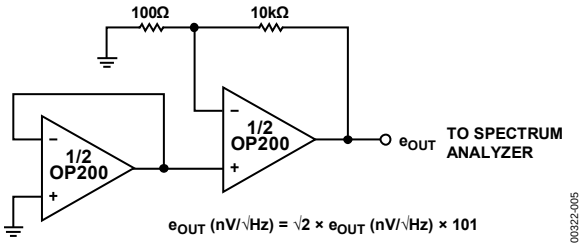


Figure 5. Noise Test Schematic

ABSOLUTE MAXIMUM RATINGS

Table 5.

Parameter	Rating
Supply Voltage	±20 V
Differential Input Voltage	±30 V
Input Voltage	Supply voltage
Output Short-Circuit Duration	Continuous
Storage Temperature Range	−65°C to +150°C
Lead Temperature (Soldering, 60 sec)	300°C
Junction Temperature Range (T_J)	−65°C to +150°C
Operating Temperature Range	
OP200A	−55°C to +125°C
OP200E, OP200G	−40°C to +85°C

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

THERMAL RESISTANCE

Table 6.

Package Type	θ_{JA}[1]	θ_{JC}	Unit
8-Lead CERDIP (Z Suffix)	148	16	°C/W
8-Lead Plastic DIP (P Suffix)	96	37	°C/W
16-Lead SOIC (S Suffix)	92	27	°C/W

[1] θ_{JA} is specified for worst-case mounting conditions, that is, θ_{JA} is specified for device in socket for CERDIP and PDIP packages; θ_{JA} is specified for device soldered to printed circuit board for SOIC package.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

TYPICAL PERFORMANCE CHARACTERISTICS

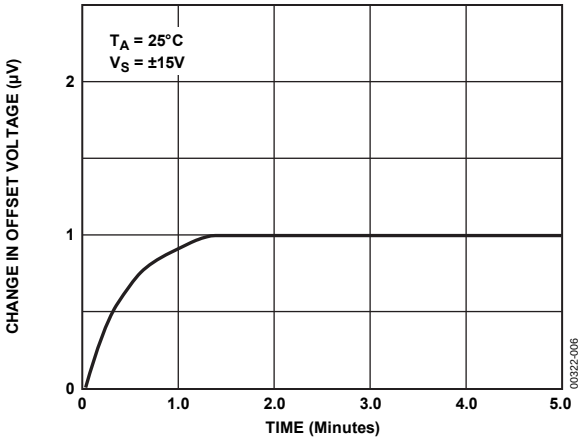


Figure 6. Warm-Up Drift

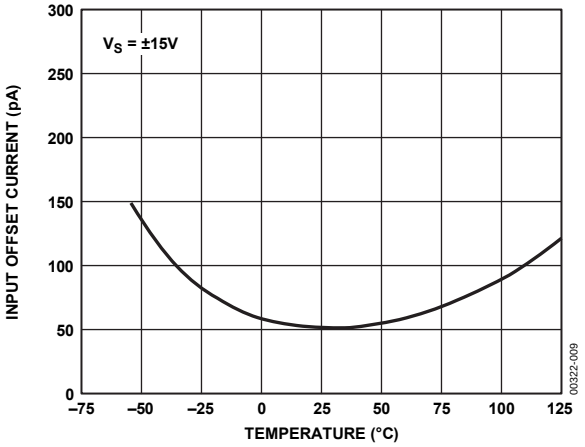


Figure 9. Input Offset Current vs. Temperature

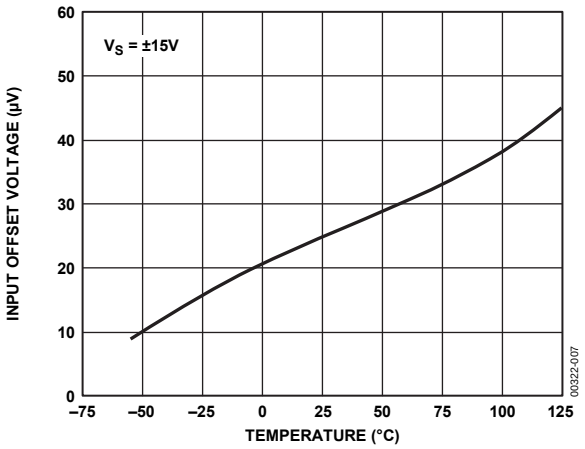


Figure 7. Input Offset Voltage vs. Temperature

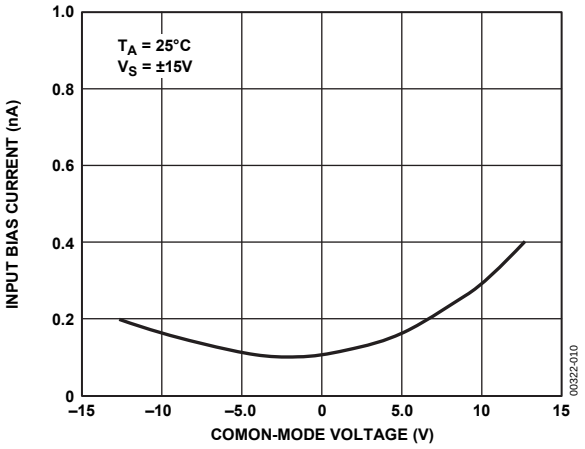


Figure 10. Input Bias Current vs. Common-Mode Voltage

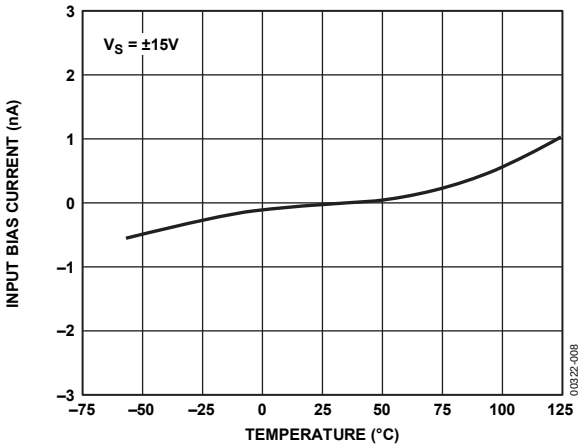


Figure 8. Input Bias Current vs. Temperature

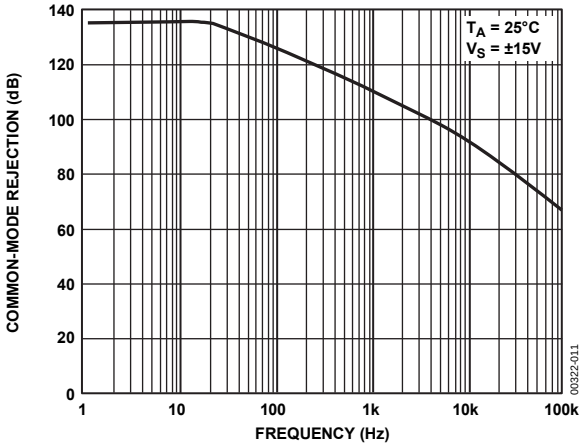


Figure 11. Common-Mode Rejection vs. Frequency

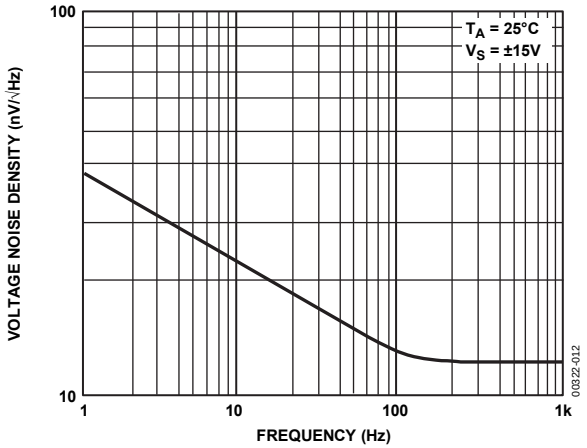


Figure 12. Voltage Noise Density vs. Frequency

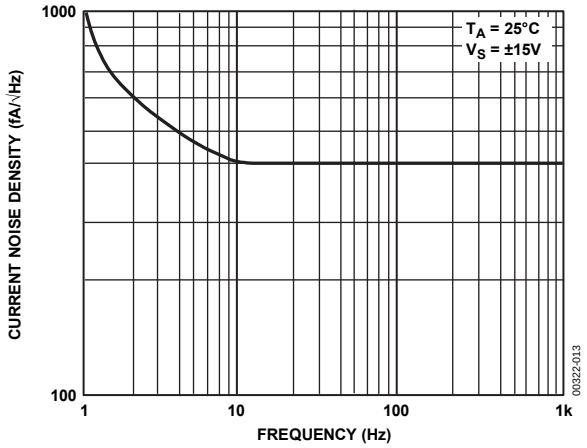


Figure 13. Current Noise Density vs. Frequency

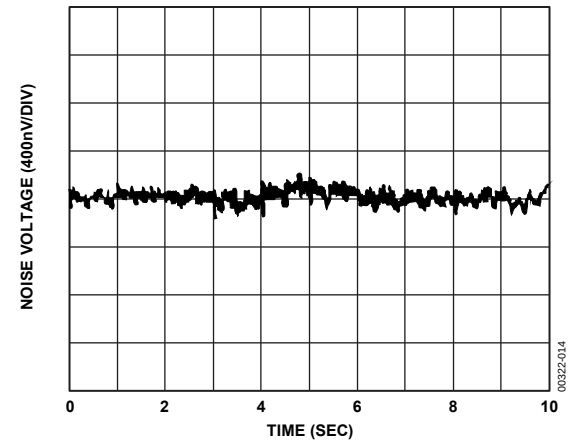


Figure 14. 0.1 Hz to 10 Hz Noise

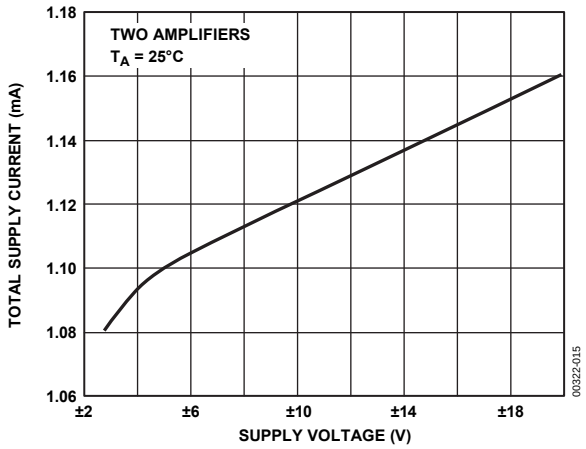


Figure 15. Total Supply Current vs. Supply Voltage

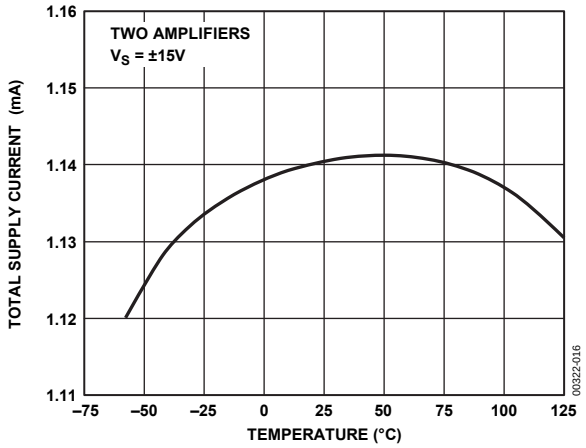


Figure 16. Total Supply Current vs. Temperature

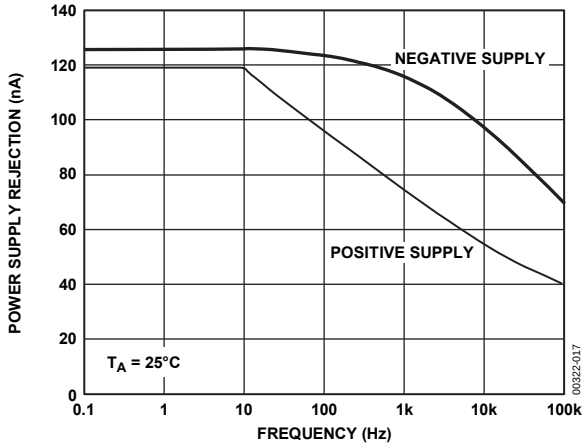


Figure 17. Power Supply Rejection vs. Frequency

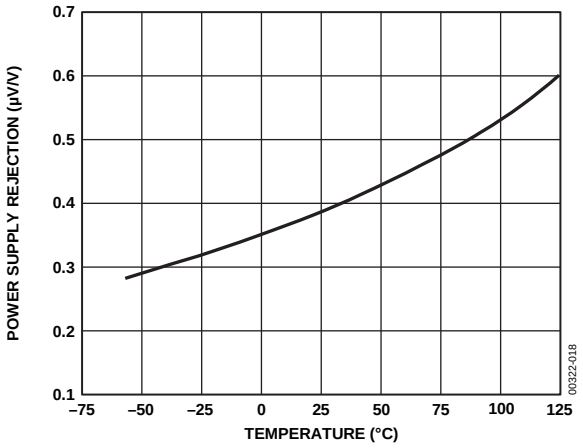


Figure 18. Power Supply Rejection vs. Temperature

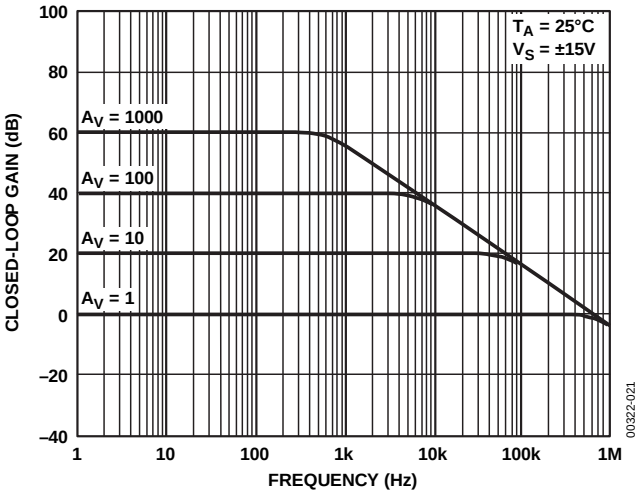


Figure 21. Closed-Loop Gain vs. Frequency

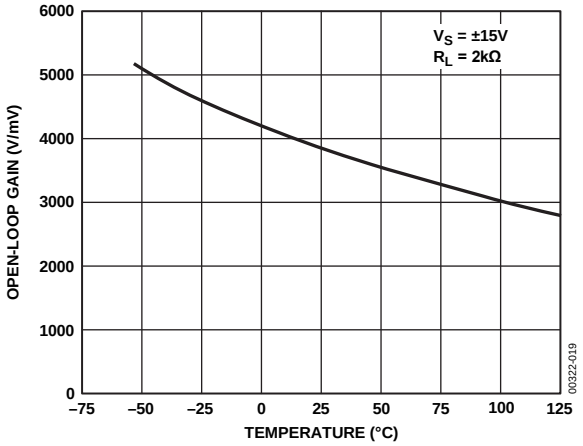


Figure 19. Open-Loop Gain vs. Temperature

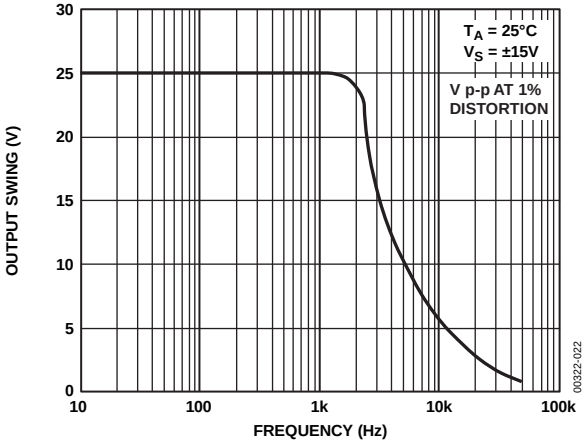


Figure 22. Maximum Output Swing vs. Frequency

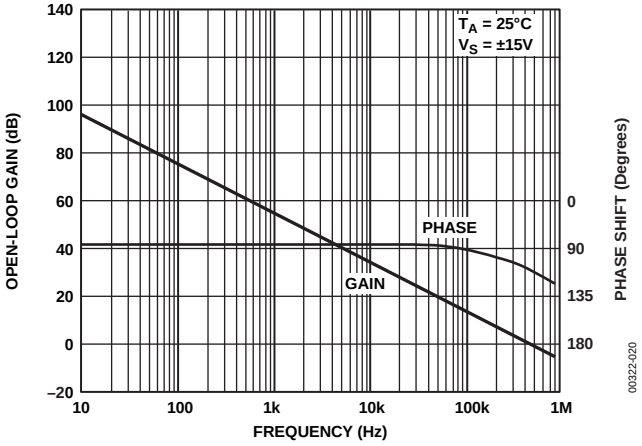


Figure 20. Open-Loop Gain and Phase Shift vs. Frequency

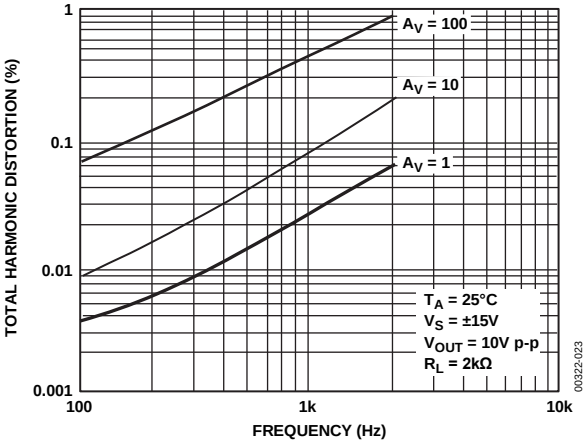


Figure 23. Total Harmonic Distortion vs. Frequency

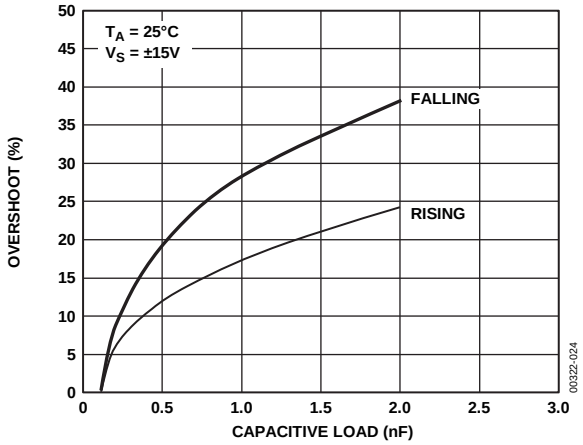


Figure 24. Overshoot vs. Capacitive Load

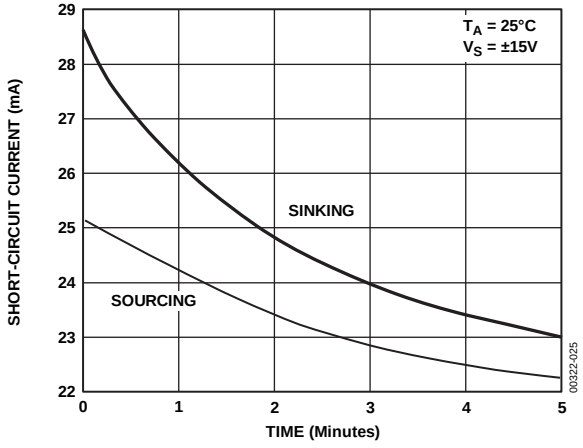


Figure 25. Short-Circuit Current vs. Time

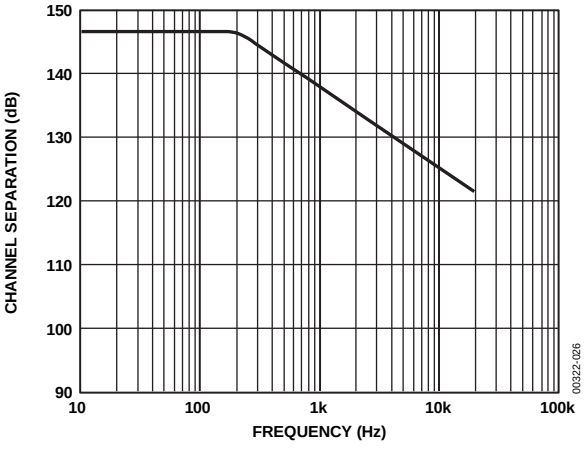


Figure 26. Channel Separation vs. Frequency

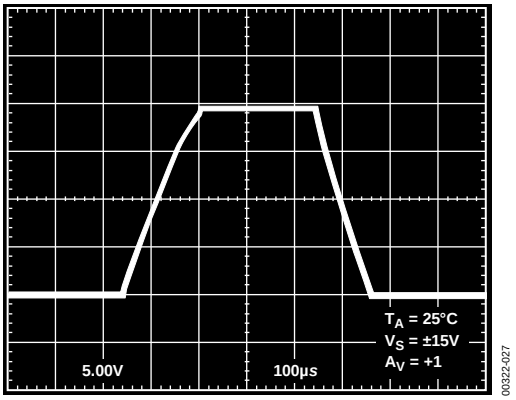


Figure 27. Large Signal Transient Response

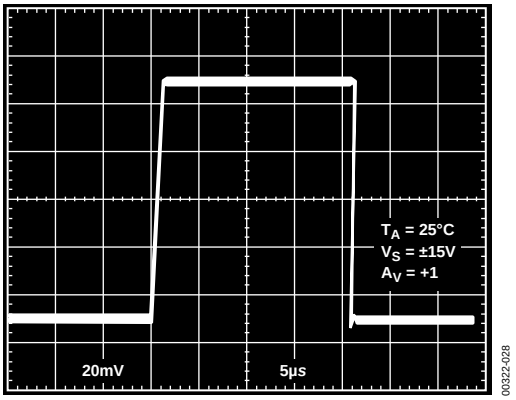


Figure 28. Small Signal Transient Response

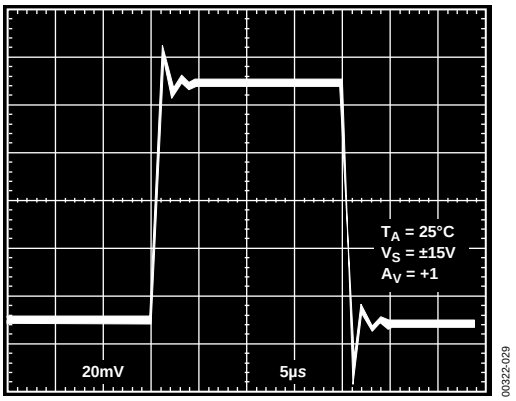


Figure 29. Small Signal Transient Response, C_{LOAD} = 1 nF

APPLICATIONS INFORMATION

The OP200 is inherently stable at all gains and is capable of driving large capacitive loads without oscillating. Nonetheless, good supply decoupling is highly recommended. Proper supply decoupling reduces problems caused by supply line noise and improves the capacitive load driving capability of the OP200.

DUAL LOW POWER INSTRUMENTATION AMPLIFIER

A dual instrumentation amplifier that consumes less than 33 mW of power per channel is shown in Figure 30. The linearity of the instrumentation amplifier exceeds 16 bits in gains of 5 to 200 and is better than 14 bits in gains from 200 to 1000. CMRR is above 115 dB (gain = 1000). Offset voltage drift is typically 0.2 µV/°C over the military temperature range, which is comparable to the best monolithic instrumentation amplifiers. The bandwidth of the low power instrumentation amplifier is a function of gain and is shown in Table 7.

Table 7. Gain Bandwidth

Gain	Bandwidth
5	150 kHz
10	67 kHz
100	7.5 kHz
1000	500 Hz

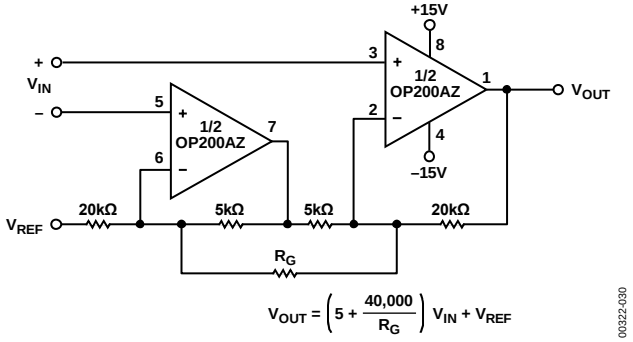


Figure 30. Dual Low Power Instrumentation Amplifier

The output signal is specified with respect to the reference input, which is normally connected to analog ground. The reference input can be used to offset the output from −10 V to +10 V if required.

PRECISION ABSOLUTE VALUE AMPLIFIER

The circuit in Figure 31 is a precision absolute value amplifier with an input impedance of 10 MΩ. The high gain and low TCV_{OS} of the OP200 ensure accurate operation with microvolt input signals. In this circuit, the input always appears as a common-mode signal to the op amps. The CMRR of the OP200 exceeds 120 dB, yielding an error of less than 2 ppm.

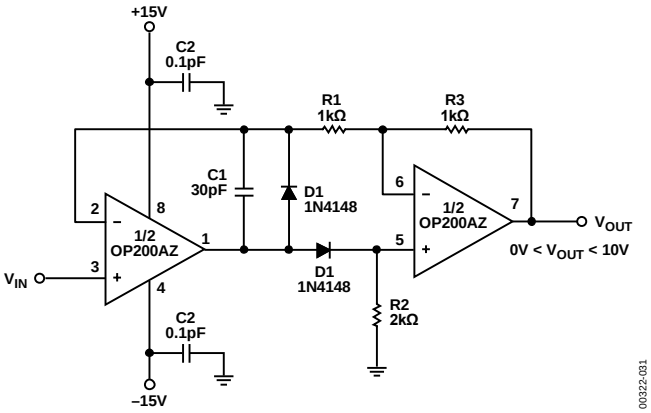


Figure 31. Precision Absolute Value Amplifier

PRECISION CURRENT PUMP

The maximum output current of the precision current pump shown in Figure 32 is ±10 mA. Voltage compliance is ±10 V with ±15 V supplies. Output impedance of the current transmitter exceeds 3 MΩ with linearity better than 16 bits.

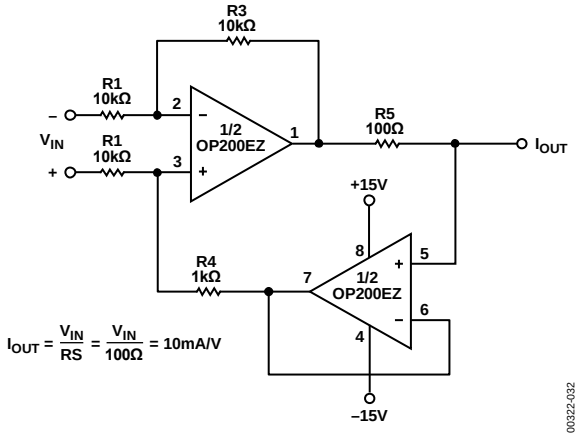


Figure 32. Precision Current Pump

DUAL 12-BIT VOLTAGE OUTPUT DAC

The dual output DAC shown in Figure 33 is capable of providing untrimmed 12-bit accurate operation over the entire military temperature range. Offset voltage, bias current, and gain errors of the OP200 contribute less than 1/10 of an LSB error at 12 bits over the military temperature range.

DUAL PRECISION VOLTAGE REFERENCE

A dual OP200 and a REF43, a 2.5 V reference, can be used to build a ±2.5 V precision voltage reference. Maximum output current from each reference is ±10 mA with load regulation under 25 µV/mA. Line regulation is better than 15 µV/V and output voltage drift is under 20 µV/°C. Output voltage noise from 0.1 Hz to 10 Hz is typically 75 µV p-p. R1 and D1 ensure correct startup.

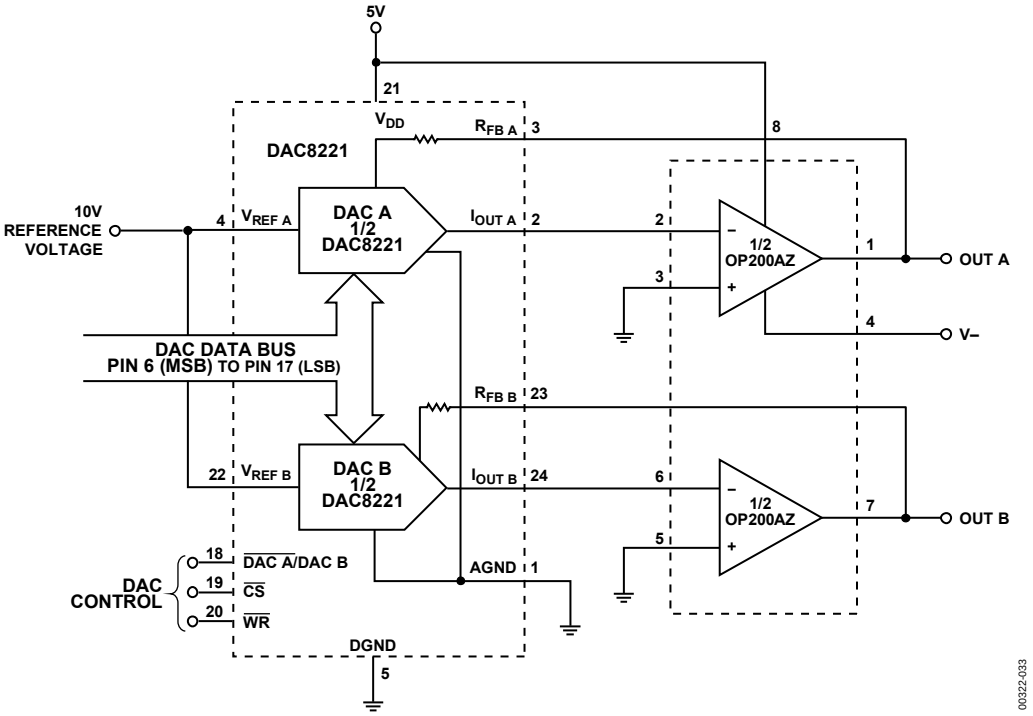


Figure 33. Dual 12-Bit Voltage Output DAC

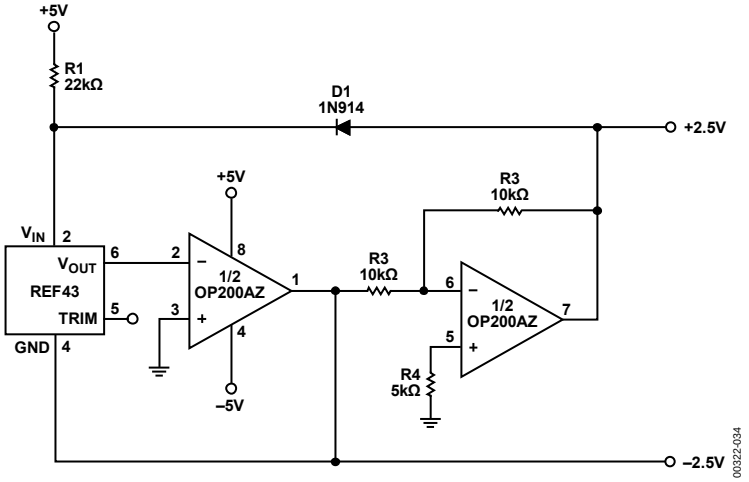


Figure 34. Dual Precision Voltage Reference

PROGRAMMABLE HIGH RESOLUTION WINDOW COMPARATOR

The programmable window comparator shown in Figure 35 is easily capable of 12-bit accuracy over the full military temperature range. A dual CMOS 12-bit DAC, the DAC8221, is used in the voltage switching mode to set the upper and lower thresholds (DAC A and DAC B, respectively).


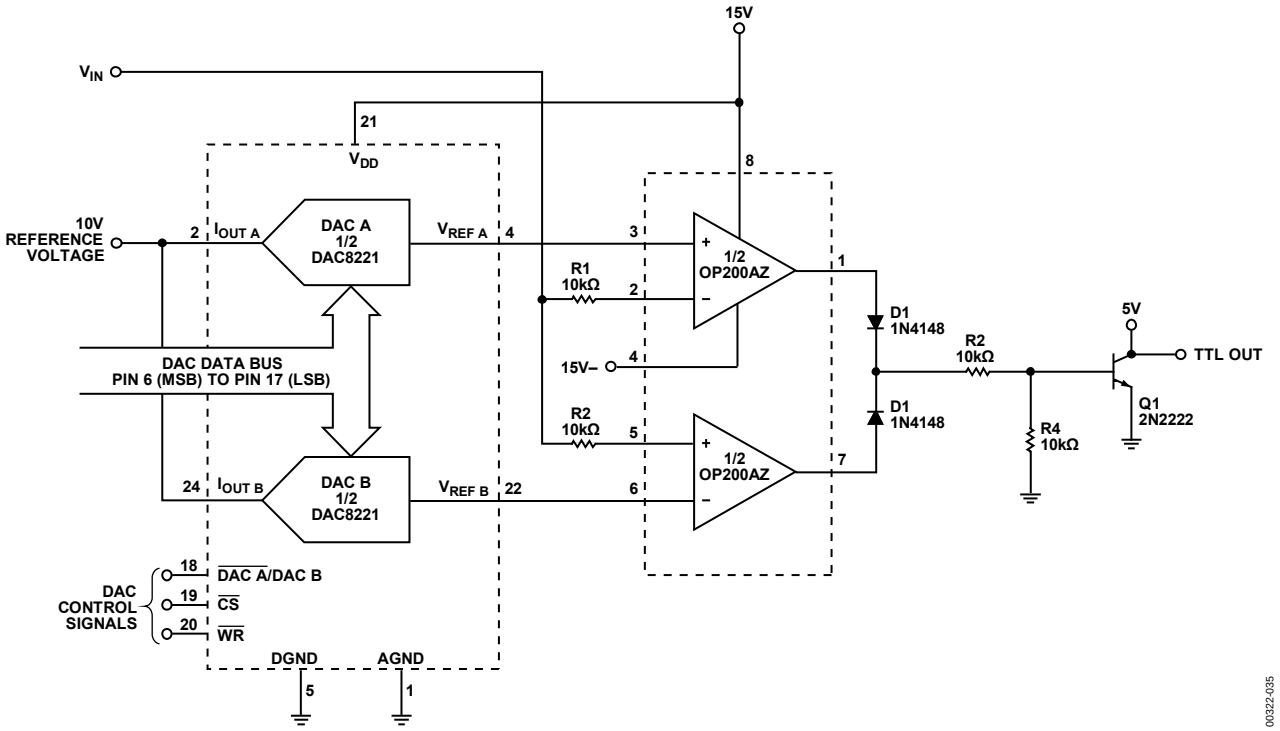



Figure 35. Programmable High Resolution Window Comparator

OUTLINE DIMENSIONS

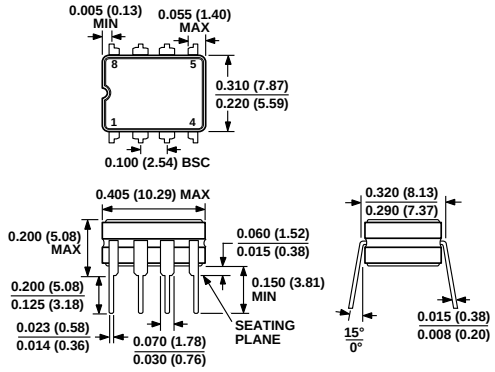

CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 36. 8-Lead Ceramic Dual In-Line Package [CERDIP]
(Q-8)
Z-Suffix
Dimensions shown in inches and (millimeters)

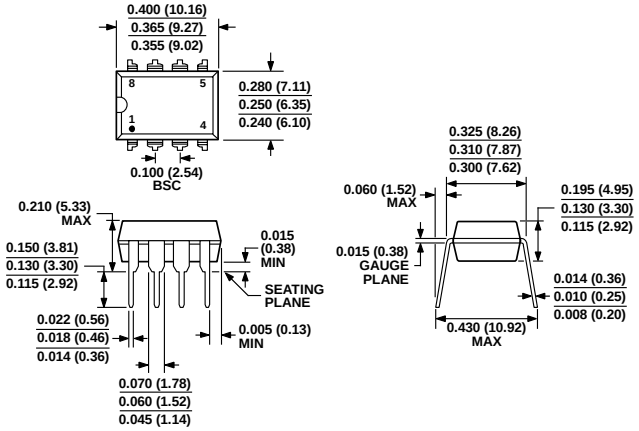

COMPLIANT TO JEDEC STANDARDS MS-001
CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.
CORNER LEADS MAY BE CONFIGURED AS WHOLE OR HALF LEADS.

070606-A

Figure 37. 8-Lead Plastic Dual In-Line Package [PDIP]
(N-8)
P-Suffix
Dimensions shown in inches and (millimeters)

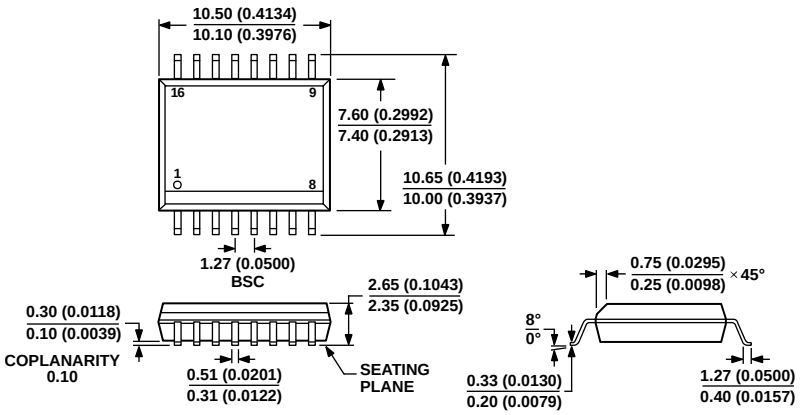


Figure 38. 16-Lead Standard Small Outline Package [SOIC_W]
Wide Body
(RW-16)
S-Suffix
Dimensions shown in millimeters and (inches)

ORDERING GUIDE

Model[1]	T_A = 25°C V_{OS} Max (µV)	Temperature Range	Package Description	Package Option
OP200AZ	75	−55°C to +125°C	8-Lead CERDIP	Z-Suffix (Q-8)
OP200EZ	75	−40°C to +85°C	8-Lead CERDIP	Z-Suffix (Q-8)
OP200GPZ	200	−40°C to +85°C	8-Lead PDIP	P-Suffix (N-8)
OP200GSZ	200	−40°C to +85°C	16-Lead SOIC_W	S-Suffix (RW-16)
OP200GSZ-REEL	200	−40°C to +85°C	16-Lead SOIC_W	S-Suffix (RW-16)

[1] The OP200GPZ, OP200GSZ, and OP200GSZ-REEL are RoHS Compliant Parts.

©1978–2017 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.
D00322-0-3/17(G)